


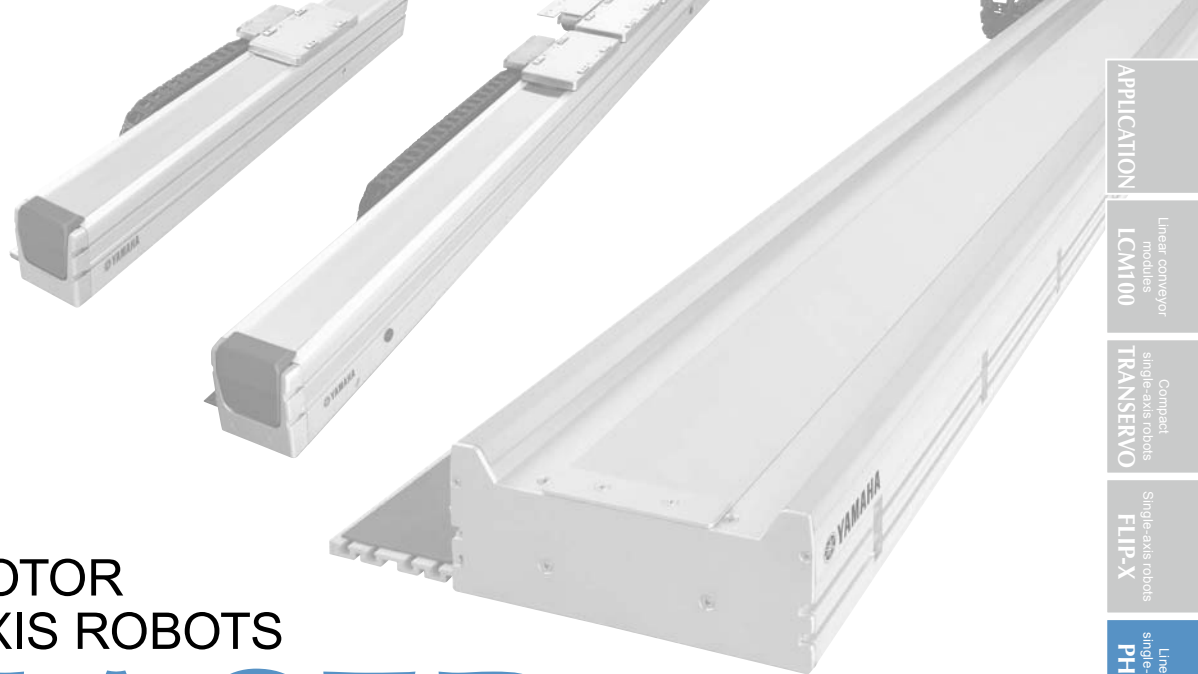

LINEAR MOTOR SINGLE-AXIS ROBOTS

PHASER SERIES

CONTENTS

■ PHASER SPECIFICATION SHEET	184
------------------------------------	-----

■ Robot ordering method description	184
---	-----

■ Robot ordering method terminology	185
---	-----

MF TYPE

MF7/MF7D	186
MF15/MF15D	192
MF20/MF20D	196
MF30/MF30D	199
MF75/MF75D	202

MR TYPE

MR12/MR12D	204
------------------	-----

APPLICATION

Linear conveyor
modules
LCM100

Compact
single-axis robots
TRANSERVO

Single-axis robots
FLIP-X

Linear motor
single-axis robots
PHASER

Cartesian
robots
XY-X

SCARA
robots
YK-X

Pick & place
robots
YP-X

CLEAN

CONTROLLER

INFORMATION

MF type

MR type

PHASER SPECIFICATION SHEET

Type	Size (mm) ^{Note 1}	Model	Carrier	Maximum payload (kg)	Maximum speed (mm/sec.)	Stroke (mm)	Detailed info page
MF type Flat type with core Linear motor specifications	W85 × H80	MF7	Single	10 (7) ^{Note 2}	2500	100 to 4000 (Horizontal) 100 to 2000 (Wall mount)	P.186
		MF7D	Double			100 to 3800 (Horizontal) 100 to 1800 (Wall mount)	P.186
	W100 × H80	MF15	Single	30 (15) ^{Note 2}		100 to 4000 (Horizontal) 100 to 2000 (Wall mount)	P.192
		MF15D	Double			100 to 3800 (Horizontal) 100 to 1800 (Wall mount)	P.192
	W150 × H80	MF20	Single	40 (20) ^{Note 2}		150 to 4050	P.196
		MF20D	Double			150 to 3850	P.196
		MF30	Single	60 (30) ^{Note 2}		100 to 4000	P.199
		MF30D	Double			150 to 3750	P.199
	W210 × H100	MF75	Single	160 (75) ^{Note 2}		1000 to 4000	P.202
		MF75D	Double			680 to 3680	P.202
MR type Shaft type Linear motor specifications	W60 × H90	MR12	Single	5	50 to 1050	P.204	
		MR12D	Double		50 to 1050	P.204	

Note 1. The size shows approximate maximum cross sectional size.

Note 2. When using at the maximum speed, the maximum payload becomes the value in ().

⚠ Precautions for use

■ Handling

- Please be sure to read "PHASER Series Instruction Manual" carefully to have full understanding of its contents before using this product and strictly observe each instruction.
- Dropping or hitting this product may cause it to break. Always handle it carefully.
- Never disassemble this product. Entry of a foreign object will cause deterioration of accuracy.
- This product uses a magnetic type linear scale. Do not bring anything that generates a strong magnetic field near the robot itself as it may cause damage to the linear scale.

■ Installation place and environment

When installing this product, avoid the place where any of the following conditions applies.

- The ambient temperature is outside of the 0 °C to 40 °C range.
- Dielectric powder such as iron powder, dust, moist, salt or organic solvent is produced and flies in the air.
- Strong electric field, strong magnetic field, etc. occur.
- The product is affected by vibration or impact.

- Dewing occurs, or corrosive gas or combustible gas is generated.
- The product is exposed to direct sun or radiant heat.
- A noise source exists in the surrounding area.
- Inspection and cleaning cannot be performed.

■ Safety precaution

- A high performance rare earth magnets are used in the motor section of this product. For this reason, bringing a magnetic response type device or a medical device such as a heart pace maker close to the robot may cause it to malfunction. Be careful not to bring such a device close to the robot.

Robot ordering method description

In the order format for the YAMAHA linear motor single-axis robots PHASER series, the notation (letters/numbers) for the mechanical section is shown linked to the controller section notation.

[Example]

● Mechanical ▶ MF20

- Cable carrier take out direction ▶ RH
- Optional cable carrier for users ▶ S
- Origin position ▶ Change (R side)
- Grease ▶ Standard
- Stroke ▶ 550mm
- Cable length ▶ 3.5m

● Controller ▶ SR1-P

- Regenerative unit ▶ Required
- I/O selection ▶ NPN

● Ordering method

MF20 - RH - S - Z - 550 - 3L - SR1 - P10 - R - N

Mechanical section

Controller section

This page describes using the ordering form for mechanical components.

To find detailed controller information see the controller page.

SR1-P ▶ [P.478](#), TS-P ▶ [P.452](#), RDV-P ▶ [P.469](#)

Mechanical section










● Single carriage

① Model	② Cable carrier entry location	④ Optional cable carrier for users	⑤ Origin position change	⑥ Grease type	⑦ Stroke	⑧ Cable length
MF7 MF7A	RH Horizontal, right	No entry None	No entry L side	No entry Standard		3L 3.5m
MF15 MF15A	LH Horizontal, left	S S type	Z R side	GC Clean		5L 5m
MF20 MF20A	RW Wall mounted, right	M M type				10L 10m
MF30 MF30A	LW Wall mounted, left	L L type				3K 3.5m
MF75 MF75A						5K 5m
						10K 10m

● Double carriage

① Model	③ Installing direction	④ Optional cable carrier for users	⑥ Grease type	⑦ Stroke	⑧ Cable length
MF7D MF7AD	H Horizontal installation	No entry None	No entry Standard		3L 3.5m
MF15D MF15AD		S S type	GC Clean		5L 5m
MF20D MF20AD	W Wall mounted installation	M M type			10L 10m
MF30D MF30AD		L L type			3K 3.5m
MF75D MF75AD					5K 5m
					10K 10m

Robot ordering method terminology

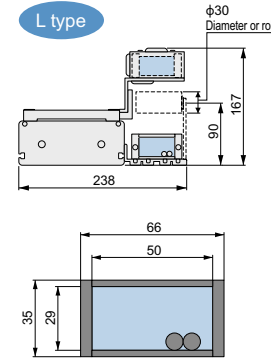① Model	Enter the robot unit model. Select from 2 types: incremental specifications and semi-absolute specifications.
② Cable carrier entry location	Select what direction to install the robot (horizontal / wall mounted) and what direction to extract the robot cable carrier. RH Horizontal, right  RW Wall hanging, right  LH Horizontal, left  LW Wall hanging, left  Note. Be sure to install in the direction as specified (in cable carrier take-out direction drawing and various specification drawings) individually. Installation in any other way will cause a failure. For requirement of installation in any way other than the above standard installation, please consult YAMAHA as special arrangement will be available.
③ Installing direction	Select what direction to install the robot (horizontal / wall mounted). Please specify if a cable carrier is needed for customer wiring. [MF type] (For MF20) S type  M type  L type  φ30 Diameter or roller Cable and pipe guide S : φ8 flexible cable x 1, φ4 air tube x 1 M : φ8 flexible cable x 2, φ6 air tube x 2 L : φ8 flexible cable x 2, φ8 air tube x 3 Space for optional cable for users [MR type] S type  M type  Space for optional cable for users Note. The cable and air hoses should take up less than 30% of the space when storing them inside the cable carrier. Lay out the cables and air hoses in rows inside the cable carrier so they do not cross each other.
⑤ Origin position change	Origin point position can be changed.
⑥ Grease type	Clean grease can be selected.
⑦ Stroke	Select the stroke for the robot operating range.
⑧ Cable length	Select the length of the robot cable connecting the robot to the controller. 3L : 3.5m (Standard) 5L : 5m 10L : 10m 3K : 3.5m (Flexible cable) 5K : 5m (Flexible cable) 10K : 10m (Flexible cable)

APPLICATION

Linear conveyor modules
LCM100

Compact single-axis robots
TRANSERO

Single-axis robots
FLIP-X

Linear motor single-axis robots
PHASER

Cartesian robots
XY-X

SCARA robots
YK-X

Pick & place robots
YP-X

CLEAN

CONTROLLER

INFORMATION

MF type

MR type

MF7/MF7D

- Flat type available
- Can be used for wall-mount



Ordering method

Single carriage model

MF7						TSP			
Model MF7: Incremental MF7A: Semi-absolute ^{Note 1}	Cable carrier entry location RH: Horizontal, right LH: Horizontal, left FRH: Horizontal, right (Flat) FLH: Horizontal, left (Flat) RW: Wall mount, right LW: Wall mount, left	Optional cable carrier for users^{Note 2} No entry: None S: S type M: M type L: L type	Origin position change No entry: L side (Standard) Z: R side No entry: R side (Standard) Z: L side	Grease type No entry: Standard GC: Clean	Stroke^{Note 3} Horizontal (100mm pitch) 100 to 4000 (100mm pitch) Wall 100 to 2000 (100mm pitch)	Cable length^{Note 4} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable) ^{Note 5}	Positioner^{Note 6} TS-P	Driver: Power-supply voltage / Power capacity 110: 100V/200W 210: 200V/200W	LCD monitor No entry: None L: With LCD
						SR1-P	10		
						Controller	Driver: Power capacity 10: 200W	Usable for CE No entry: Standard E: CE marking	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ GW: No I/O board ^{Note 7}
						RDV-P	2	10	RBR1
						Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 10: 200W or less	Regenerative unit

Double carriage model

MF7D						RCX221			
Model MF7D: Incremental MF7AD: Semi-absolute ^{Note 1}	Installing direction H: Horizontal installation FH: Horizontal installation (Flat) W: Wall mount installation	Optional cable carrier for users^{Note 2} No entry: None S: S type M: M type L: L type	Grease type No entry: Standard GC: Clean	Stroke^{Note 3} Horizontal (100mm pitch) 100 to 3800 (100mm pitch) Wall 100 to 1800 (100mm pitch)	Cable length^{Note 4} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable) ^{Note 5}	Controller RCX221 SR1-P (2 units) TS-P (2 units) RDV-P (2 units)	Usable for CE No entry: Standard E: CE marking	I/O selection 1 N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS EN: Ethernet	I/O selection 2 No entry: None Nt: OPDIO24/16 (NPN) Pt: OPDIO24/17 (PNP) EN: Ethernet

Note 1. Semi-absolute models are supported by the SR1-P, TS-P and RCX221. For the details of the semi-absolute model, please refer to P.29.

RDV-P has an incremental model only.

Note 2. For models with a 2,100mm or longer stroke, optional L type cable carriers can only be used. Flat type cannot be selected for L type.

Note 3. Maximum stroke for flat type is 2000mm.

Note 4. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.524 for details on robot cable.

Note 5. If a flexible cable is needed for the SR1-P, TS-P, or RDV-P, then select 3K/5K/10K. On the RCX221, the standard cable is a flexible cable, so enter 3L/5L/10L when ordering.

Note 6. These controllers can be mounted on DIN rails. See P.460 for details.

Note 7. Select this selection when using the gateway function. For details, see P.453.

Note. It is possible to provide the model without a cable carrier. To find information on wiring (cable terminals) within the cable carrier see P.532.


Specifications^{Note}

Model	MF7	MF7D
Driving method	Steel cored linear motor with falt magnet	
Repeatability (μm)	+/-5	
Scale (μm)	Magnetic type: resolution of 1	
Maximum speed^{Note 2} (mm/sec)	2500	
Rated thrust (N)	37	
Maximum payload (kg)	10 ^{Note 1}	
Stroke (mm)	Horizontal	100 to 4000 (100mm pitch)
	Wall mount	100 to 3800 (100mm pitch)
	Horizontal	100 to 2000 (100mm pitch)
	Wall mount	100 to 1800 (100mm pitch)
Linear guide	4 rows of circular arc grooves × 1 rail	
Maximum cross-section outside dimensions (mm)	W85 × H80	
Total length (mm)	Stroke+280	
Cable length (m)	Standard: 3.5 / Option: 5.10	

Note. A vertical model (with brake) is not available with the PHASER series.
Note. The basic specifications of semi-absolute model are the same as those of the incremental model.

Note 1. Payload per carrier. When the payload exceeds 7kg, please consult our sales office or sales representative.

Note 2. Table of maximum speed

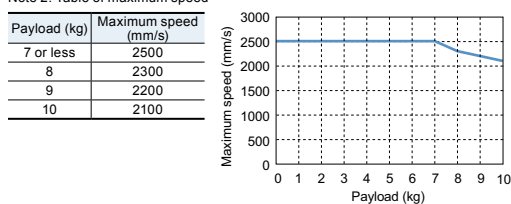

Allowable overhang^{Note}

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)			
	A	B	C		A	B	C
1kg	3000	3000	680	1kg	700	3000	3000
3kg	3000	1350	215	3kg	195	1260	3000
5kg	2900	830	125	5kg	90	630	2480
7kg	2400	580	85	7kg	50	360	1680
9kg	2200	460	60				
10kg	2100	410	55				

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.


Static loading moment

(Unit: N·m)		
MY	MP	MR
156	156	194

Controller

Controller	Operating method
SR1-P10	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221 RCX240/340	
TS-P110	I/O point trace / Remote command
TS-P210	
RDV-P210-RBR1	Pulse train control

Cable carrier entry location

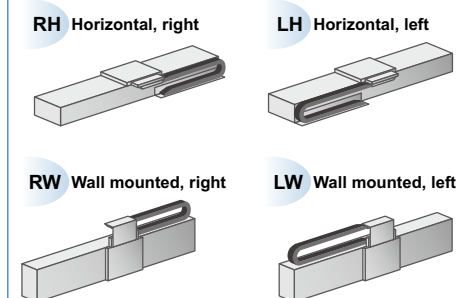


Note. Be sure to install in the direction as specified (in cable carrier take-out direction drawing and various specification drawings) individually. Installation in any other way will cause a failure. For requirement of installation in any way other than the above standard installation, please consult YAMAHA as a special arrangement will be available.


Optional cable carrier for users

S type	M type	L type
Cable and air tube guide		
S: φ8 flexible cable x 1, φ4 air tube x 1 M: φ8 flexible cable x 2, φ6 air tube x 2 L: φ8 flexible cable x 2, φ8 air tube x 3		
Space for optional cable for users		


MF7 single carriage horizontal mount model **RH**

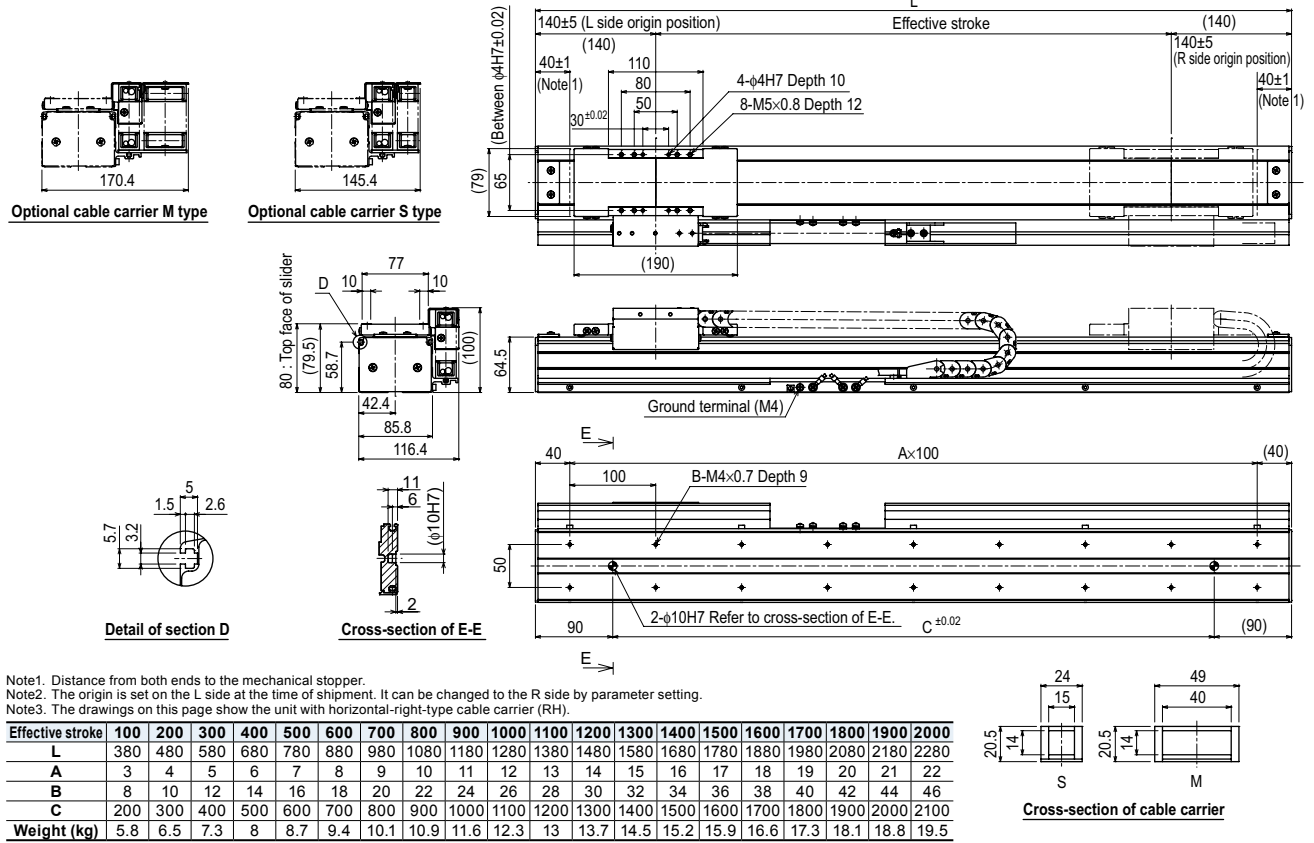

MF7 single carriage wall mount model **RW**

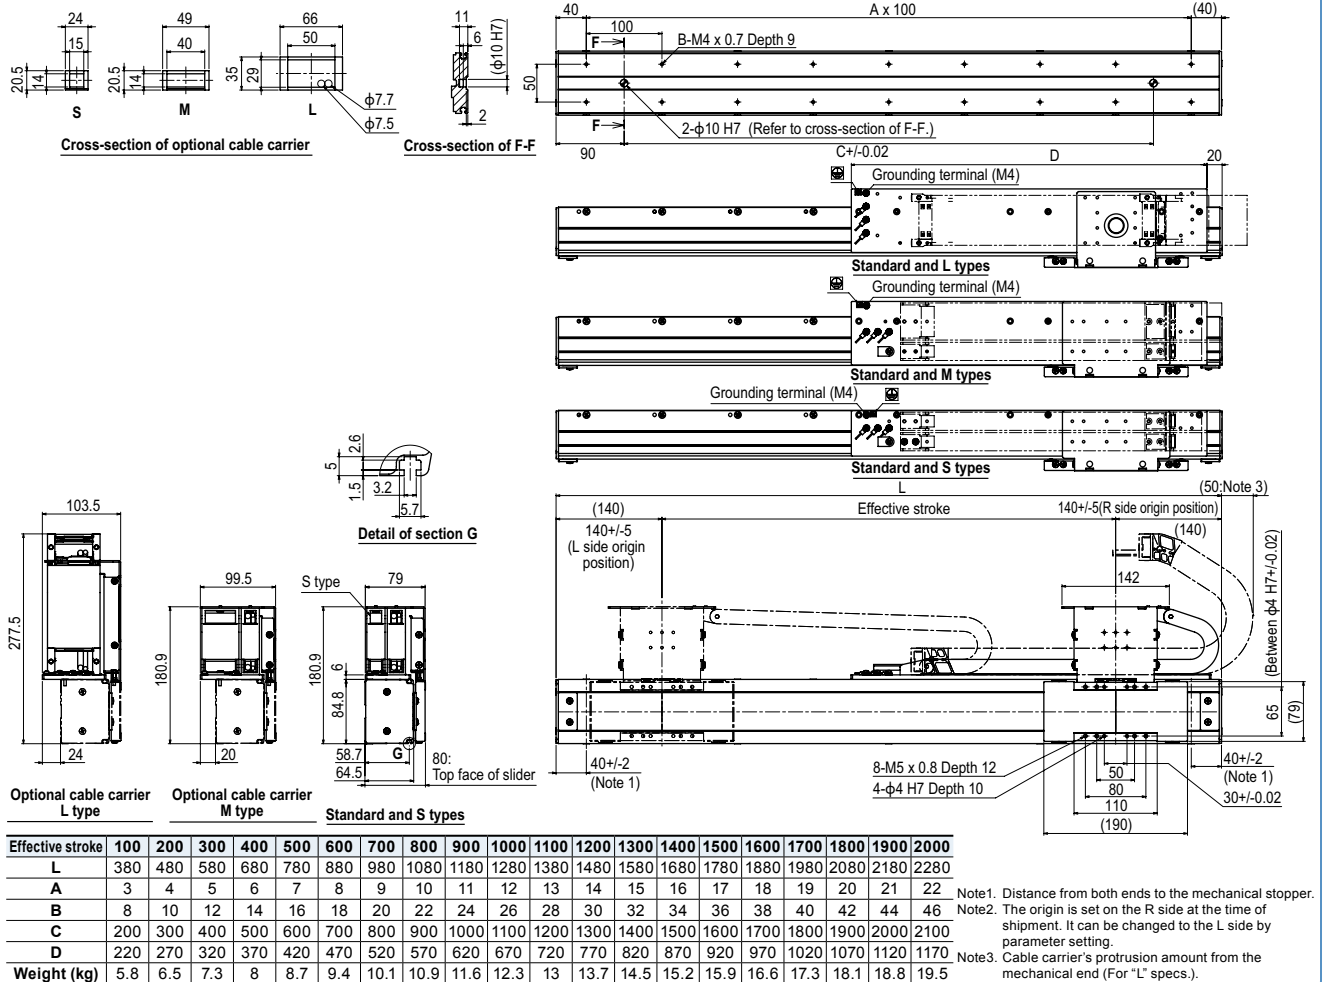

MF7/MF7D

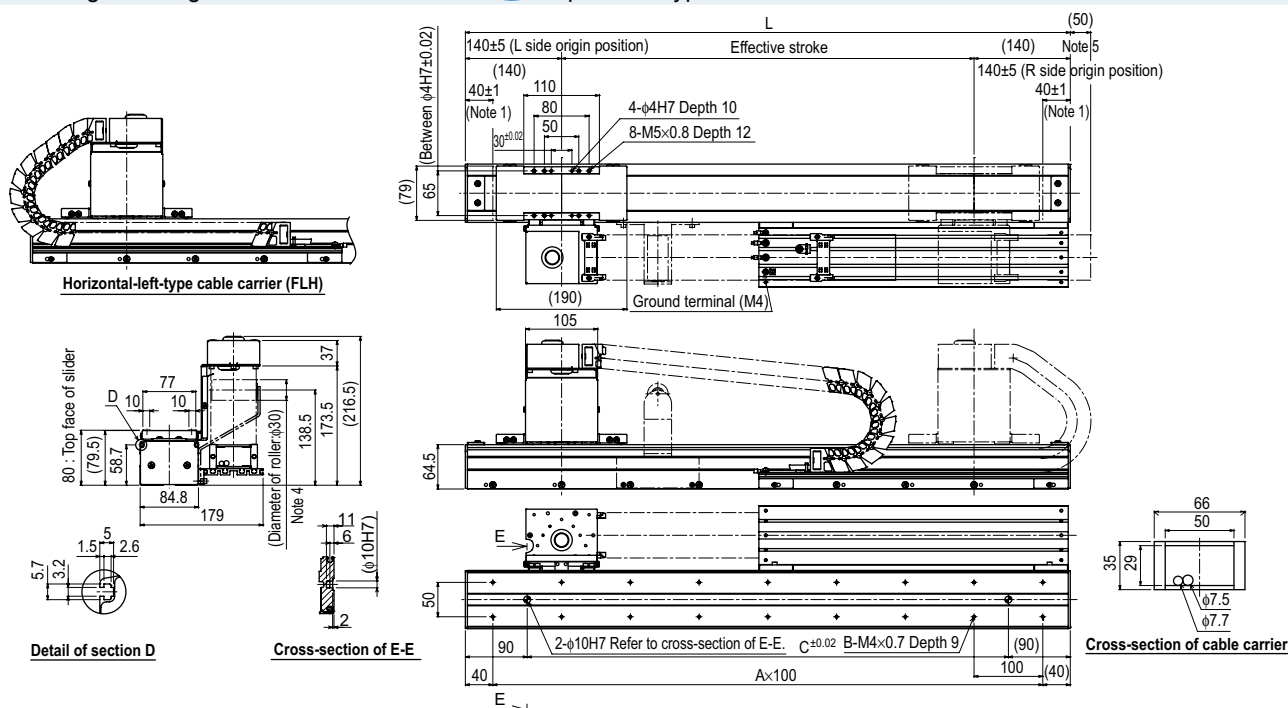MF7 single carriage horizontal mount model **RH-L** Optional L-type cable carrier

Note1. Distance from both ends to the mechanical stopper.


Note2. The origin is set on the L side at the time of shipment. It can be changed to the R side by parameter setting.

Note3. The drawings on this page show the unit with horizontal-right-type cable carrier (RH).

Note4. For models with a 3,000mm or longer stroke, a roller is installed to prevent the cable carrier from sagging.

Note5. Protrusion is the distance the cable carrier extends from the edge of the unit.

Effective stroke	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000
L	380	480	580	680	780	880	980	1080	1180	1280	1380	1480	1580	1680	1780	1880	1980	2080	2180	2280	2380	2480	2580	2680	2780	2880	2980	3080	3180	3280	3380	3480	3580	3680	3780	3880	3980	4080	4180	4280
A	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
B	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80	82	84	86
C	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000	4100
Weight (kg)	5.8	6.5	7.3	8.0	8.7	9.4	10.1	10.9	11.6	12.3	13.0	13.7	14.5	15.2	15.9	16.6	17.3	18.1	18.8	19.5	20.2	20.9	21.7	22.4	23.1	23.8	24.5	25.3	26.0	26.7	27.4	28.1	28.9	29.6	30.3	31.0	31.7	32.5	33.2	33.9

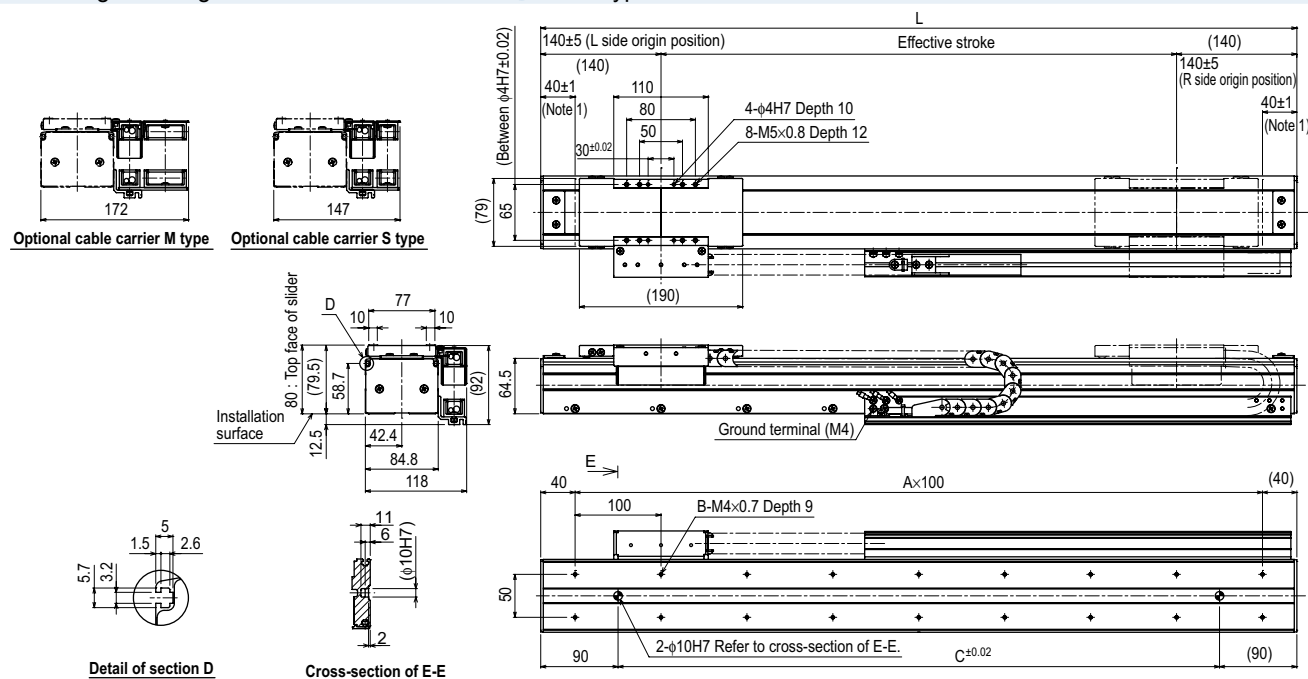
MF7 single carriage horizontal mount model **FRH** Flat type

Note1. Distance from both ends to the mechanical stopper.

Note2. The origin is set on the L side at the time of shipment. It can be changed to the R side by parameter setting.

Note3. The drawings on this page show the unit with horizontal-right-type cable carrier (RH).


Effective stroke	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
L	380	480	580	680	780	880	980	1080	1180	1280	1380	1480	1580	1680	1780	1880	1980	2080	2180	2280
A	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
B	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46
C	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100
Weight (kg)	5.8	6.5	7.3	8	8.7	9.4	10.1	10.9	11.6	12.3	13	13.7	14.5	15.2	15.9	16.6	17.3	18.1	18.8	19.5



APPLICATION	
LCMT100	Linear conveyor modules
TRANSERVO	Compact single-axis robots
FLIP-X	Single-axis robots
PHASER	Linear motor single-axis robots
XY-X	Cartesian robots
YK-X	SCARA robots
YP-X	Pick & place robots
CLEAN	
CONTROLLER	
INFORMATION	
MF type	
MR type	

MF15/MF15D

● Can be used for wall-mount



Ordering method

Single carriage model

MF15						TSP				
Model MF15: Incremental MF15A: Semi-absolute ^{Note 1}	Cable carrier entry location RH: Horizontal, right LH: Horizontal, left RW: Wall mount, right LW: Wall mount, left	Optional cable carrier for users ^{Note 2} No entry: None S: S type M: M type L: L type	Origin position change Horizontal No entry: L side (Standard) Z: R side Wall No entry: R side (Standard) Z: L side	Grease type No entry: Standard GC: Clean	Stroke Horizontal 100 to 4000 (100mm pitch) Wall 100 to 2000 (100mm pitch)	Cable length ^{Note 3} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable) ^{Note 4}	Positioner ^{Note 5} TS-P	Driver: Power-supply voltage/ Power capacity 110: 100V/200W 210: 200V/200W	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ GW: No I/O board ^{Note 6}
						SR1-P	10			
						Controller	Driver: Power capacity 10: 200W	Usable for CE No entry: Standard E: CE marking		I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS
						RDV-P	2	10	RBR1	
						Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 10: 200W or less		Regenerative unit

Double carriage model

MF15D						RCX221			
Model MF15D: Incremental MF15AD: Semi-absolute ^{Note 1}	Installing direction H: Horizontal installation W: Wall mount installation	Optional cable carrier for users ^{Note 2} No entry: None S: S type M: M type L: L type	Grease type No entry: Standard GC: Clean	Stroke Horizontal: 100 to 3800 (100mm pitch) 100 to 1800 (100mm pitch) Wall: 100 to 1800 (100mm pitch)	Cable length 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable) ^{Note 4}	Controller RCX221 SR1-P (2 units) TS-P (2 units) RDV-P (2 units)	Usable for CE No entry: Standard E: CE marking	I/O selection 1 N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS EN: Ethernet	I/O selection 2 No entry: None Nt: OPDIO24/16 (NPN) Pt: OPDIO24/17 (PNP) EN: Ethernet

Note 1. Semi-absolute models are supported by the SR1-P, TS-P and RCX221. For the details of the semi-absolute model, please refer to P.29. RDV-P has an incremental model only.

Note 2. For models with a 2,100mm or longer stroke, optional L type cable carriers can only be used.

Note 3. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.524 for details on robot cable.

Note 4. If a flexible cable is needed for the SR1-P, TS-P, or RDV-P, then select 3K/5K/10K. On the RCX221, the standard cable is a flexible cable, so enter 3L/5L/10L when ordering.

Note 5. These controllers can be mounted on DIN rails. See P.460 for details.

Note 6. Select this selection when using the gateway function. For details, see P.453.

Note. It is possible to provide the model without a cable carrier. To find information on wiring (cable terminals) within the cable carrier see P.532.


Specifications ^{Note}

Model	MF15	MF15D
Driving method	Steel cored linear motor with falt magnet	
Repeatability (μm)	+/-5	
Scale (μm)	Magnetic type: resolution of 1	
Maximum speed ^{Note 2} (mm/sec)	2500	
Rated thrust (N)	54	
Maximum payload ^{Note 1} (kg)	30	
Stroke (mm)	Horizontal	100 to 4000 (100mm pitch) 100 to 3800 (100mm pitch)
	Wall mount	100 to 2000 (100mm pitch) 100 to 1800 (100mm pitch)
Linear guide	4 rows of circular arc grooves × 2 rail	
Maximum cross-section outside dimensions (mm)	W100 × H80 (except the cable carrier section)	
Total length (mm)	Stroke+260 Stroke+460	
Cable length (m)	Standard: 3.5 / Option: 5,10	


Note. A vertical model (with brake) is not available with the PHASER series. Note. The basic specifications of semi-absolute model are the same as those of the incremental model.

Note 1. Payload per carrier. When the payload exceeds 15kg, please consult our sales office or sales representative.

Note 2. Table of maximum speed

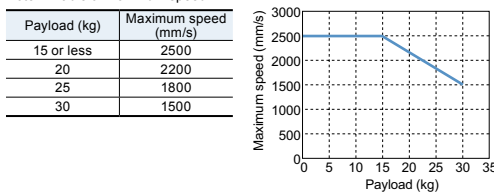

Allowable overhang ^{Note}

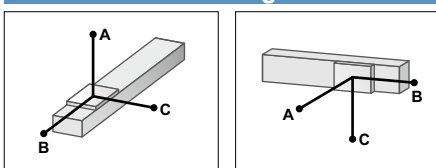

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)			
	A	B	C		A	B	C
5kg	3000	3000	915	5kg	865	1880	3060
10kg	2604	1542	481	10kg	410	905	2115
15kg	2368	1051	340	15kg	255	575	1910
20kg	1820	600	260	20kg	170	410	1780
25kg	1470	450	175	25kg	120	295	1660
30kg	1250	310	145	30kg	90	215	1440

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment


MY	MP	MR
290	291	256

(Unit: N·m)

Controller


Controller	Operating method
SR1-P10	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221 RCX240/340	
TS-P110	I/O point trace / Remote command
TS-P210	
RDV-P210-RBR1	Pulse train control

Cable carrier entry location

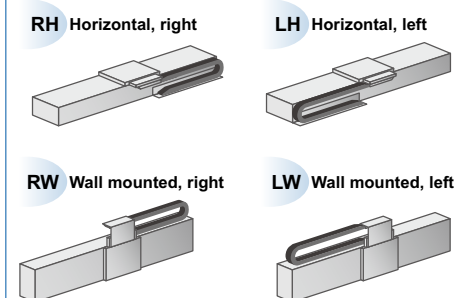


Note. Be sure to install in the direction as specified (in cable carrier take-out direction drawing and various specification drawings) individually. Installation in any other way will cause a failure. For requirement of installation in any way other than the above standard installation, please consult YAMAHA as a special arrangement will be available.


Optional cable carrier for users

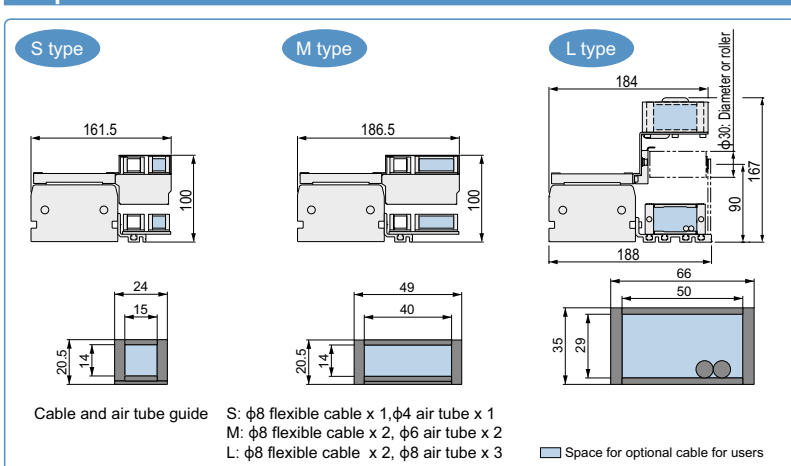


MF15 single carriage horizontal mount model RH

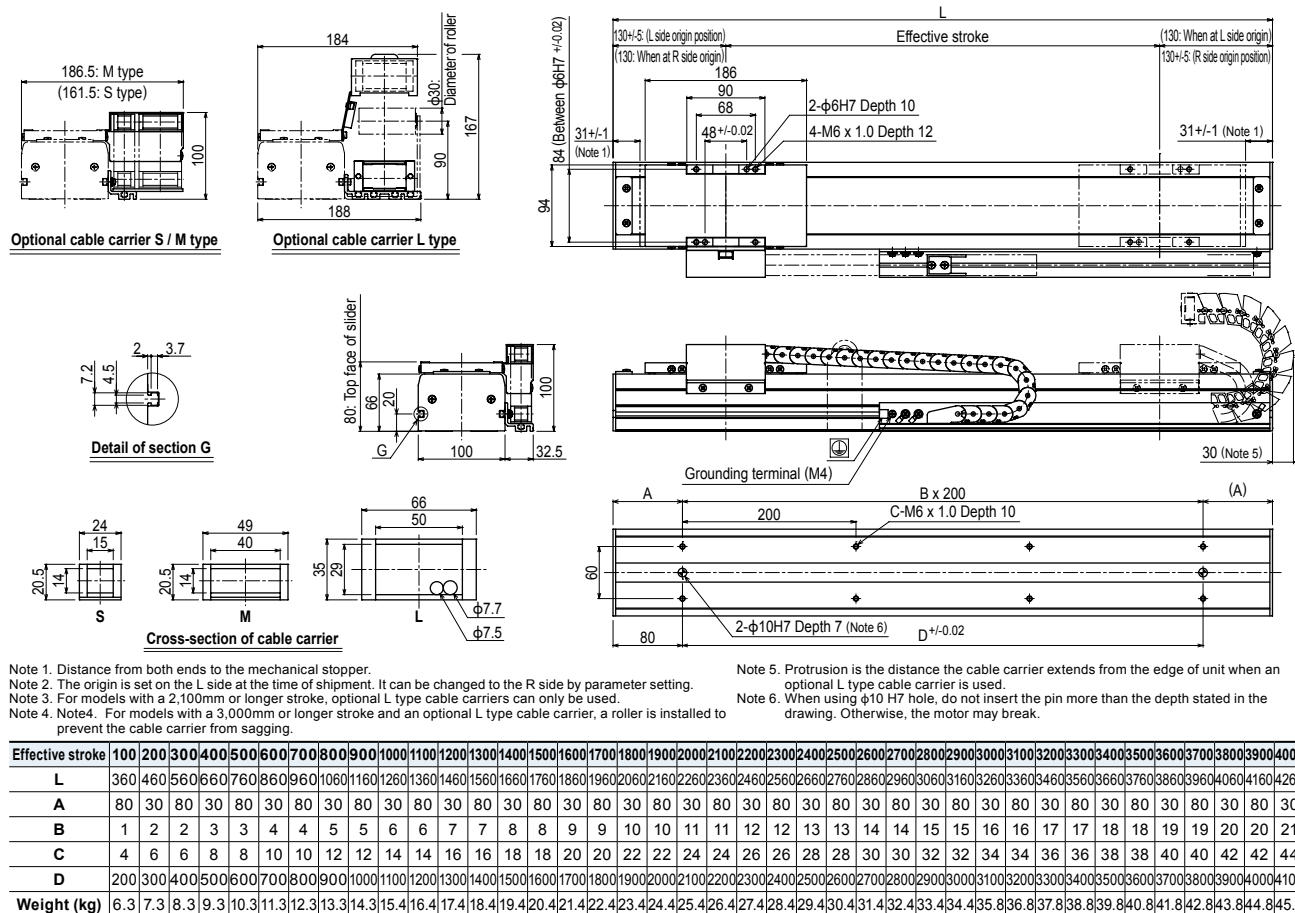

MF15D double carriage horizontal mount model H

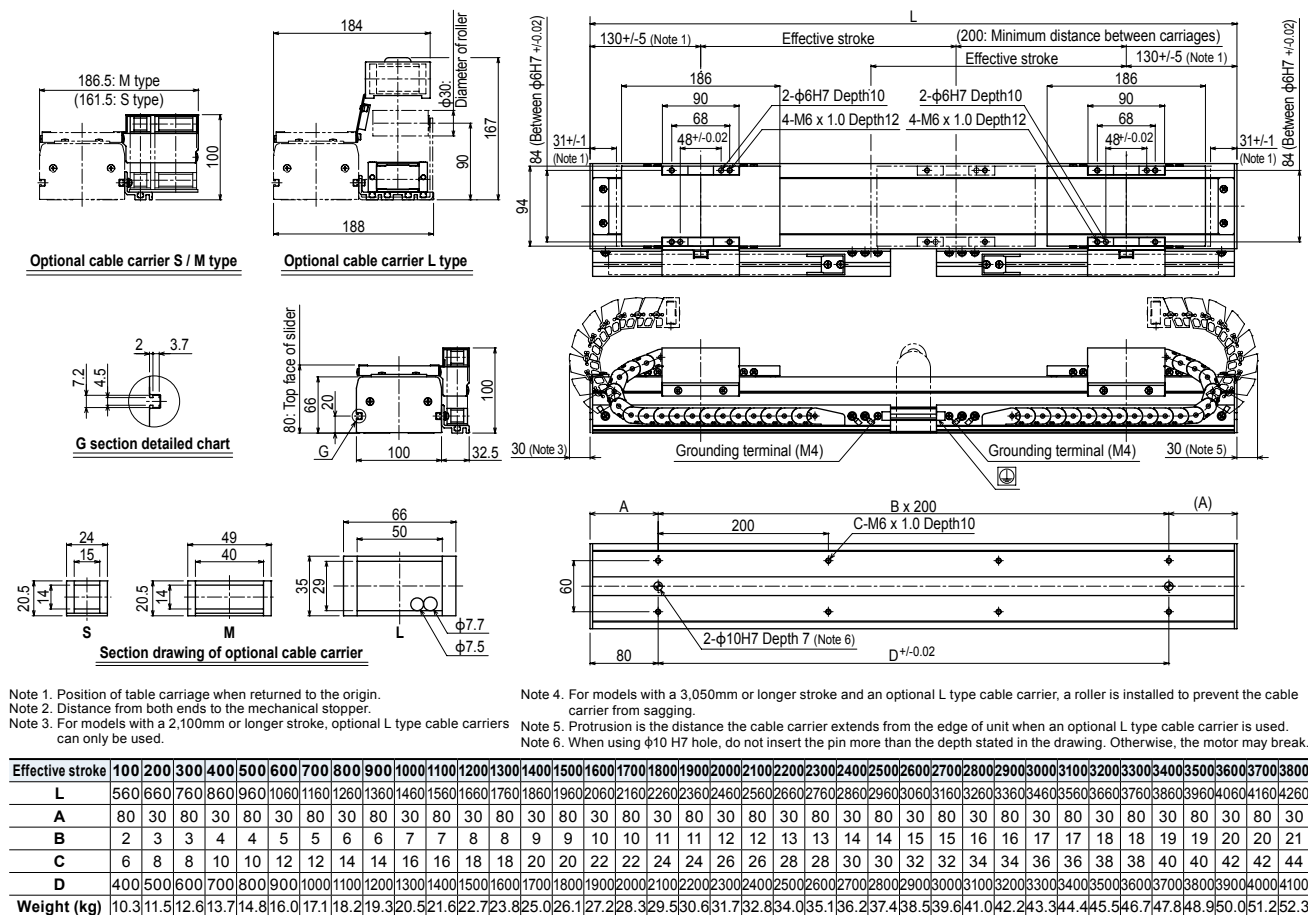

MF15/MF15D

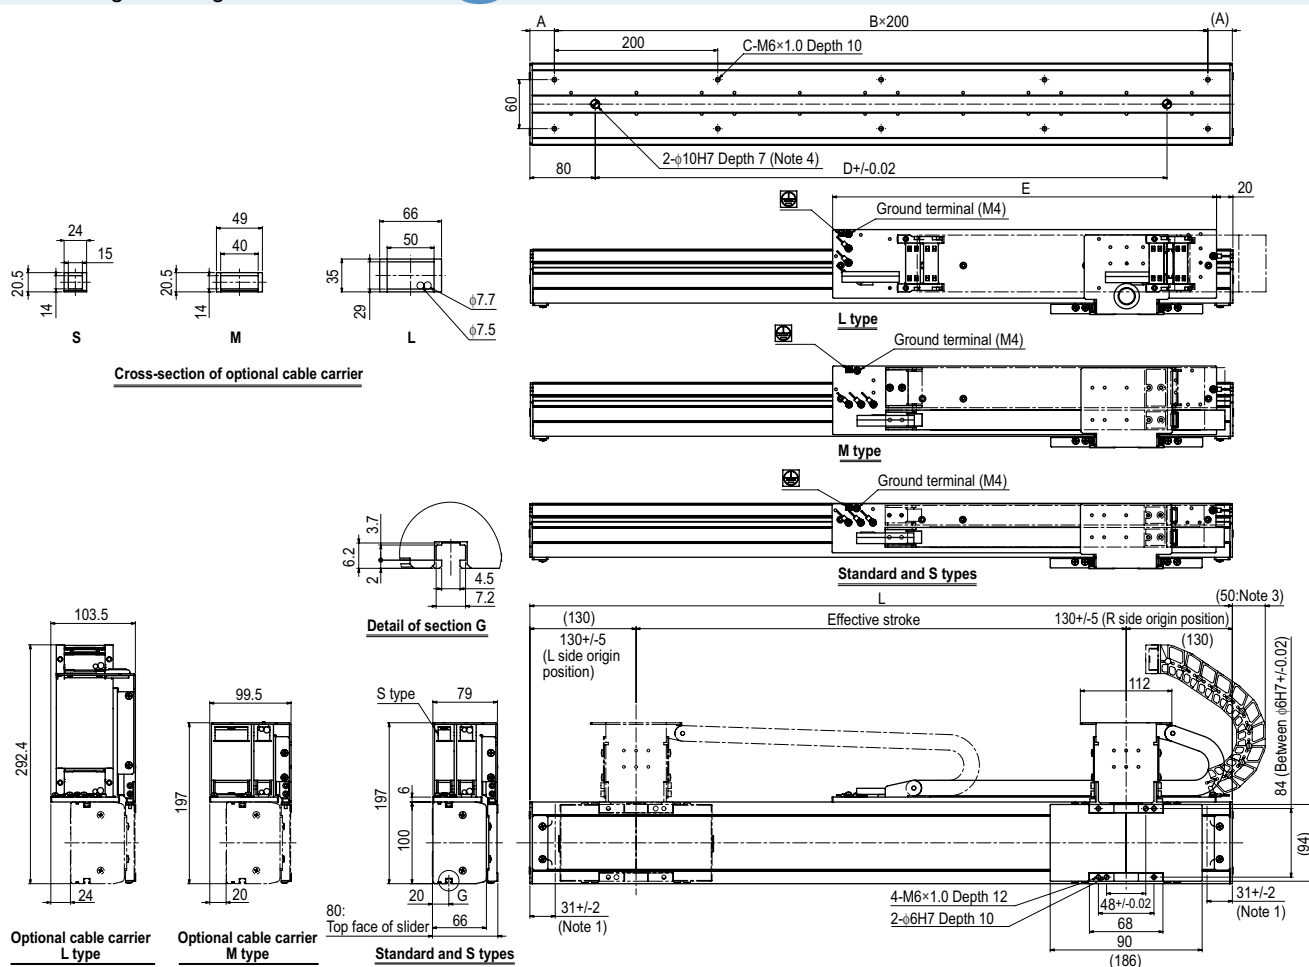MF15 single carriage wall mount model **RW**

Note 1. Distance from both ends to the mechanical stopper.

Note 2. The origin is set on the R side at the time of shipment. It can be changed to the L side by parameter setting.


Note 3. Protrusion is the distance the cable carrier extends from the edge of unit when an optional L type cable carrier is used.

Note 4. When using ø10 H7 hole, do not insert the pin more than the depth stated in the drawing. Otherwise, the motor may break.

Effective stroke	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
L	360	460	560	660	760	860	960	1060	1160	1260	1360	1460	1560	1660	1760	1860	1960	2060	2160	2260
A	80	30	80	30	80	30	80	30	80	30	80	30	80	30	80	30	80	30	80	30
B	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11
C	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24
D	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100
E	220	270	320	370	420	470	520	570	620	670	720	770	820	870	920	970	1020	1070	1120	1170
Weight (kg)	6.3	7.3	8.3	9.3	10.3	11.3	12.3	13.3	14.3	15.4	16.4	17.4	18.4	19.4	20.4	21.4	22.4	23.4	24.4	25.4

MF15D double carriage wall mount model

W

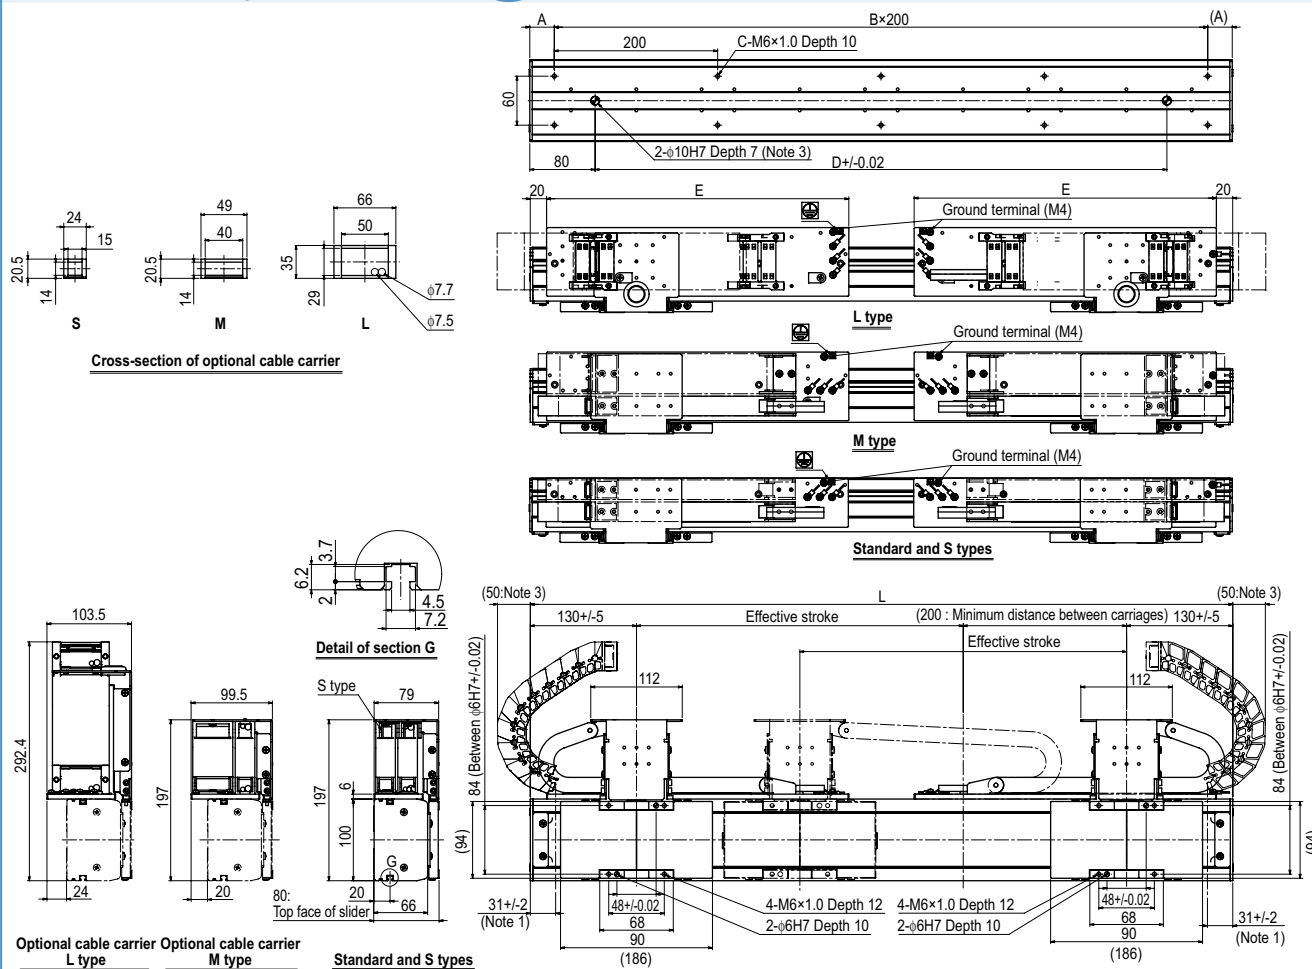

Note 1. Distance from both ends to the mechanical stopper.

Note 2. Protrusion is the distance the cable carrier extends from the edge of unit when an optional L type cable carrier is used.

Note 3. When using φ10 H7 hole, do not insert the pin more than the depth stated in the drawing. Otherwise, the motor may break.

Effective stroke	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800
L	560	660	760	860	960	1060	1160	1260	1360	1460	1560	1660	1760	1860	1960	2060	2160	2260
A	80	30	80	30	80	30	80	30	80	30	80	30	80	30	80	30	80	30
B	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11
C	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24
D	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100
E	220	270	320	370	420	470	520	570	620	670	720	770	820	870	920	970	1020	1070
Weight (kg)	10.3	11.5	12.6	13.7	14.8	16.0	17.1	18.2	19.3	20.5	21.6	22.7	23.8	25.0	26.1	27.2	28.3	29.5

MF20/MF20D

● Can be used for wall-mount



Ordering method

Single carriage model

MF20						TSP			
Model MF20: Incremental MF20A: Semi-absolute ^{Note 1}	Cable carrier entry location RH: Horizontal, right LH: Horizontal, left RW: Wall mount, right LW: Wall mount, left	Optional cable carrier for users ^{Note 2} No entry: None S: S type M: M type L: L type	Origin position change Horizontal No entry: L side (Standard) S: R side Wall No entry: R side (Standard) Z: L side	Grease type No entry: Standard GC: Clean	Stroke 150 to 4050 (100mm pitch)	Cable length ^{Note 3} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable) ^{Note 4}	Positioner ^{Note 5} TS-P	Driver: Power-supply voltage / Power capacity 110: 100V/200W 210: 200V/200W	R Regenerative unit R: With RGT No entry: None L: With LCD
						SR1-P Controller	10 Driver: Power capacity 10: 200W	Usable for CE No entry: Standard E: CE marking	R Regenerative unit R: With RGT No entry: None
						RDV-P Driver	2 Power-supply voltage 2: AC200V	10 Driver: Power capacity 10: 200W or less	RBR1 Regenerative unit
						I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ GW: No I/O board ^{Note 6}			
						I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS			

Double carriage model

MF20D				RCX221			
Model MF20D: Incremental MF20AD: Semi-absolute ^{Note 1}	Installing direction H: Horizontal installation W: Wall mount installation	Optional cable carrier for users ^{Note 2} No entry: None S: S type M: M type L: L type	Grease type No entry: Standard GC: Clean	Stroke 150 to 3850 (100mm pitch)	Cable length 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable) ^{Note 4}	Controller RCX221 SR1-P (2 units) TS-P (2 units) RDV-P (2 units)	Usable for CE No entry: Standard E: CE marking
				R Regenerative unit R: RG2 (RCX221)			
				I/O selection 1 N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS EN: Ethernet			
				I/O selection 2 No entry: None NT: OP.DIO24/16 (NPN) Pt: OP.DIO24/17 (PNP) EN: Ethernet			

Note 1. Semi-absolute models are supported by the SR1-P, TS-P and RCX221. For the details of the semi-absolute model, please refer to P.29. RDV-P has an incremental model only.

Note 2. For models with a 2,050mm or longer stroke, optional L type cable carriers can only be used.

Note 3. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.524 for details on robot cable.

Note 4. If a flexible cable is needed for the SR1-P, TS-P, or RDV-P, then select 3K/5K/10K. On the RCX221, the standard cable is a flexible cable, so enter 3L/5L/10L when ordering.

Note 5. These controllers can be mounted on DIN rails. See P.460 for details.

Note 6. Select this selection when using the gateway function. For details, see P.453.

Note. It is possible to provide the model without a cable carrier. To find information on wiring (cable terminals) within the cable carrier see P.532.

Specifications ^{Note}

Model	MF20	MF20D
Driving method	Steel cored linear motor with fail magnet	
Repeatability (μm)	+/-5	
Scale (μm)	Magnetic type: resolution of 1	
Maximum speed ^{Note 2} (mm/sec)	2500	
Rated thrust (N)	86	
Maximum payload ^{Note 1} (kg)	40	
Stroke (mm)	150 to 4050 (100mm pitch)	150 to 3850 (100mm pitch)
Linear guide	4 rows of circular arc grooves x 2 rail W150 x H80	
Maximum cross-section outside dimensions (mm)	(except the cable carrier section)	
Total length (mm)	Stroke+260	Stroke+460
Cable length (m)	Standard: 3.5 / Option: 5.10	


Note. A vertical model (with brake) is not available with the PHASER series.

Note. The basic specifications of semi-absolute model are the same as those of the incremental model.


Note 1. Payload per carrier. When the payload exceeds 20kg, please consult our sales office or sales representative.

Note 2. Table of maximum speed

Payload (kg)	Maximum speed (mm/s)
20 or less	2500
25	2300
30	2000
35	1800
40	1500



Allowable overhang ^{Note}

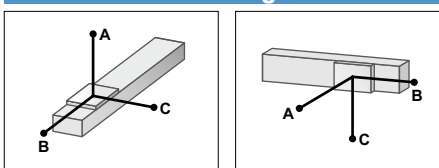

Horizontal installation (Unit: mm)

	A	B	C
10kg	3156	1747	1196
15kg	2811	1176	883
20kg	2679	890	717
25kg	2190	720	505
30kg	1830	605	370
35kg	1580	525	275
40kg	1390	465	225

Wall installation (Unit: mm)

	A	B	C
10kg	1220	1320	2540
15kg	870	850	2200
20kg	670	610	2030
25kg	485	400	1280
30kg	350	325	1050
35kg	265	270	890
40kg	235	230	765

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.


Static loading moment

(Unit: N·m)		
MY	MP	MR
373	373	328

Controller


Controller	Operating method
SR1-P10-R	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221-R RCX240/340	
TS-P110-R	I/O point trace / Remote command
TS-P210-R	
RDV-P210-RBR1	Pulse train control

Cable carrier entry location

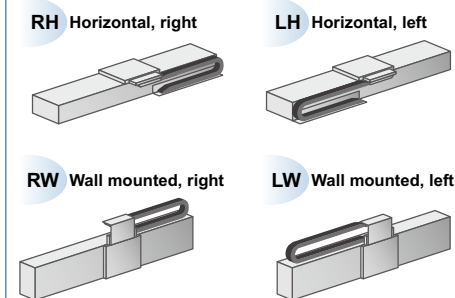

Note. Be sure to install in the direction as specified (in cable carrier take-out direction drawing and various specification drawings) individually. Installation in any other way will cause a failure. For requirement of installation in any way other than the above standard installation, please consult YAMAHA as a special arrangement will be available.

Optional cable carrier for users

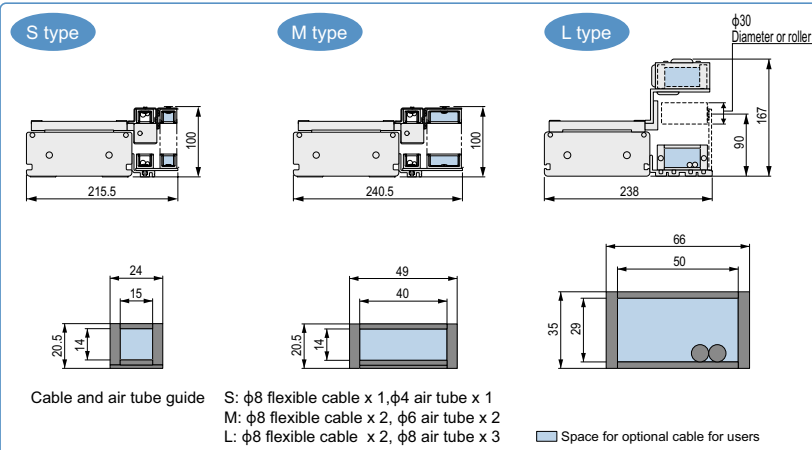


Cable and air tube guide

S: φ8 flexible cable x 1, φ4 air tube x 1
M: φ8 flexible cable x 2, φ6 air tube x 2
L: φ8 flexible cable x 2, φ8 air tube x 3

Space for optional cable for users

MF20 single carriage horizontal mount model RH

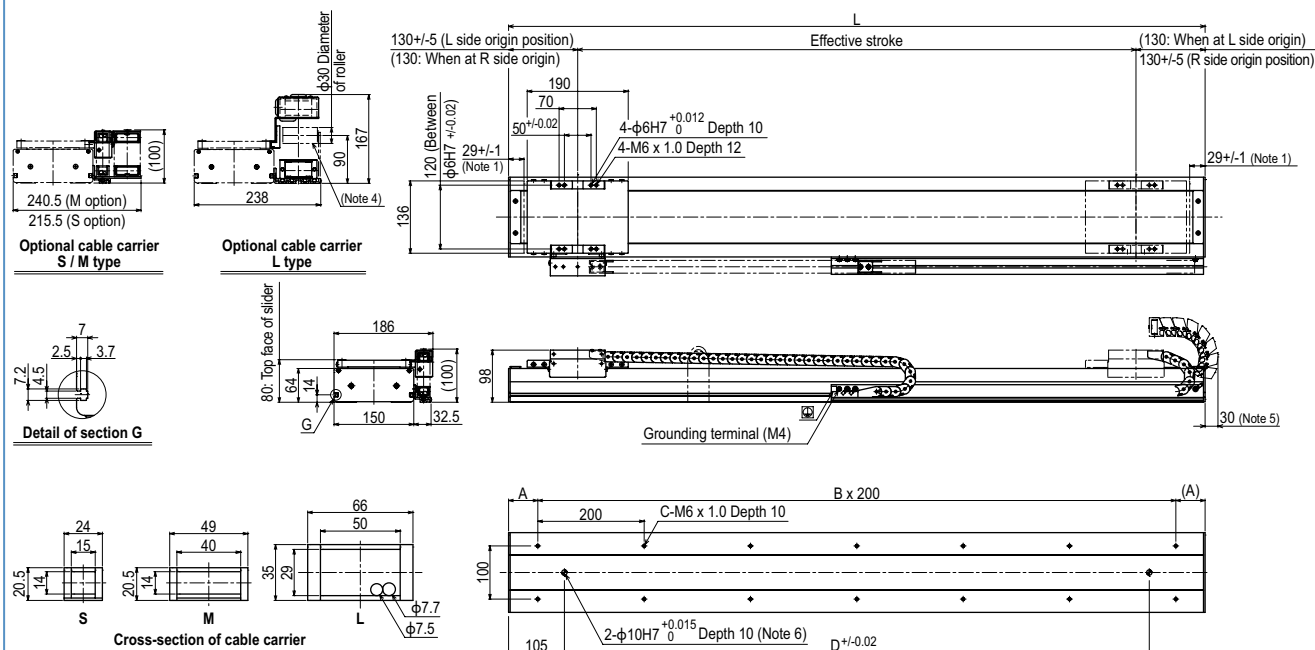

Note 1. Distance from both ends to the mechanical stopper.

Note 2. The origin is set on the L side at the time of shipment. It can be changed to the R side by parameter setting.

Note 3. For models with a 2,050mm or longer stroke, optional L type cable carriers can only be used.


Note 4. For models with a 3,050mm or longer stroke and an optional L type cable carrier, a roller is installed to prevent the cable carrier from sagging.

Note 5. Protrusion is the distance the cable carrier extends from the edge of unit when an optional L type cable carrier is used.

Note 6. When using $\phi 10$ H7 hole, do not insert the pin more than the depth stated in the drawing. Otherwise, the motor may break.

Effective stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050	3150	3250	3350	3450	3550	3650	3750	3850	3950	4050		
L	410	510	610	710	810	910	1010	1110	1210	1310	1410	1510	1610	1710	1810	1910	2010	2110	2210	2310	2410	2510	2610	2710	2810	2910	3010	3110	3210	3310	3410	3510	3610	3710	3810	3910	4010	4110	4210	4310		
A	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55
B	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15	16	16	17	17	18	18	19	19	20	20	21		
C	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44		
D	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000	4100		
Weight (kg)	8.4	10.1	11.7	13.3	15.0	16.6	18.2	19.8	21.5	23.1	24.7	26.4	28.0	29.6	31.3	32.9	34.5	36.1	37.8	39.4	41.0	42.7	44.4	46.0	47.6	49.2	50.8	52.4	54.1	55.7	57.3	58.9	60.6	62.2	63.9	65.5	67.1	68.7	70.4			

MF20 single carriage wall mount model RW

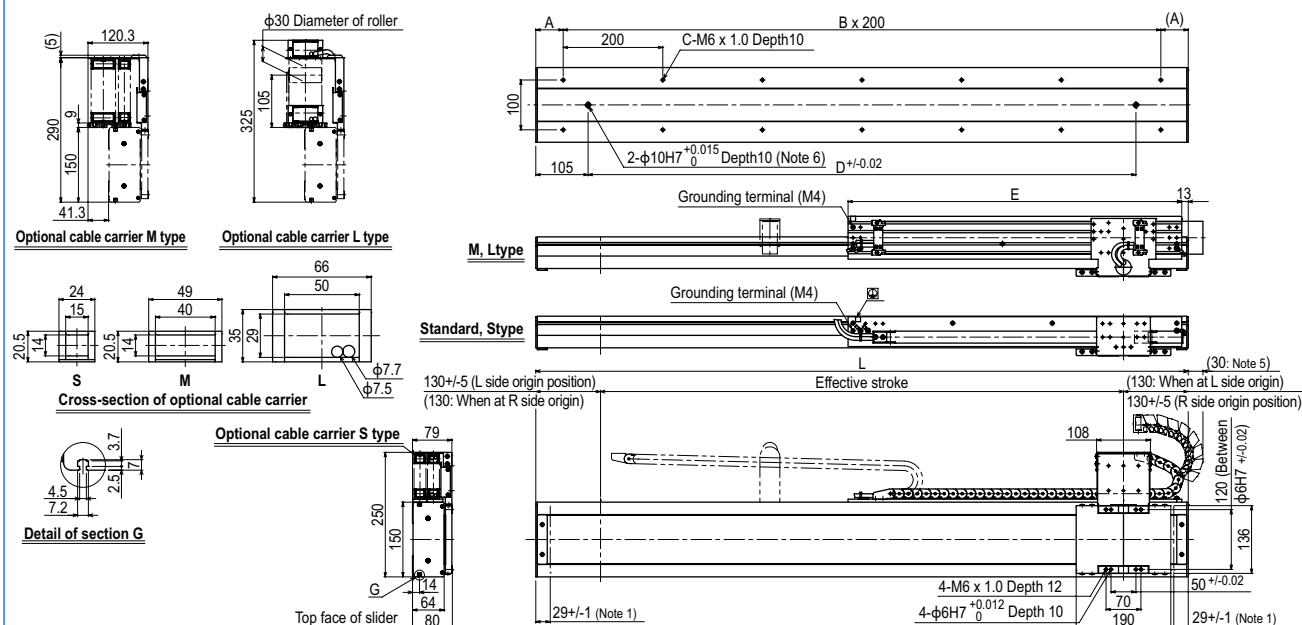

Note 1. Distance from both ends to the mechanical stopper.

Note 2. The origin is set on the R side at the time of shipment. It can be changed to the L side by parameter setting.

Note 3. For models with a 2,050mm or longer stroke, optional L type cable carriers can only be used.


Note 4. For models with a 3,050mm or longer stroke and an optional L type cable carrier, a roller is installed to prevent the cable carrier from sagging.

Note 5. Protrusion is the distance the cable carrier extends from the edge of unit when an optional L type cable carrier is used.

Note 6. When using $\phi 10$ H7 hole, do not insert the pin more than the depth stated in the drawing. Otherwise, the motor may break.

Effective stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050	3150	3250	3350	3450	3550	3650	3750	3850	3950	4050
L	410	510	610	710	810	910	1010	1110	1210	1310	1410	1510	1610	1710	1810	1910	2010	2110	2210	2310	2410	2510	2610	2710	2810	2910	3010	3110	3210	3310	3410	3510	3610	3710	3810	3910	4010	4110	4210	4310
A	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55
B	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15	16	16	17	17	18	18	19	19	20	20	21
C	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44
D	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000	4100
E	220	270	320	370	420	470	520	570	620	670	720	770	820	870	920	970	1020	1070	1120	1170	1220	1270	1320	1370	1420	1470	1520	1570	1620	1670	1720	1770	1820	1870	1920	1970	2020	2070	2120	2170
Weight (kg)	8.4	10.1	11.7	13.3	15.0	16.6	18.2	19.8	21.5	23.1	24.7	26.4	28.0	29.6	31.3	32.9	34.5	36.1	37.8	39.4	41.0	42.7	44.4	46.0	47.6	49.2	50.8	52.4	54.1	55.7	57.3	58.9	60.6	62.2	63.9	65.5	67.1	68.7	70.4	


MF20/MF20D

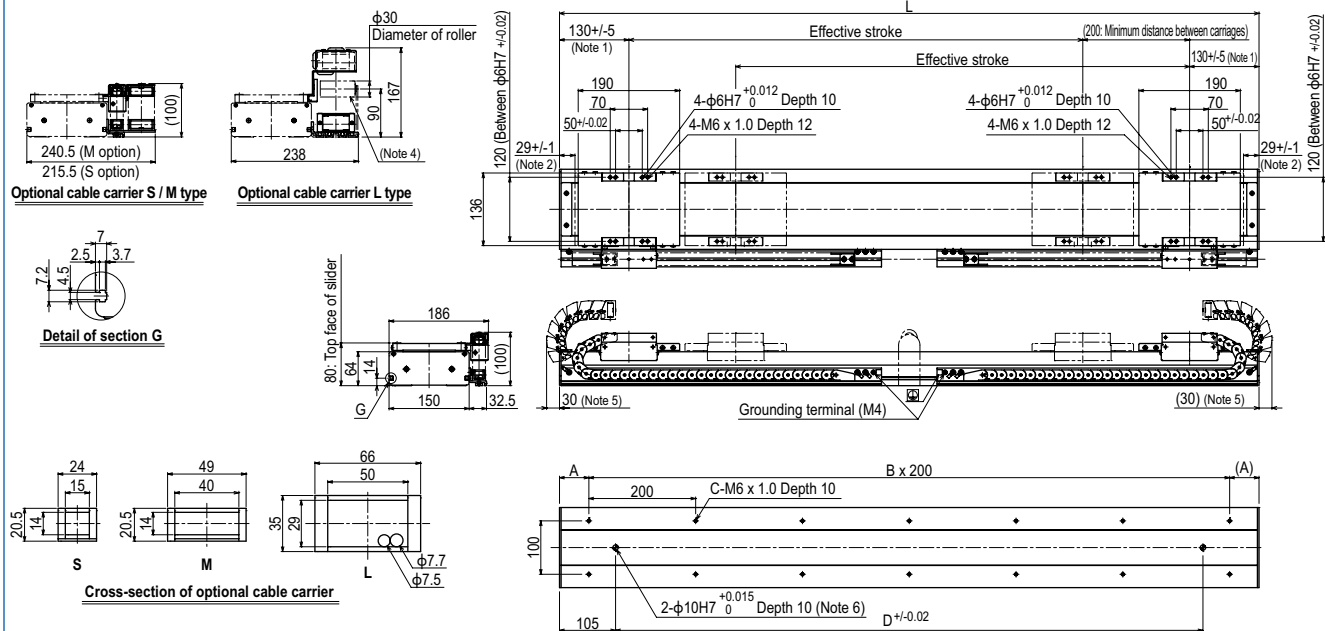MF20D double carriage horizontal mount model **H**

Note 1. Position of table carriage when returned to the origin.
Note 2. Distance from both ends to the mechanical stopper.

Note 3. For models with a 2,050mm or longer stroke, optional L type cable carriers can only be used.
Note 4. For models with a 3,050mm or longer stroke and an optional L type cable carrier, a roller is installed to prevent the cable carrier from sagging.
Note 5. Protrusion is the distance the cable carrier extends from the edge of unit when an optional L type cable carrier is used.
Note 6. When using $\phi 10$ H7 hole, do not insert the pin more than the depth stated in the drawing. Otherwise, the motor may break.

Effective stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050	3150	3250	3350	3450	3550	3650	3750	3850
L	610	710	810	910	1010	1110	1210	1310	1410	1510	1610	1710	1810	1910	2010	2110	2210	2310	2410	2510	2610	2710	2810	2910	3010	3110	3210	3310	3410	3510	3610	3710	3810	3910	4010	4110	4210	4310
A	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55
B	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15	16	16	17	17	18	18	19	19	20	20	21
C	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44
D	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000	4100
Weight (kg)	14.9	16.6	18.3	20.0	21.7	23.5	25.2	26.9	28.6	30.3	32.0	33.7	35.4	37.2	38.9	40.6	42.4	44.1	45.9	47.6	49.4	51.1	52.9	54.6	56.4	58.1	59.9	61.6	63.4	65.1	66.9	68.6	70.4	72.1	73.9	75.6	77.4	

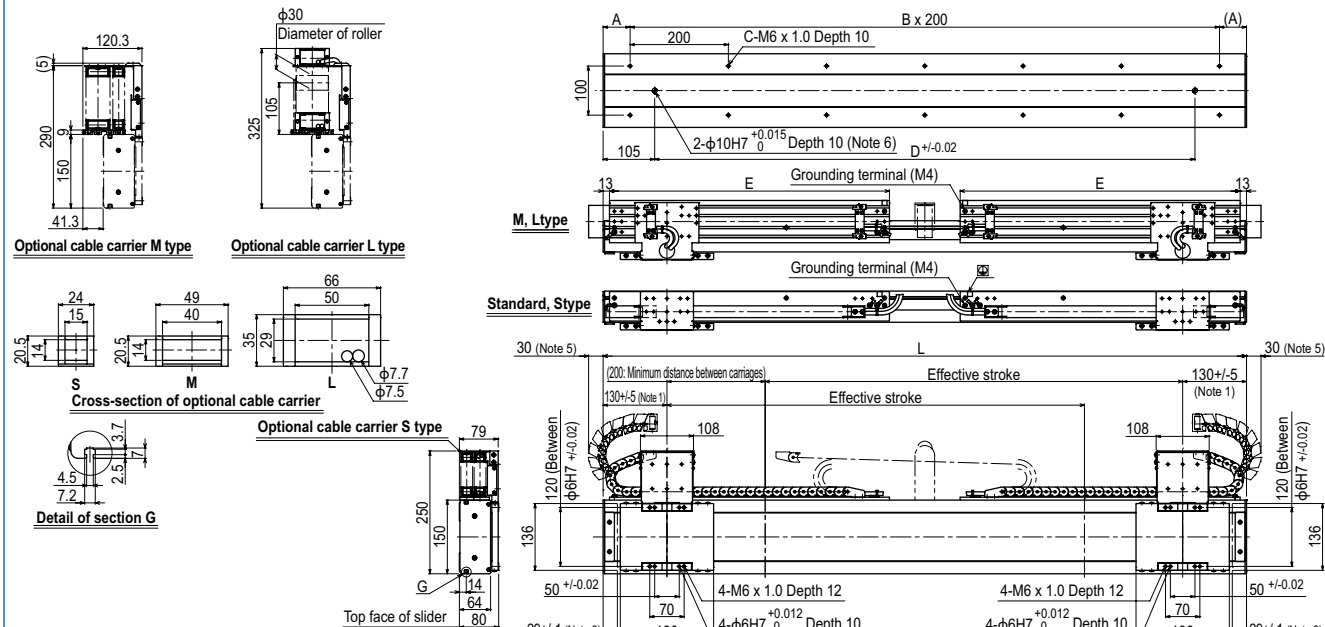MF20D double carriage wall mount model **W**

Note 1. Position of table carriage when returned to the origin.
Note 2. Distance from both ends to the mechanical stopper.
Note 3. For models with a 2,050mm or longer stroke, optional L type cable carriers can only be used.

Note 4. For models with a 3,050mm or longer stroke and an optional L type cable carrier, a roller is installed to prevent the cable carrier from sagging.
Note 5. Protrusion is the distance the cable carrier extends from the edge of unit when an optional L type cable carrier is used.
Note 6. When using $\phi 10$ H7 hole, do not insert the pin more than the depth stated in the drawing. Otherwise, the motor may break.

Effective stroke	150	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650	2750	2850	2950	3050	3150	3250	3350	3450	3550	3650	3750	3850
L	610	710	810	910	1010	1110	1210	1310	1410	1510	1610	1710	1810	1910	2010	2110	2210	2310	2410	2510	2610	2710	2810	2910	3010	3110	3210	3310	3410	3510	3610	3710	3810	3910	4010	4110	4210	4310
A	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55
B	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15	16	16	17	17	18	18	19	19	20	20	21
C	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44
D	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000	4100
E	220	270	320	370	420	470	520	570	620	670	720	770	820	870	920	970	1020	1070	1120	1170	1220	1270	1320	1370	1420	1470	1520	1570	1620	1670	1720	1770	1820	1870	1920	1970	2020	2070
Weight (kg)	14.9	16.6	18.3	20.0	21.7	23.5	25.2	26.9	28.6	30.3	32.0	33.7	35.4	37.2	38.9	40.6	42.4	44.1	45.9	47.6	49.4	51.1	52.9	54.6	56.4	58.1	59.9	61.6	63.4	65.1	66.9	68.6	70.4	72.1	73.9	75.6	77.4	

MF30/MF30D

Can be used for wall-mount



Ordering method

Single carriage model

MF30						TSP				220				R				I/O selection			
Model						Positioner				Driver: Power-supply voltage / Power capacity				Regenerative unit				N: NPN			
MF30: Incremental						TS-P				220: 200V/400 to 600W				R: With RGT				P: PNP			
MF30A: Semi-absolute														No entry: Standard				CC: CC-Link			
Cable carrier entry location														R: With RGT				DN: DeviceNet™			
Optional cable carrier for users														No entry: None				EP: EtherNet/IP™			
Origin position change														L: With LCD				GW: No I/O board			
Grease type																					
Stroke																					
Cable length																					

Double carriage model

MF30D						RCX221HP				R				I/O selection 1				I/O selection 2			
Model						Controller				Regenerative unit				N: NPN				No entry: None			
MF30D: Incremental						RCX221HP				R: RG2 (RCX221HP)				P: PNP				Nt: OP.DIO24/16 (NPN)			
MF30AD: Semi-absolute						SR1-P (2 units)				No entry: Standard				CC: CC-Link				Pt: OP.DIO24/17 (PNP)			
Installing direction						TS-P (2 units)				E: CE marking				DN: DeviceNet™				EN: Ethernet			
Optional cable carrier for users						RDV-P (2 units)								PB: PROFIBUS							
Grease type																					
Stroke																					
Cable length																					

Note 1. Semi-absolute models are supported by the SR1-P, TS-P and RCX221. For the details of the semi-absolute model, please refer to P.29. RDV-P has an incremental model only.

Note 2. For models with a 2,100mm or longer stroke, optional L type cable carriers can only be used.

Note 3. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.524 for details on robot cable.

Note 4. If a flexible cable is needed for the SR1-P, TS-P, or RDV-P, then select 3K/5K/10K. On the RCX221HP, the standard cable is a flexible cable, so enter 3L/5L/10L when ordering.

Note 5. These controllers can be mounted on DIN rails. See P.460 for details.

Note 6. Select this selection when using the gateway function. For details, see P.453.

Note 7. It is possible to provide the model without a cable carrier. To find information on wiring (cable terminals) within the cable carrier see P.532.

Specifications


Model	MF30	MF30D
Driving method	Steel cored linear motor with falt magnet	
Repeatability (μm)	+/-5	
Scale (μm)	Magnetic type: resolution of 1	
Maximum speed ^{Note 2} (mm/sec)	2500	
Rated thrust (N)	125	
Maximum payload ^{Note 1} (kg)	60	
Stroke (mm)	100 to 4000 (100mm pitch)	150 to 3750 (100mm pitch)
Linear guide	4 rows of circular arc grooves x 2 rail	
Maximum cross-section outside dimensions (mm)	W150 x H80 (except the cable carrier section)	
Total length (mm)	Stroke+310	Stroke+560
Cable length (m)	Standard: 3.5 / Option: 5.10	

Note. A vertical model (with brake) is not available with the PHASER series.

Note. The basic specifications of semi-absolute model are the same as those of the incremental model.

Note 1. Payload per carrier. When the payload exceeds 30kg, please consult our sales office or sales representative.

Note 2. Table of maximum speed

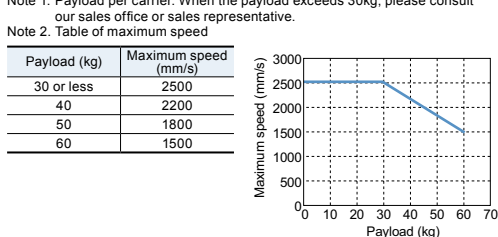

Allowable overhang

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)			
	A	B	C		A	B	C
10kg	3364	2485	1284	10kg	1290	1320	2730
20kg	2298	1265	694	20kg	650	610	1750
30kg	2060	859	507	30kg	430	360	1460
40kg	1570	600	310	40kg	205	230	610
50kg	1265	400	180	50kg	145	175	470
60kg	1070	350	135	60kg	105	140	380

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.


Static loading moment

(Unit: N-m)			
MY	MP	MR	
373	373	328	


Controller

Controller	Operating method
SR1-P20-R	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221HP-R	
RCX240/340	
TS-P220-R	I/O point trace / Remote command
RDV-P220-RBR1	Pulse train control

Cable carrier entry location

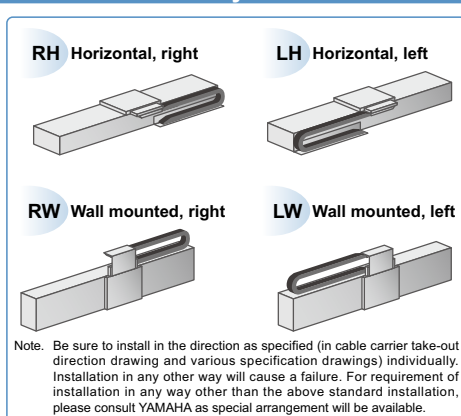

Optional cable carrier for users

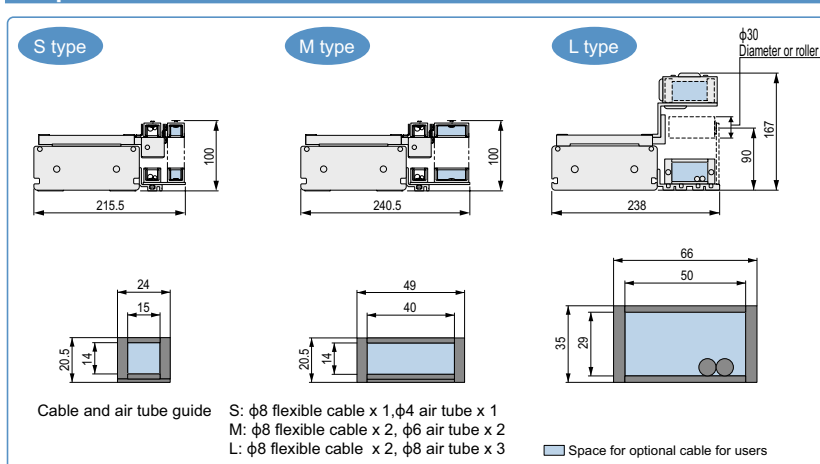

Controller

SR1-P ▶ 478


RCX221 ▶ 488

TS-P ▶ 452


RDV-P ▶ 469

MF30/MF30D

MF30 single carriage horizontal mount model RH

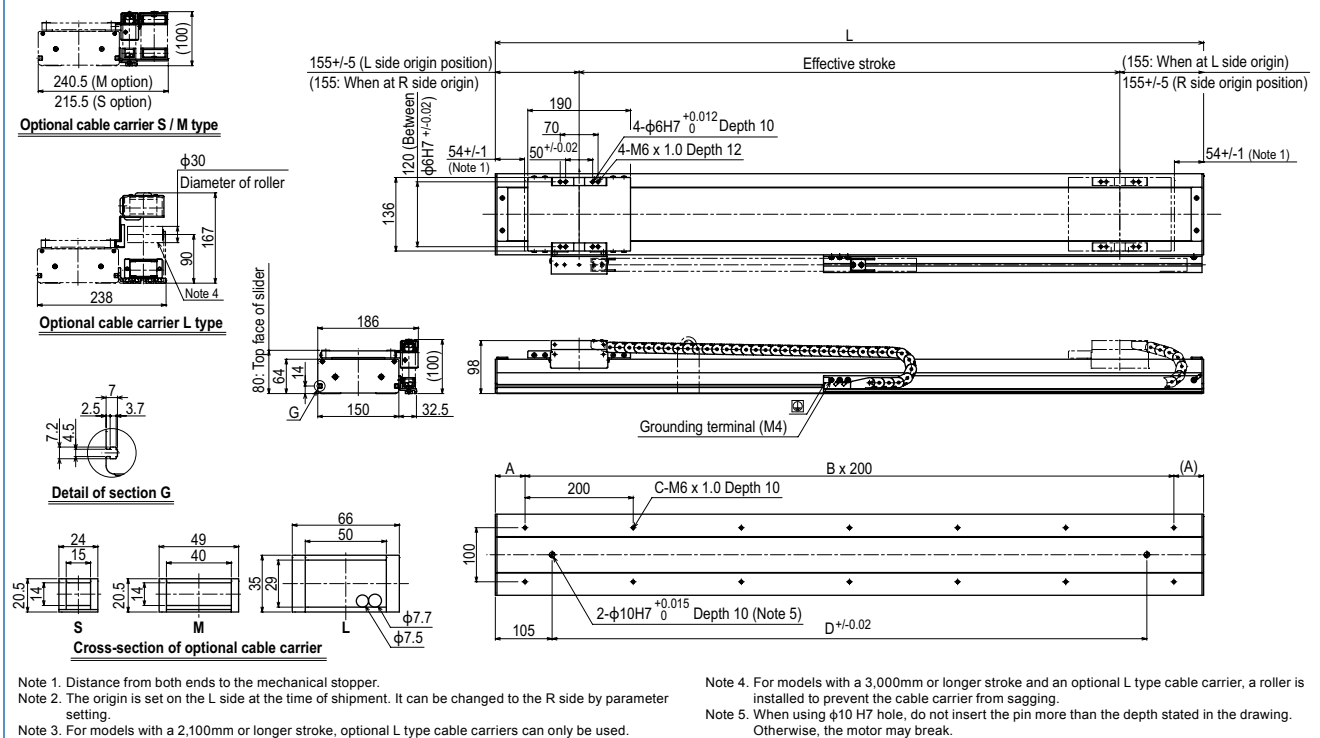

MF30 single carriage wall mount model RW

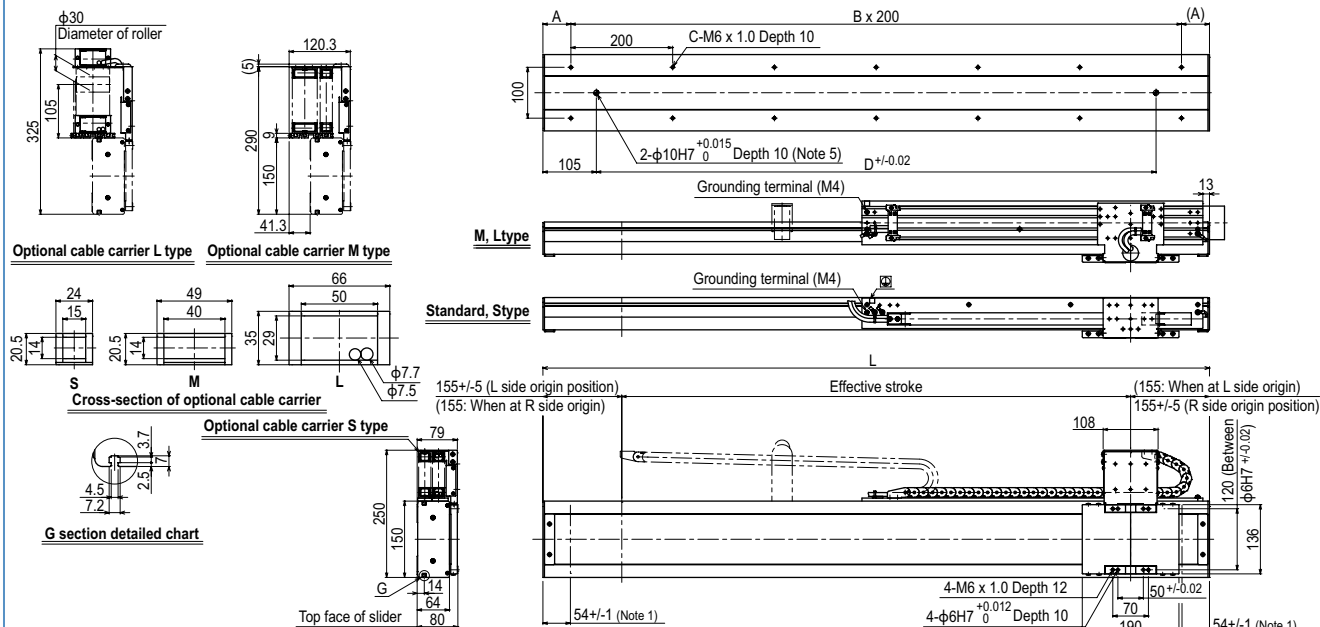

Note 1. Distance from both ends to the mechanical stopper.

Note 2. The origin is set on the R side at the time of shipment. It can be changed to the L side by parameter setting.

Note 3. For models with a 2,100mm or longer stroke, optional L type cable carriers can only be used.

Note 4. For models with a 3,000mm or longer stroke and an optional L type cable carrier, a roller is installed to prevent the cable carrier from sagging.

Note 5. When using φ10 H7 hole, do not insert the pin more than the depth stated in the drawing. Otherwise, the motor may break.

Effective stroke	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000
L	410	510	610	710	810	910	1010	1110	1210	1310	1410	1510	1610	1710	1810	1910	2010	2110	2210	2310	2410	2510	2610	2710	2810	2910	3010	3110	3210	3310	3410	3510	3610	3710	3810	3910	4010	4110	4210	4310
A	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55	105	55
B	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15	16	16	17	17	18	18	19	19	20	20	21
C	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32	32	34	34	36	36	38	38	40	40	42	42	44
D	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000	4100
E	220	270	320	370	420	470	520	570	620	670	720	770	820	870	920	970	1020	1070	1120	1170	1220	1270	1320	1370	1420	1470	1520	1570	1620	1670	1720	1770	1820	1870	1920	1970	2020	2070	2120	2170
Weight (kg)	9.0	10.7	12.3	13.9	15.6	17.2	18.8	20.4	22.1	23.7	25.3	27.0	28.6	30.2	31.9	33.5	35.1	36.7	38.4	40.0	41.6	43.3	44.9	46.5	48.2	49.8	51.4	53.0	54.7	56.3	57.9	59.6	61.2	62.8	64.5	66.1	67.7	69.3	71.0	72.6

MF75/MF75D



Ordering method

Single carriage model

MF75						TSP				220		R			
Model MF75: Incremental MF75A: Semi-absolute ^{Note 1}	Cable carrier entry location RH: Horizontal, right LH: Horizontal, left	Origin position change No entry: L side (Standard) Z: R side	Grease type No entry: Standard GC: Clean	Stroke 1000 to 4000 (100mm pitch)	Cable length ^{Note 2} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable) ^{Note 3}	Positioner ^{Note 4} TS-P	Driver: Power-supply voltage / Power capacity 220: 200V/400 to 600W	Regenerative unit R: With RGU-2	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ GW: No I/O board ^{Note 5}					
						SR1-P	20		R						
						Controller	Driver: Power capacity 20: 400 to 600W	Usable for CE No entry: Standard E: CE marking	Regenerative unit R: With RGU-2	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS					
						RDV-P	2		25						
						Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 25: 750W or less	Regenerative unit						

Double carriage model

MF75D		H				RCX221HP		R			
Model MF75D: Incremental MF75AD: Semi-absolute ^{Note 1}	Installing direction H: Horizontal installation	Grease type No entry: Standard GC: Clean	Stroke 680 to 3680 (100mm pitch)	Cable length 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable) ^{Note 3}	Controller RCX221HP SR1-P (2 units) TS-P (2 units) RDV-P (2 units)	Usable for CE No entry: Standard E: CE marking	Regenerative unit	I/O selection 1 N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS EN: Ethernet	I/O selection 2 No entry: None Nt: OP.DIO24/16 (NPN) Pt: OP.DIO24/17 (PNP) EN: Ethernet		

Note 1. Semi-absolute models are supported by the SR1-P, TS-P and RCX221. For the details of the semi-absolute model, please refer to P.29. RDV-P has an incremental model only.

Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.524 for details on robot cable.

Note 3. If a flexible cable is needed for the SR1-P, TS-P, or RDV-P, then select 3K/5K/10K. On the RCX221HP, the standard cable is a flexible cable, so enter 3L/5L/10L when ordering.

Note 4. These controllers can be mounted on DIN rails. See P.460 for details.

Note 5. Select this selection when using the gateway function. For details, see P.453.

Note. It is possible to provide the model without a cable carrier. To find information on wiring (cable terminals) within the cable carrier see P.532.

Specifications ^{Note}

Model	MF75	MF75D
Driving method	Steel cored linear motor with falt magnet	
Repeatability (μm)	+/- 5	
Scale (μm)	Magnetic type: resolution of 1	
Maximum speed ^{Note 2} (mm/sec)	2500	
Rated thrust (N)	260	
Maximum payload ^{Note 1} (kg)	160	
Stroke (mm)	1000 to 4000 (100mm pitch)	680 to 3680 (100mm pitch)
Linear guide	4 rows of circular arc grooves x 2 rail W210xH100	
Maximum cross-section outside dimensions (mm)	(except the cable carrier section)	
Total length (mm)	Stroke+360	Stroke+680
Cable length (m)	Standard: 3.5 / Option: 5,10	


Note. A vertical model (with brake) is not available with the PHASER series.

Note. The basic specifications of semi-absolute model are the same as those of the incremental model.


Note 1. Payload per carrier. When the payload exceeds 75kg, please consult our sales office or sales representative.

Note 2. Table of maximum speed

Payload (kg)	Maximum speed (mm/s)
75 or less	2500
90	2310
100	2200
110	2090
120	2000
130	1920
140	1840
150	1770
160	1700



Allowable overhang ^{Note}




Horizontal installation (Unit: mm)

	A	B	C
20kg	3397	2841	1840
40kg	2795	1389	964
60kg	2200	530	450
80kg	1800	175	150
100kg	1500	130	110
120kg	1250	100	80
140kg	1100	80	65
160kg	950	60	50

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment



(Unit: N·m)


MY	MP	MR
830	831	730

Controller


Controller	Operating method
SR1-P20-R (RGU-2)	Programming / I/O point trace /
RCX221HP-R (RG2)	Remote command / Operation using RS-232C communication
TS-P220-R (RGU-2)	I/O point trace / Remote command
RDV-P225-RBR2	Pulse train control

Cable carrier entry location

RH Horizontal, right




LH Horizontal, left



Note. Be sure to install in the direction as specified (in cable carrier take-out direction drawing and various specification drawings) individually. Installation in any other way will cause a failure. For requirement of installation in any way other than the above standard installation, please consult YAMAHA as special arrangement will be available.

Cable carrier



Cable and air tube guide φ8 flexible cable x 2, φ6 air tube x 3

Space for optional cable for users

MR12/MR12D

● Can be used for wall-mount

Ordering method

Single carriage model

MR12							TSP			
Model	Cable carrier entry location	Optional cable carrier for users	Origin position change	Grease type	Stroke	Cable length	Positioner	Driver: Power-supply voltage Power capacity	LCD monitor	I/O selection
MR12: Incremental MR12A: Semi-absolute ^{Note 1}	RH: Horizontal, right LH: Horizontal, left RW: Wall mounted, right LW: Wall mounted, left	No entry: None S: S type M: M type	Horizontal No entry: L side (Standard) Z: R side Wall No entry: R side (Standard) Z: L side	No entry: Standard GC: Clean	50 to 1050 (100mm pitch)	^{Note 2} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable) ^{Note 3}	^{Note 4} TS-P	105: 100V/100W or less 205: 200V/100W or less	No entry: None L: With LCD	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ GW: No I/O board ^{Note 5}
SR1-P							05			
Controller	Driver: Power capacity	Usable for CE	I/O selection							
	05: 100W or less	No entry: Standard E: CE marking	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS							
RDV-P							05			
Driver	Power-supply voltage	Driver: Power capacity								
	2: AC200V	05: 100W or less								

Double carriage model

MR12D						RCX221			
Model	Installing direction	Optional cable carrier for users	Grease type	Stroke	Cable length	Controller	Usable for CE	I/O selection 1	I/O selection 2
MR12D: Incremental MR12AD: Semi-absolute	H: Horizontal installation W: Wall mounted installation	No entry: None S: S type M: M type	No entry: Standard GC: Clean	50 to 1050 (100mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	RCX221 SR1-P (2 units) TS-P (2 units) RDV-P (2 units)	No entry: Standard E: CE marking	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS EN: Ethernet	No entry: None N1: QP/DIO24/16 (NPN) P1: QP/DIO24/17 (PNP) EN: Ethernet

Note 1. Semi-absolute models are supported by the SR1-P, TS-P and RCX221. For the details of the semi-absolute model, please refer to P.29. RDV-P has an incremental model only.

Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.524 for details on robot cable.

Note 3. If a flexible cable is needed for the SR1-P, TS-P, or RDV-P, then select 3K/5K/10K. On the RCX221, the standard cable is a flexible cable, so enter 3L/5L/10L when ordering.

Note 4. These controllers can be mounted on DIN rails. See P.460 for details.

Note 5. Select this selection when using the gateway function. For details, see P.453.

Note. It is possible to provide the model without a cable carrier. To find information on wiring (cable terminals) within the cable carrier see P.532.

Specifications

Model	MR12	MR12D
Driving method / Shaft diameter	Shaft motor / $\phi 12$	
Repeatability (μm)	+/-5 or less	
Scale (μm)	Magnetic type: resolution of 1	
Maximum speed ^{Note 1} (mm/sec)	2500	
Rated thrust (N)	18	
Maximum payload ^{Note 2} (kg)	5	
Stroke (mm)	50 to 1050 (50mm pitch)	
Linear guide	4 rows of circular arc grooves $\times$ 2 rail	
Maximum cross-section outside dimensions (mm)	W60 $\times$ H90 (except the cable carrier section)	
Total length (mm)	Stroke+288	Stroke+488
Cable length (m)	Standard: 3.5 / Option: 5,10	

Note. A vertical model (with brake) is not available with the PHASER series.
Note. The basic specifications of semi-absolute model are the same as those of the incremental model.

Note 1. Maximum speed may not be obtained depending on operating conditions.

Note 2. Maximum payload per carriage.

Allowable overhang

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)			
	A	B	C		A	B	C
1kg	600	600	600	1kg	600	600	600
2kg	1200	1200	598	2kg	529	1200	1200
3kg	1800	1800	406	3kg	323	1450	1800
5kg	3000	1561	241	5kg	162	589	3000

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.


Static loading moment

(Unit: N-m)			
MY	MP	MR	
107	107	89	


Controller



Controller	Operating method
SR1-P05	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221 RCX240/340	
TS-P105	I/O point trace / Remote command
TS-P205	
RDV-P205	Pulse train control

Cable carrier entry location

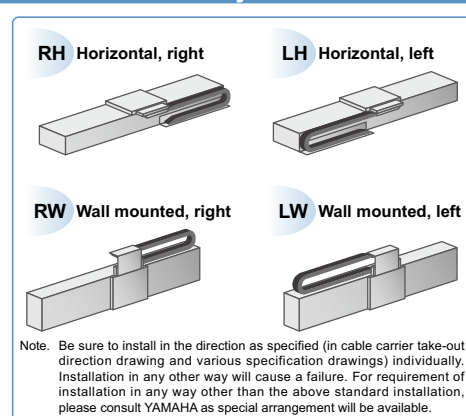


Optional cable carrier for users

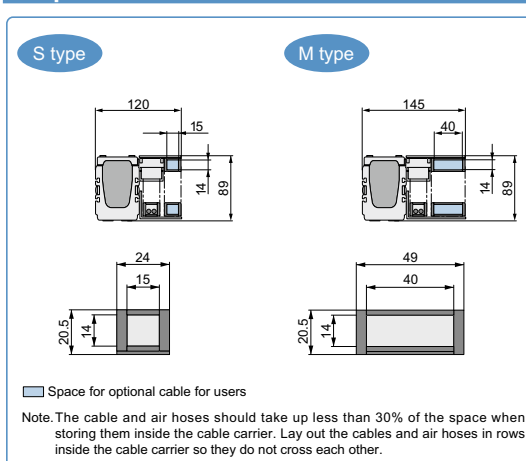

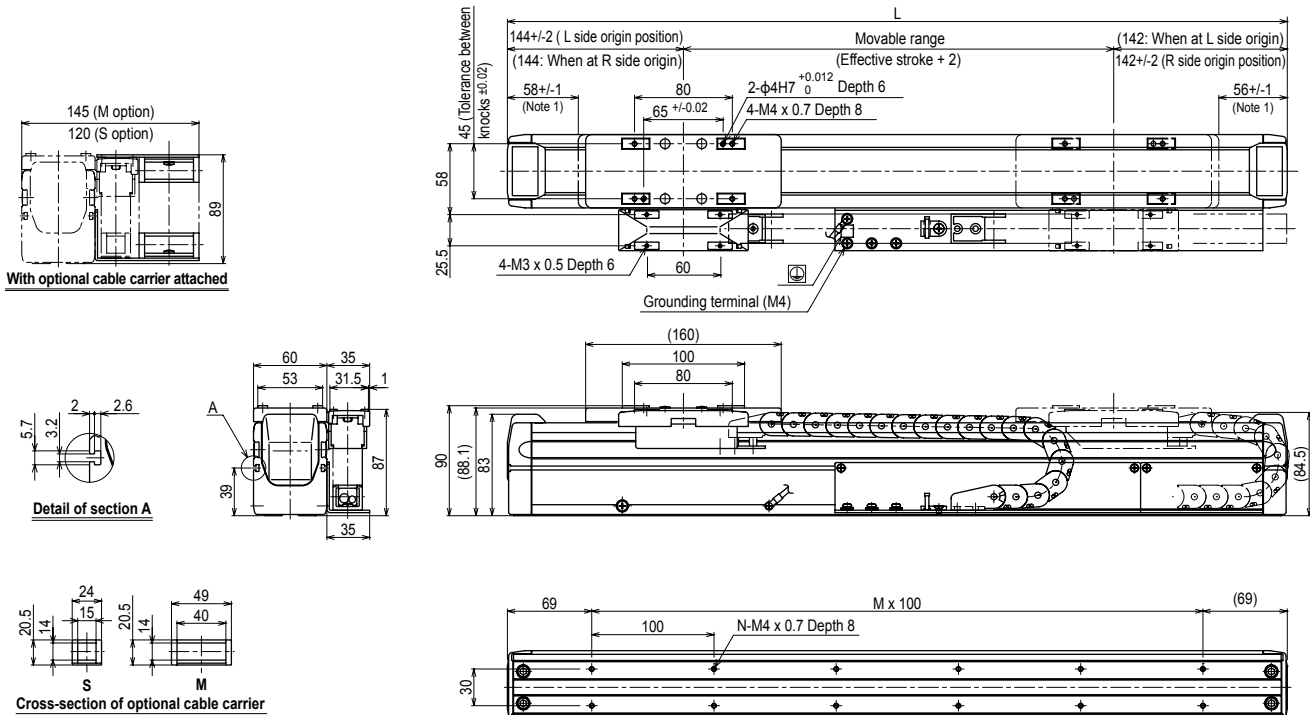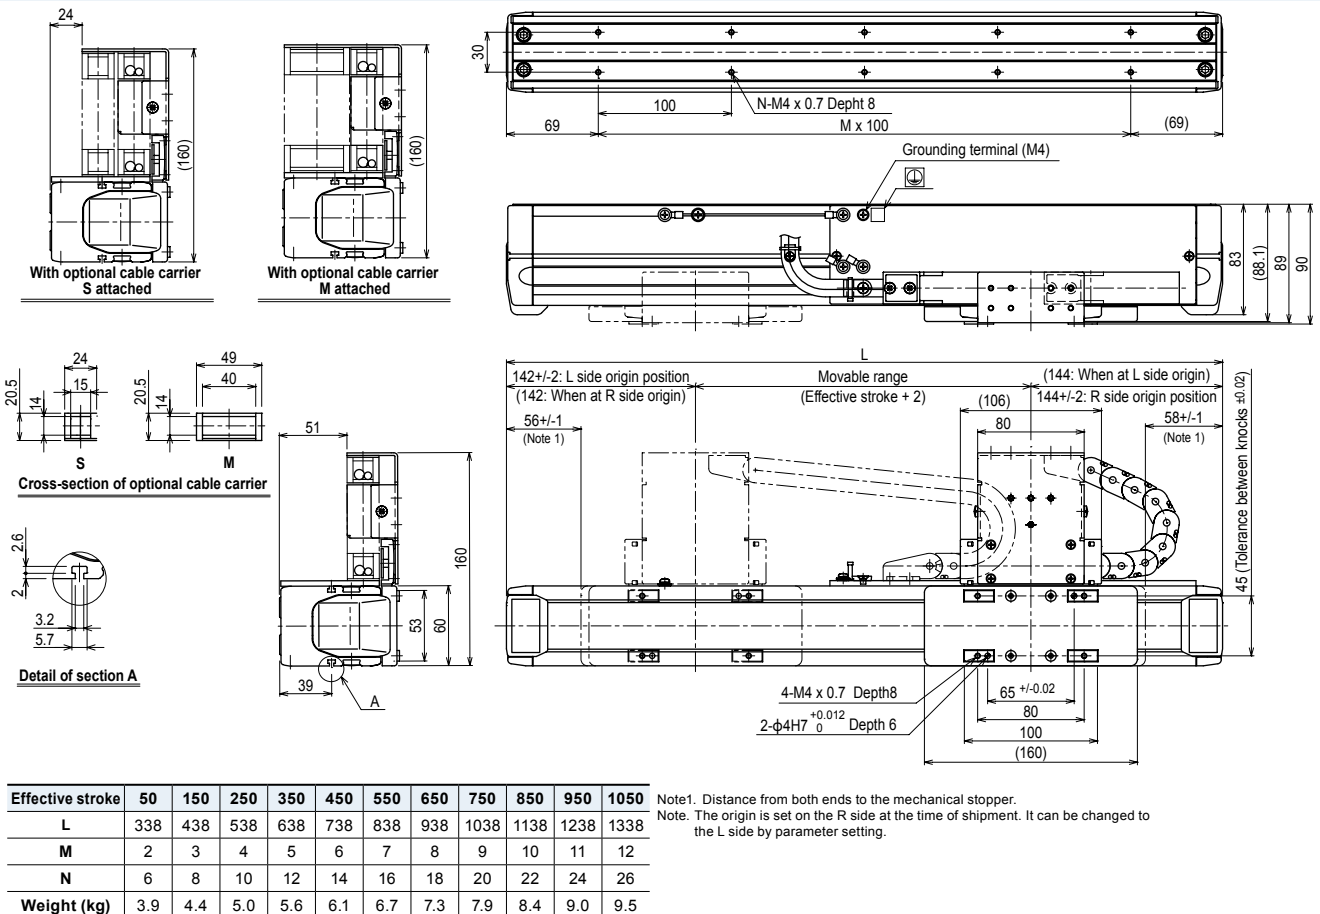
MR12 single carriage horizontal mount model **RH**MR12 single carriage wall mount model **RW**

MR12/MR12D

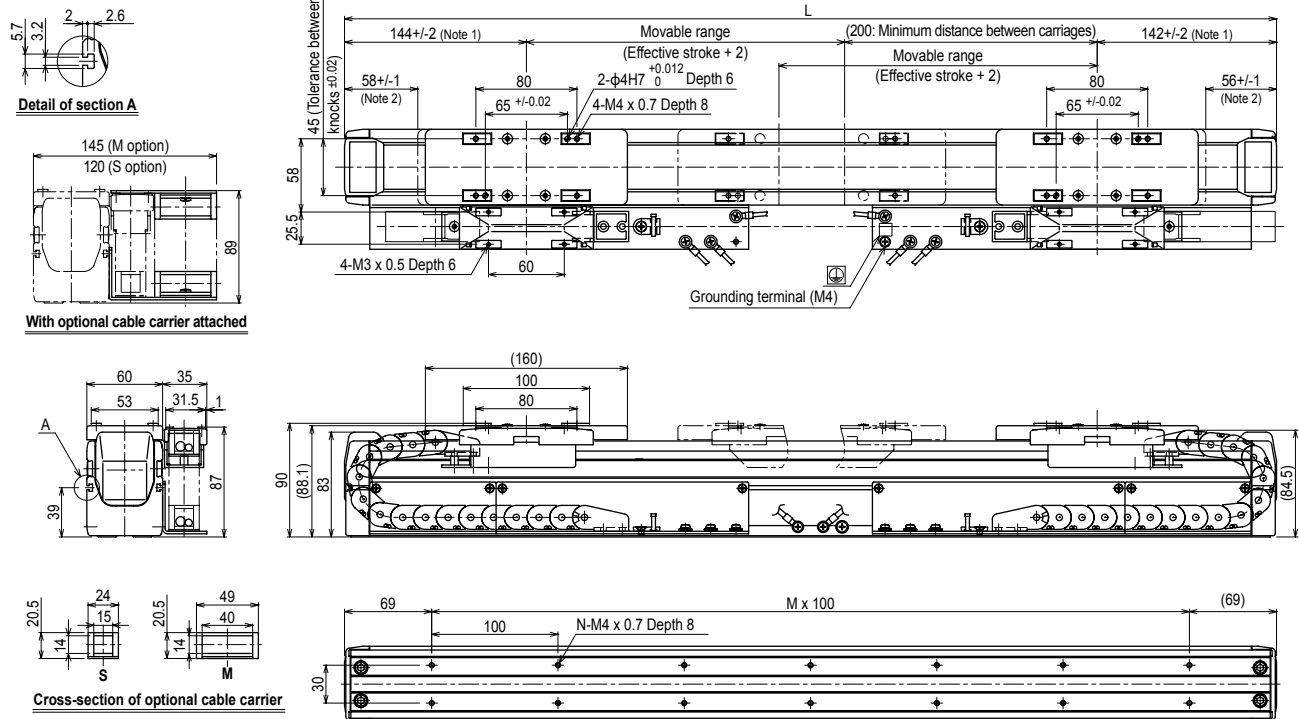MR12D double carriage horizontal mount model **H**

Effective stroke	50	150	250	350	450	550	650	750	850	950	1050
L	538	638	738	838	938	1038	1138	1238	1338	1438	1538
M	4	5	6	7	8	9	10	11	12	13	14
N	10	12	14	16	18	20	22	24	26	28	30
Weight (kg)	5.7	6.3	6.8	7.3	8.0	8.6	9.1	9.7	10.2	10.8	11.3

Note1. Position of the table slider when returned to the origin.
Note2. Distance from both ends to the mechanical stopper.

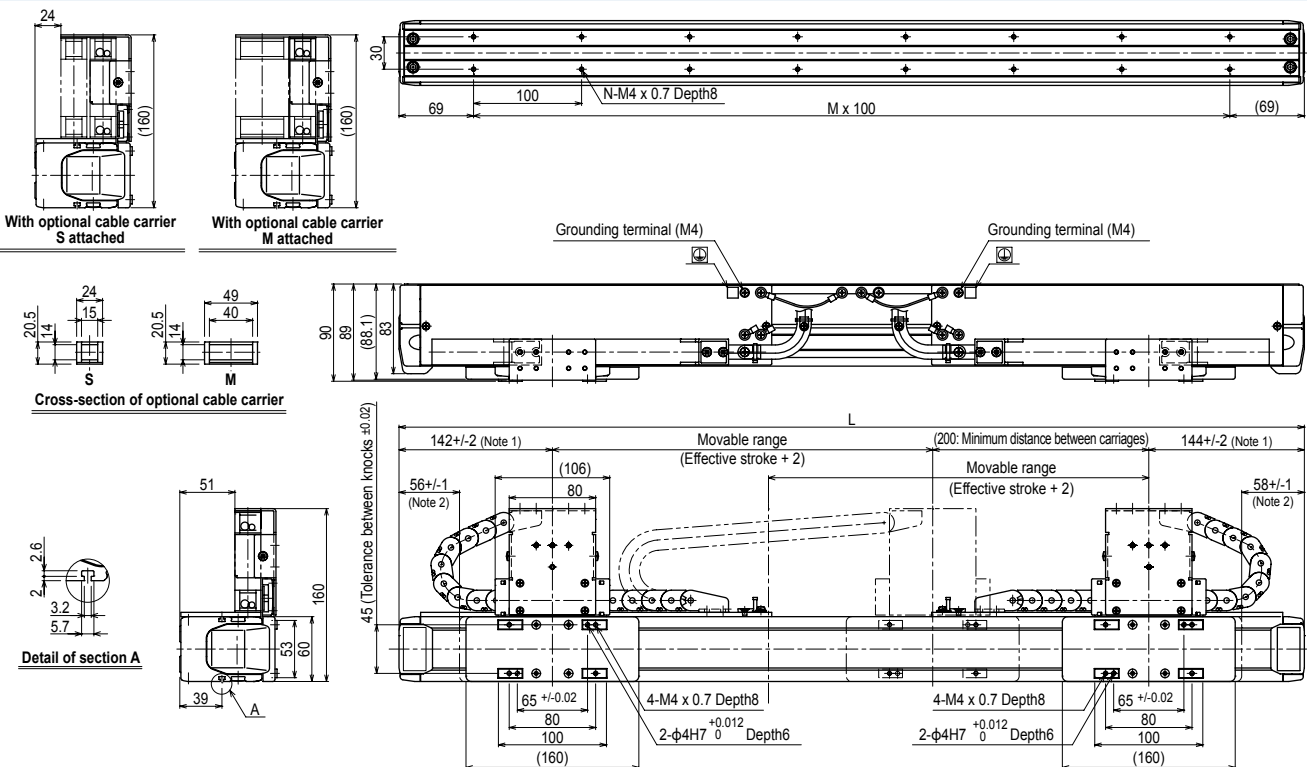MR12D double carriage wall mount model **W**

Effective stroke	50	150	250	350	450	550	650	750	850	950	1050
L	538	638	738	838	938	1038	1138	1238	1338	1438	1538
M	4	5	6	7	8	9	10	11	12	13	14
N	10	12	14	16	18	20	22	24	26	28	30
Weight (kg)	5.7	6.3	6.8	7.3	8.0	8.6	9.1	9.7	10.2	10.8	11.3

Note1. Position of the table slider when returned to the origin.
Note2. Distance from both ends to the mechanical stopper.