


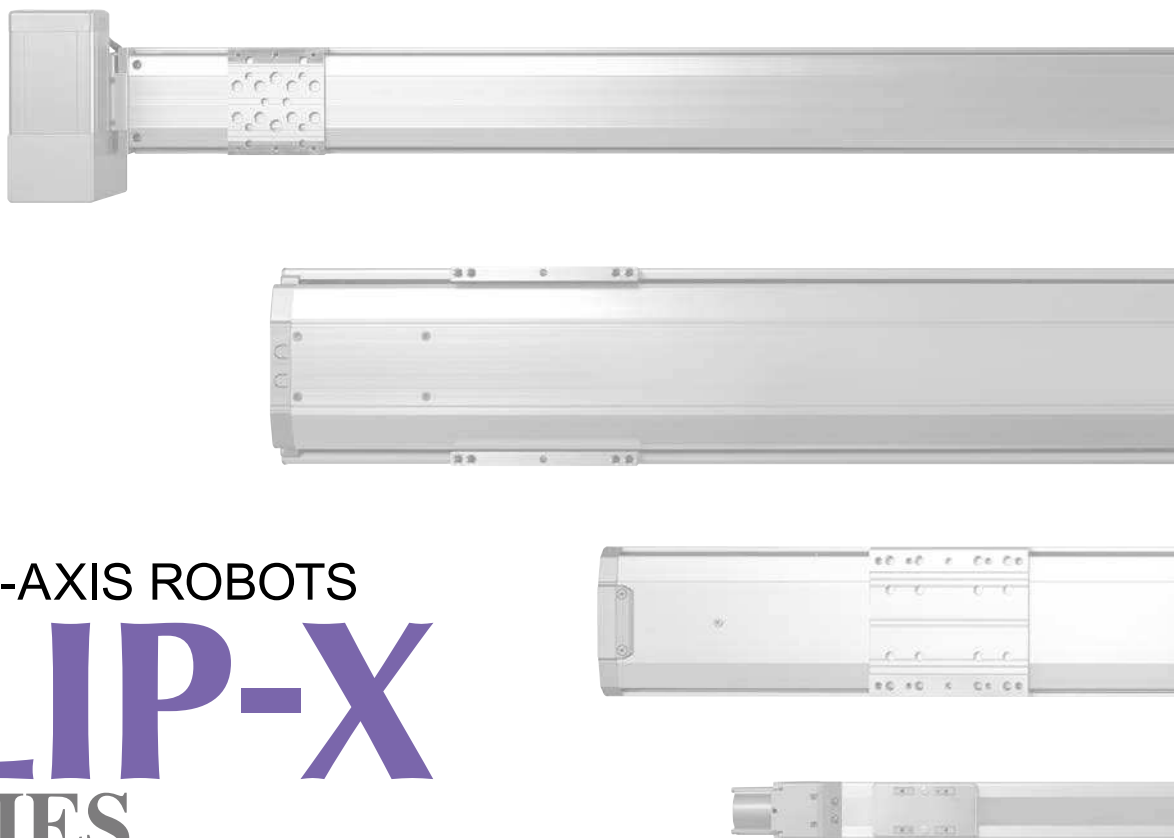

SINGLE-AXIS ROBOTS

FLIP-X

SERIES

CONTENTS

■ FLIP-X SPECIFICATION SHEET 170

■ Robot ordering method description 172

■ Robot ordering method terminology 173

T TYPE FRAME-LESS STRUCTURE MODEL

T4L	174
T4LH	175
T5L	176
T5LH	177
T6L	178
T9	179
T9H	180

F TYPE / GF TYPE HIGH RIGIDITY FRAME MODEL

F8	181
F8L	182
F8LH	184
F10	185
F10H	186
F14	188
F14H	189
GF14XL	190
F17	191

F17L	193
GF17XL	194
F20	195
F20N	197

N TYPE NUT ROTATION TYPE MODEL

N15	198
N15D	200
N18	202
N18D	204

B TYPE TIMING BELT DRIVE MODEL

B10	206
B14	208
B14H	210

R TYPE ROTATION AXIS TYPE MODEL

R5	212
R10	213
R20	214

FLIP-X SPECIFICATION SHEET

Type	Model	Motor output (W)	Repeat-ability (mm)	Lead (mm)	Payload (kg)		Stroke (mm) and maximum speed (mm/s)																					
					Horizontal	Vertical	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000		
T type	T4L/ T4LH	30	+/-0.02	12	4.5	1.2	720																					
				6	6	2.4	360																					
				2	6	7.2	120																					
	T5L/ T5LH	30	+/-0.02	20	3	—	1200										960	840	720	660								
				12	5	1.2	800										640	560	480	440								
				6	9	2.4	400										320	280	240	220								
	T6L	60	+/-0.02	20	10	—	1333										1133	1000	866	800								
				12	12	4	800										680	600	520	480								
				6	30	8	400										340	300	260	240								
	T9	100	+/-0.01	30	15	—				1800										1440			1170		900			
				20	30	4				1200											960		780		600			
				10	55	10				600											480		390		300			
5				80	20				300											240		195		150				
T9H	200	+/-0.01	30	25	—				1800										1440			1170		900				
			20	40	8				1200											960		780		600				
			10	80	20				600											480		390		300				
			5	100	30				300											240		195		150				
F type	F8	100	+/-0.02	20	12	—				1200								1080	900	780	720	600						
				12	20	4				720								648	540	468	432	360						
				6	40	8				360								324	270	234	216	180						
	F8L	100	+/-0.01	30	7	—				1800										1530	1350	1170	1080	990	900	810		
				20	20	4				1200										1020	900	780	720	660	600	540		
				10	40	8				600										510	450	390	360	330	300	270		
				5	50	16				300										255	225	195	180	165	150	135		
	F8LH	100	+/-0.01	20	30	—				1200								1020	900	780	720	660	600	540	480			
				10	60	—				600								510	450	390	360	330	300	270	240			
				5	80	—				300								255	225	195	180	165	150	135	120			
	F10	100	+/-0.01	30	15	—				1800										1440			1170		900			
				20	20	4				1200										960		780		600				
				10	40	10				600										480		390		300				
				5	60	20				300										240		195		150				
	F10H	200	+/-0.01	30	25	—				1800								1440	1260	1080		900		720		630		
				20	40	8				1200								960	840	720		600		480		420		
				10	80	20				600								480	420	360		300		240		210		
				5	100	30				300								240	210	180		150		120		105		
	F14	100	+/-0.01	30	15	—				1800										1440			1170		900			
				20	30	4				1200										960		780		600				
10				55	10				600										480		390		300					
5				80	20				300										240		195		150					
F14H	200	+/-0.01	30	25	—				1800										1440			1170		900				
			20	40	8				1200								960		780		600		480		420			
			10	80	20				600								480		390		300		240		210			
			5	100	30				300								240		195		150		120		105			
F17	400	+/-0.01	40	40	—					2400												1920		1680				
			20	80	15				1200												960		840					
			10	120	35				600												480		420					
F17L	600	+/-0.02	50	50	10																							
F20	600	+/-0.01	40	60	—					2400												1920		1680				
			20	120	25				1200												960		840					
			10	—	45				600												480		420					
F20N	400	+/-0.04	20	80	—																							
GF type	GF14XL	200	+/-0.01	20	45	—																						
	GF17XL	400	+/-0.01	20	90	—																						
N type	N15	400	+/-0.01	20	50	—																						
	N15D	400	+/-0.01	20	50	—																						
	N18	400	+/-0.01	20	80	—																						
	N18D	400	+/-0.01	20	80	—																						
B type	B10	100	+/-0.04	—	10	—																						
	B14	100	+/-0.04	—	20	—																						
	B14H	200	+/-0.04	—	30	—																						

Type	Model	Motor output (W)	Repeat-ability (sec)	Speed reduction ratio	Maximum speed (°/sec)	Detailed info page
R type	R5	50	+/-30	1/50	360	P.212
	R10	100	+/-30	1/50	360	P.213
	R20	200	+/-30	1/50	360	P.214

Precautions for use

■ Handling

Fully understand the contents stated in the "FLIP-X Series User's Manual" and strictly observe the handling precautions during operation.

■ Allowable installation ambient temperature

0 to 45 °C

																							Detailed info page		
	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500 to 1600	1650	1700	1750	1800	1850 to 2000	2050	2150	2250	2350	2400 to 2500	2550	2650 to 3050			
																							T4L: P.174 T4LH: P.175		
																							T5L: P.176 T5LH: P.177		
																							P.178		
																							P.179		
	810																								
	540																								
	270																								
	135																						P.180		
	810																								
	540																								
	270																								
	135																						P.181		
	720																						P.182		
	480																								
	240																								
	120																								
	420																						P.184		
	210																								
	105																								
	810																						P.185		
	540																								
	270																								
	135																								
																							P.186		
	810																						P.188		
	540																								
	270																								
	135																								
	810																						P.189		
	540																								
	270																								
	135																								
	1440		1200		960		840	720															P.191		
	720		600	480																					
	360		300	240																					
			2200			1900				1500		1200		900	800								P.193		
	1440		1200		960		840	720															P.195		
	720		600	480																					
	360		300	240																					
			1200																						P.197
1200																								P.190	
1200																								P.194	
1200																								P.198	
1200																								P.200	
1200																								P.202	
1200																								P.204	
1875																								P.206	
1875																								P.208	
1875																								P.210	

Articulated robots YA
Linear conveyor modules LCM100
Compact single-axis robots TRANSEVO
Single-axis robots FLIP-X
Linear motor single-axis robots PHASER
Cartesian robots XY-X
SCARA robots YK-X
Pick & place robots YP-X
CLEAN
CONTROLLER
INFORMATION
T type
F type
GF type
N type
B/R type

Robot ordering method description

In the order format for the YAMAHA single-axis robots FLIP-X series, the notation (letters/numbers) for the mechanical section is shown linked to the controller section notation.

[Example]

● Mechanical ▶ F8

- Lead ▶ 20mm
- Brake ▶ Yes
- Origin position ▶ Non-motor side
- Grease ▶ Standard
- Stroke ▶ 500mm
- Cable length ▶ 3.5m

● Controller ▶ SR1-X

- Usable for CE ▶ Not required
- Regenerative unit ▶ Not required
- I/O selection ▶ NPN
- Battery ▶ With battery

● Ordering method

F8-20-BK-Z-500-3L-SR1-X05-N-B

Mechanical section

Controller section

This page describes using the ordering form for mechanical components.

To find detailed controller information see the controller page.

SR1-X ▶ [P.516](#), TS-X ▶ [P.490](#), RDV-X ▶ [P.504](#)

Mechanical section

● T type / F type (F8 / F8L / F8LH)

① Model	③ Lead designation	④ Brake	⑩ Option	⑪ Stroke	⑫ Cable length
T4L F8 T4LH F8L T5L F8LH T5LH T6 T9 T9H	30 30mm 20 20mm 12 12mm 10 10mm 6 6mm 5 5mm 2 2mm	No entry No brakes BK Brakes provided	Origin position change None Z Standard Non-motor side Grease type None GC Standard Clean		3L 3.5m 5L 5m 10L 10m 3K 3.5m 5K 5m 10K 10m

● F type (Except F8 / F8L / F8LH)

① Model	③ Lead designation	④ Brake	⑥ Cable entry location	⑩ Option	⑪ Stroke	⑫ Cable length
F10 F20 F10H F20N F14 F14H F17 F17L	50 50mm 40 40mm 30 30mm 20 20mm 10 10mm 5 5mm	No entry No brakes BK Brakes provided	No entry Standard (S) U From the top R From the right L From the left	Origin position change None Z Standard Non-motor side Grease type None GC Standard Clean		3L 3.5m 5L 5m 10L 10m 3K 3.5m 5K 5m 10K 10m

● GF type

① Model	② Model	⑤ Take out direction	③ Lead designation	⑥ Cable entry location	⑩ Option	⑪ Stroke	⑫ Cable length
GF14XL GF17XL	S Straight model	H Horizontal installation	20 20mm	No entry Standard (S) U From the top R From the right L From the left	Origin position change None Z Standard Non-motor side Frame No entry (Spot facing) T Tapping Grease type None GC Standard Clean		3L 3.5m 5L 5m 10L 10m 3K 3.5m 5K 5m 10K 10m

● N type (Single carriage)

① Model	③ Lead designation	⑦ Cable carrier entry location	⑧ Cable carrier specification	⑩ Option	⑪ Stroke	⑫ Cable length
N15 N18	20 20mm	RH Horizontal, right LH Horizontal, left RW Wall, right LW Wall, left	S Standard cable carrier M Optional cable carrier	Origin position change None Z Standard Non-motor side Grease type None GC Standard Clean		3L 3.5m 5L 5m 10L 10m 3K 3.5m 5K 5m 10K 10m

● N type (Double carriage)

① Model	③ Lead designation	⑤ Take out direction	⑧ Cable carrier specification	⑩ Option	⑪ Stroke	⑫ Cable length
N15D N18D	20 20mm	H Horizontal installation W Wall hanging installation	S Standard cable carrier M Optional cable carrier	Grease type None GC Standard Clean		3L 3.5m 5L 5m 10L 10m 3K 3.5m 5K 5m 10K 10m










● B type

① Model	⑨ Motor installation direction	⑩ Option	⑪ Stroke	⑫ Cable length
B10 B14 B14H	L Motor leftward, horizontal position R Motor rightward, horizontal position LU Motor leftward, upper position RU Motor rightward, upper position LD Motor leftward, lower position RD Motor rightward, lower position	Grease type None GC Standard Clean		3L 3.5m 5L 5m 10L 10m 3K 3.5m 5K 5m 10K 10m

● R type

① Model	⑥ Cable entry location	⑫ Cable length
R5 R10 R20	No entry Standard (S) B From the side	3L 3.5m 5L 5m 10L 10m 3K 3.5m 5K 5m 10K 10m

Robot ordering method terminology

① Model	Enter the robot unit model.
② Model	Straight model only (GF type)
③ Lead designation	Select the ball screw lead.
④ Brake	Select Brake or No-brake. Horizontal specs : No-brake Vertical specs : with Brake
⑤ Take out direction	Select what direction to install the robot (horizontal / wall mounted).
⑥ Cable entry location	Select what direction to extract the robot cable connecting the robot and controller.
⑦ Cable carrier entry location	Select what direction to install the robot (horizontal / wall mounted) and what direction to extract the robot cable carrier. RH Horizontal, right RW Wall, right LH Horizontal, left LW Wall, left  Note. Be sure to install in the direction as specified (in cable carrier take-out direction drawing and various specification drawings) individually. Installation in any other way will cause a failure. For requirement of installation in any way other than the above standard installation, please consult YAMAHA as special arrangement will be available.
⑧ Cable carrier specification	Select the cable carrier size for the customer wiring. S type Standard cable carrier  M type Optional cable carrier  Note. Cannot pass more than 3 urethane hoses (φ6 x 4). Space for optional cable for users
⑨ Motor installation direction	Select what direction to install the motor. L type Leftward at horizontal position  R type Rightward at horizontal position  UL type Leftward at upper position  UR type Rightward at upper position  LD type Leftward at lower position  RD type Rightward at lower position 
⑩ Option	Origin position change: Origin point position can be changed.
	Frame: Hole to secure the frame can be selected. (Spot facing/tapping)
	Grease type: Clean grease can be selected.
⑪ Stroke	Select the stroke for the robot movement range.
⑫ Cable length	Select the robot cable length to use for connecting the robot to the controller. 1L : 1m (You can select a 1m cable only when you use T4L/T5L.) 3L : 3.5m (Standard) 5L : 5m 10L : 10m 3K : 3.5m (Flexible cable) 5K : 5m (Flexible cable) 10K : 10m (Flexible cable)

Articulated robots
YA

Linear conveyor models
LCM100

Compact single-axis robots
TRANSEVO

Single-axis robots
FLIP-X

Linear motor single-axis robots
PHASER

Cartesian robots
XY-X

SCARA robots
YK-X

Pick & place robots
YP-X

CLEAN

CONTROLLER INFORMATION

T type

F type

GF type

N type

B/R type

T4L

Origin on the non-motor side is selectable

Controller: 24V



Ordering method

T4L						ERCD	
Model	Lead designation	Brake	Origin position change	Grease type	Stroke	Cable length	I/O connector specification
	12: 12mm 6: 6mm 2: 2mm	No entry: No brakes BK: Brakes provided	None: Standard Z: Non-motor side	None: Standard GC: Clean	50 to 400 (50mm pitch)	1L: 1m 3L: 3.5m 5L: 5m 10L: 10m 1K/3K/5K/10K (Flexible cable)	CN1: I/O flat cable 1m (Standard) CN2: Twisted-pair cable 2m (pulse train function)

Note 1. The robot cable is standard cable (1L/3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.


Specifications

AC servo motor output (W)	30		
Repeatability ^{Note 1} (mm)	±/0.02		
Deceleration mechanism	Ball screw φ8 (Class C10)		
Ball screw lead (mm)	12	6	2
Maximum speed (mm/sec)	720	360	120
Maximum payload (kg)	Horizontal	4.5	6
	Vertical	1.2	2.4
Rated thrust (N)	32	64	153
Stroke (mm)	50 to 400 (50mm pitch)		
Overall length (mm)	Horizontal	Stroke+198	
	Vertical	Stroke+236	
Maximum dimensions of cross section of main unit (mm)	W45 × H53		
Cable length (m)	Standard: 3.5 / Option: 1.5,10		
Linear guide type	2 rows of gothic arch grooves × 1 rail		
Position detector	Resolvers ^{Note 2}		
Resolution (Pulse/rotation)	16384		


Note 1. Positioning repeatability in one direction.

Note 2. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.


Allowable overhang^{Note}



Horizontal installation (Unit: mm)	A	B	C
Lead 12	2kg 433	87	180
4.5kg	223	33	75
Lead 6	3kg 515	58	135
6kg	340	26	62
Lead 2	3kg 1585	58	142
6kg	755	27	66



Wall installation (Unit: mm)	A	B	C
Lead 12	2kg 149	54	376
4.5kg	50	1	148
Lead 6	3kg 107	24	380
6kg	31	0	195
Lead 2	3kg 113	24	1180
6kg	32	0	440




Vertical installation (Unit: mm)	A	C
Lead 12	1.2kg 125	125
Lead 6	2.4kg 56	57
Lead 2	3kg 41	42
	7.2kg 0	0

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 300mm stroke models.

Static loading moment




(Unit: N·m)	MY	MP	MR
	15	19	18

Controller

Controller	Operation method
ERCD	Pulse train control / Programming / I/O point trace / Remote command / Operation using RS-232C communication

T4L

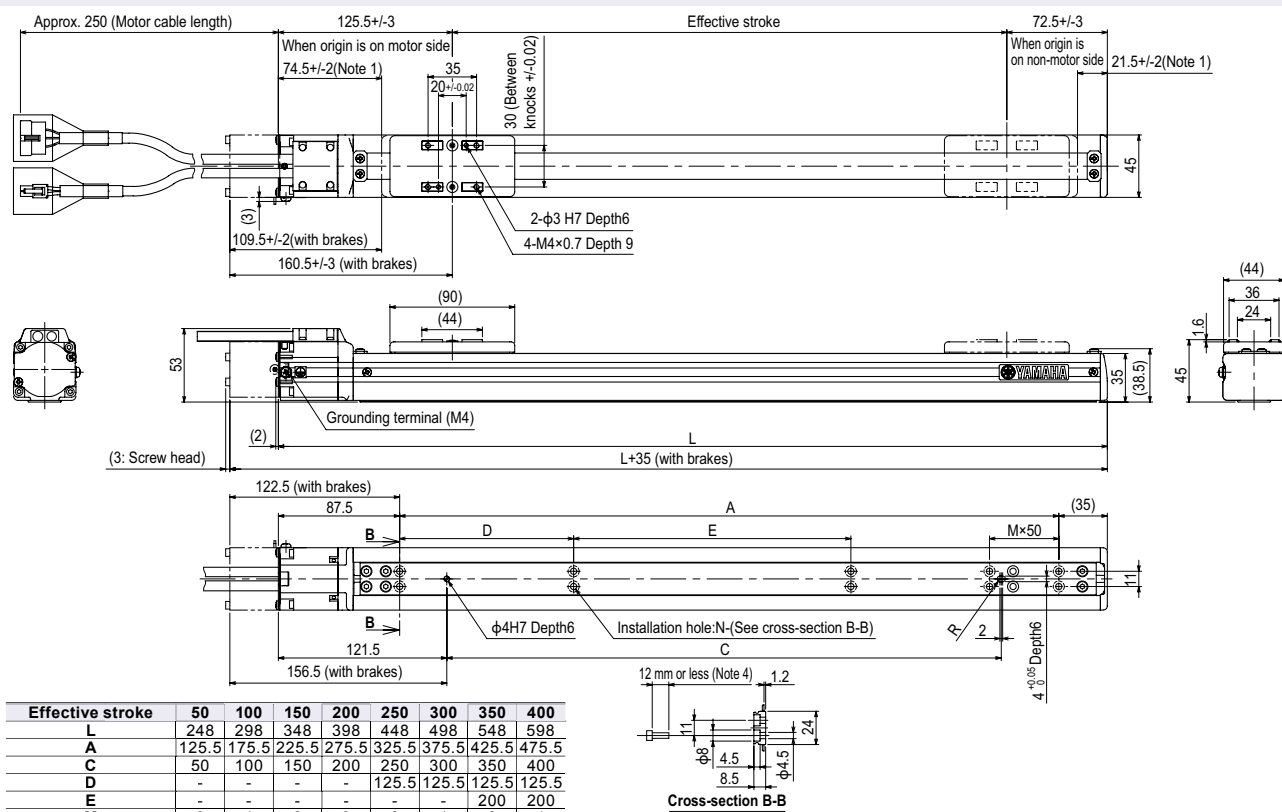

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. Minimum bend radius of motor cable is R30.

Note 3. Weight of models with no brake. The weight of brake-attached models is 0.2 kg heavier than the models with no brake shown in the table.

Note 4. The under-head length of the hex socket-head bolt (M4×0.7) to be used for the installation work is 12mm or less.

Note 5. External view of T4LH is identical to T4L.



Ordering method

T4LH		TSX		SR1-X		RDV-X	
Model	Lead designation	Brake	Origin position change	Grease type	Stroke	Cable length^{Note 1}	Positioner^{Note 2}
	12: 12mm 6: 6mm 2: 2mm	No entry: No brakes BK: Brakes provided	None: Standard Z: Non-motor side	None: Standard GC: Clean	50 to 400 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	TS-X
							Driver: Power-supply voltage / Power capacity
							105: 100V/100W or less 205: 200V/100W or less
							LCD monitor
							No entry: None L: With LCD
							I/O selection
							NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 3}
							Battery
							B: With battery (Absolute) N: None (Incremental)
							Controller
							05
							Driver: Power capacity
							05: 100W or less
							Usable for CE
							No entry: Standard E: CE marking
							I/O selection
							N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS
							Battery
							B: With battery (Absolute) N: None (Incremental)
							Driver
							2: AC200V
							Driver: Power capacity
							05: 100W or less

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.

Note 2. See P.498 for DIN rail mounting bracket.

Note 3. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	30
Repeatability ^{Note 1} (mm)	+/-0.02
Deceleration mechanism	Ball screw $\phi 8$ (Class C10)
Ball screw lead (mm)	12 6 2
Maximum speed (mm/sec)	720 360 120
Maximum payload (kg)	Horizontal 4.5 6 6 Vertical 1.2 2.4 7.2
Rated thrust (N)	32 64 153
Stroke (mm)	50 to 400 (50mm pitch)
Overall length (mm)	Horizontal Stroke+198 Vertical Stroke+236
Maximum dimensions of cross section of main unit (mm)	W45 x H53
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	2 rows of gothic arch grooves x 1 rail
Position detector	Resolvers ^{Note 2}
Resolution (Pulse/rotation)	16384

Note 1. Positioning repeatability in one direction.

Note 2. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang^{Note}

	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
Lead 12	2kg 341 90 174 4.5kg 172 37 72	2kg 140 73 300 4.5kg 47 22 119	Lead 12 1.2kg 122 121
Lead 6	3kg 355 58 134 6kg 235 27 62	3kg 105 42 260 6kg 31 11 135	Lead 6 2.4kg 56 57
Lead 2	3kg 1105 59 142 6kg 520 27 66	3kg 113 42 810 6kg 32 11 305	Lead 2 3kg 41 42 7.2kg 0 0

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 300mm stroke models.


Static loading moment

	MY	MP	MR
(Unit: N-m)	15	19	18

Controller

Controller	Operation method
SR1-X05	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221/222	
RCX240/340	
TS-X105	I/O point trace / Remote command
TS-X205	
RDV-X205	Pulse train control

T4LH

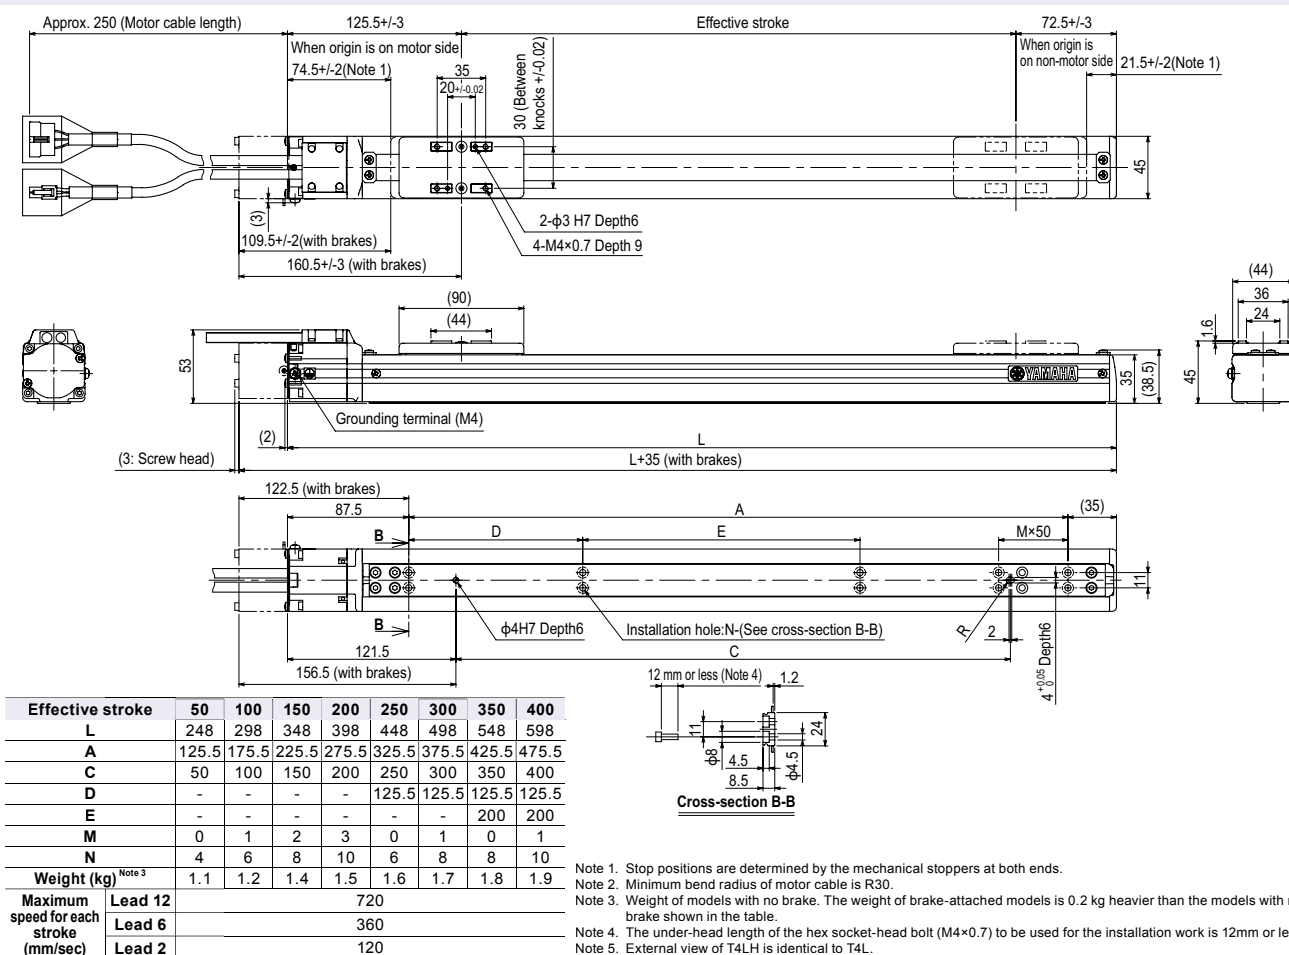

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. Minimum bend radius of motor cable is R30.

Note 3. Weight of models with no brake. The weight of brake-attached models is 0.2 kg heavier than the models with no brake shown in the table.

Note 4. The under-head length of the hex socket-head bolt (M4x0.7) to be used for the installation work is 12mm or less.

Note 5. External view of T4LH is identical to T4L.

T5L

High lead: Lead 20

Origin on the non-motor side is selectable

Controller: 24V



Ordering method

T5L						ERCD	
Model	Lead designation	Brake	Origin position change	Grease type	Stroke	Cable length	I/O connector specification
	20: 20mm 12: 12mm 6: 6mm	No entry: No brakes BK: Brakes provided	None: Standard Z: Non-motor side	None: Standard GC: Clean	50 to 800 (50mm pitch)	1L: 1m 3L: 3.5m 5L: 5m 10L: 10m 1K/3K/5K/10K (Flexible cable)	CN1: I/O flat cable 1m (Standard) CN2: Twisted-pair cable 2m (pulse train function)

Note 1. The model with a lead of 20mm cannot select specifications with brake (vertical specifications).

Note 2. The robot cable is standard cable (1L/3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.

Specifications

AC servo motor output (W)	30
Repeatability (mm)	+/-0.02
Deceleration mechanism	Ball screw $\phi 12$ (Class C10)
Ball screw lead (mm)	20 12 6
Maximum speed (mm/sec)	1200 800 400
Maximum payload (kg)	Horizontal 3 5 9 Vertical - 1.2 2.4
Rated thrust (N)	19 32 64
Stroke (mm)	50 to 800 (50mm pitch)
Overall length (mm)	Horizontal Stroke+201.5 Vertical Stroke+239.5
Maximum dimensions of cross section of main unit (mm)	W55×H52
Cable length (m)	Standard: 3.5 / Option: 1.5, 10
Linear guide type	2 rows of gothic arch grooves × 1 rail
Position detector	Resolvers
Resolution (Pulse/rotation)	16384

Note 1. Positioning repeatability in one direction.

Note 2. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.

Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)				Vertical installation (Unit: mm)	
	A	B	C		A	B	C	Lead 12	A C
Lead 20	1kg 600 323 683			Lead 20	1kg 600 291 600			1.2kg 242 240	
3kg 675 103 247				3kg 215 73 589				2.4kg 113 113	
2kg 1170 159 406				2kg 368 127 1082					
5kg 555 59 155				5kg 127 30 449					
Lead 6	3kg 1498 104 294			3kg 263 73 970					
9kg 628 31 89				9kg 54 0 400					

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 600mm stroke models.


Static loading moment

MY	MP	MR
30	34	40

Controller

Controller	Operation method
ERCD	Pulse train control / Programming / I/O point trace / Remote command / Operation using RS-232C communication

T5L

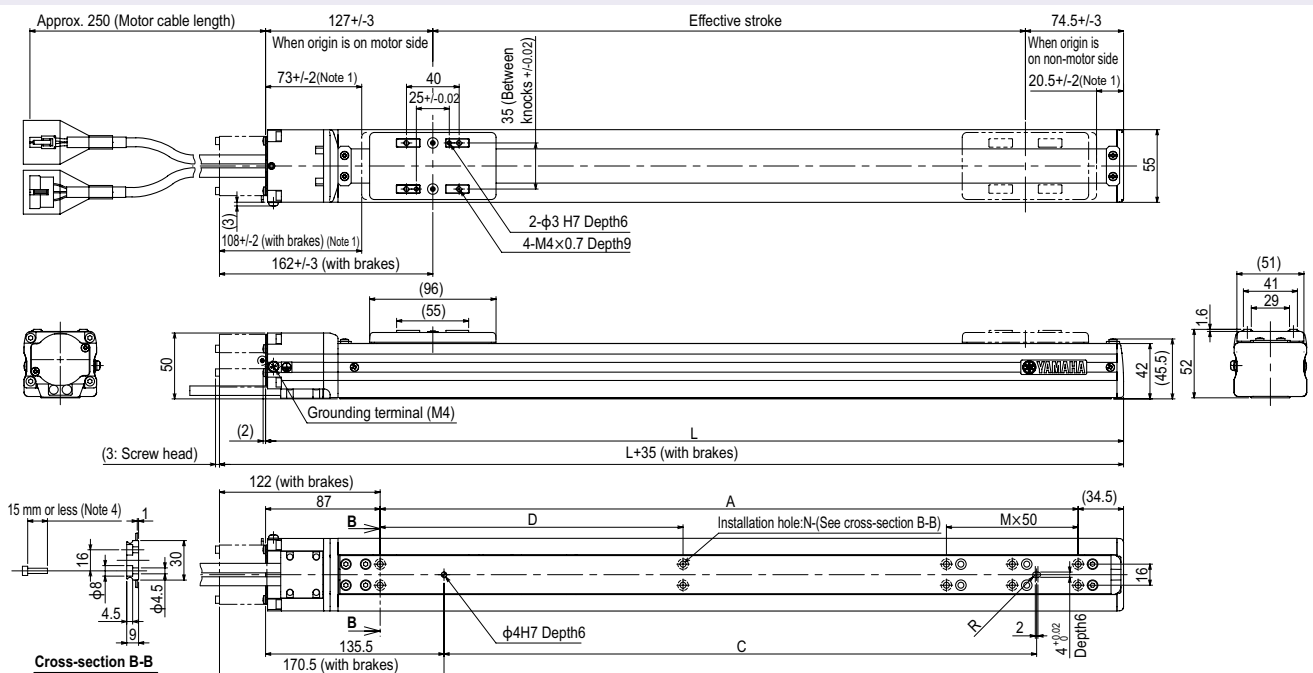

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	251.5	301.5	351.5	401.5	451.5	501.5	551.5	601.5	651.5	701.5	751.5	801.5	851.5	901.5	951.5	1001.5
A	130	180	230	280	330	380	430	480	530	580	630	680	730	780	830	880
C	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
D	-	-	-	-	-	230	230	230	230	230	230	230	230	230	230	230
M	0	1	2	3	4	5	0	1	2	3	4	5	6	7	8	9
N	4	6	8	10	12	14	6	8	10	12	14	16	18	20	22	24
Weight (kg)	1.7	1.8	2.0	2.2	2.3	2.5	2.7	2.8	3.0	3.2	3.3	3.5	3.7	3.8	4.0	4.2
Maximum speed for each stroke	Lead 20 1200												960	840	720	660
Lead 12 800													640	560	480	440
Lead 6 400													320	280	240	220
Speed setting	-												80%	70%	60%	55%

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. Minimum bend radius of motor cable is R30.

Note 3. Weight of models with no brake. The weight of brake-attached models is 0.2 kg heavier than the models with no brake shown in the table.

Note 4. The under-head length of the hex socket-head bolt (M4×0.7) to be used for the installation work is 15mm or less.

Note 5. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table at the left.

Note 6. External view of T5LH is identical to T5L.



Ordering method

T6L

Model	Lead designation	Brake ^{Note 1}	Origin position change	Grease type	Stroke	Cable length ^{Note 2}
	20: 20mm 12: 12mm 6: 6mm	No entry: No brakes BK: Brakes provided	None: Standard Z: Non-motor side	None: Standard GC: Clean	50 to 800 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

TSX

Positioner ^{Note 3}	Driver: Power supply voltage / Power capacity	LCD monitor	I/O selection	Battery
TS-X	105: 100V/100W or less 205: 200V/100W or less	No entry: None L: With LCD	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 4}	B: With battery (Absolute) N: None (Incremental)

SR1-X

Controller	Driver: Power capacity	Usable for CE	I/O selection	Battery
05	05: 100W or less	No entry: Standard E: CE marking	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	B: With battery (Absolute) N: None (Incremental)

RDV-X

Driver	Power supply voltage	Driver: Power capacity	Regenerative unit
	2: AC200V	05: 100W or less	RBR1


- Note 1. The model with a lead of 20mm cannot select specifications with brake (vertical specifications).
Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
Note 3. See P.498 for DIN rail mounting bracket.
Note 4. Select this selection when using the gateway function. For details, see P.60.

Specifications


AC servo motor output (W)	60
Repeatability ^{Note 1} (mm)	+/-0.02
Deceleration mechanism	Ball screw $\phi 12$ (Class C10)
Ball screw lead (mm)	20 12 6
Maximum speed ^{Note 2} (mm/sec)	1333 800 400
Maximum payload (kg)	Horizontal 10 12 30 Vertical - 4 8
Rated thrust (N)	51 85 170
Stroke (mm)	50 to 800 (50mm pitch)
Overall length (mm)	Horizontal Stroke+247.5 Vertical Stroke+285.5
Maximum dimensions of cross section of main unit (mm)	W65×H56
Cable length (m)	Standard: 3.5 / Option: 5,10
Linear guide type	2 rows of gothic arch grooves × 1 rail
Position detector	Resolvers ^{Note 3}
Resolution (Pulse/rotation)	16384

- Note 1. Positioning repeatability in one direction.
Note 2. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.


Allowable overhang^{Note}



Horizontal installation (Unit: mm)	A	B	C
Lead 20	2kg 319	184	234
6kg	98	37	77
10kg	64	0	55
Lead 12	3kg 624	125	335
8kg	273	41	121
12kg	216	24	77
Lead 6	5kg 694	73	236
10kg	374	33	109
30kg	159	0	25




Wall installation (Unit: mm)	A	B	C
Lead 20	2kg 234	152	265
6kg	61	13	71
10kg	30	0	42
Lead 12	3kg 293	96	510
8kg	89	14	210
12kg	43	0	130
Lead 6	5kg 204	45	530
10kg	72	0	245
30kg	0	0	0



Vertical installation (Unit: mm)	A	C
Lead 12	1kg 355	352
2kg	165	165
4kg	70	72
Lead 6	2kg 171	172
4kg	73	74
8kg	23	26

- Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.
Note. Service life is calculated for 600mm stroke models.

Static loading moment




(Unit: N·m)	MY	MP	MR
	35	40	50

Controller

Controller	Operation method
SR1-X05 RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105 TS-X205	I/O point trace / Remote command
RDV-X205-RBR1	Pulse train control

T6L

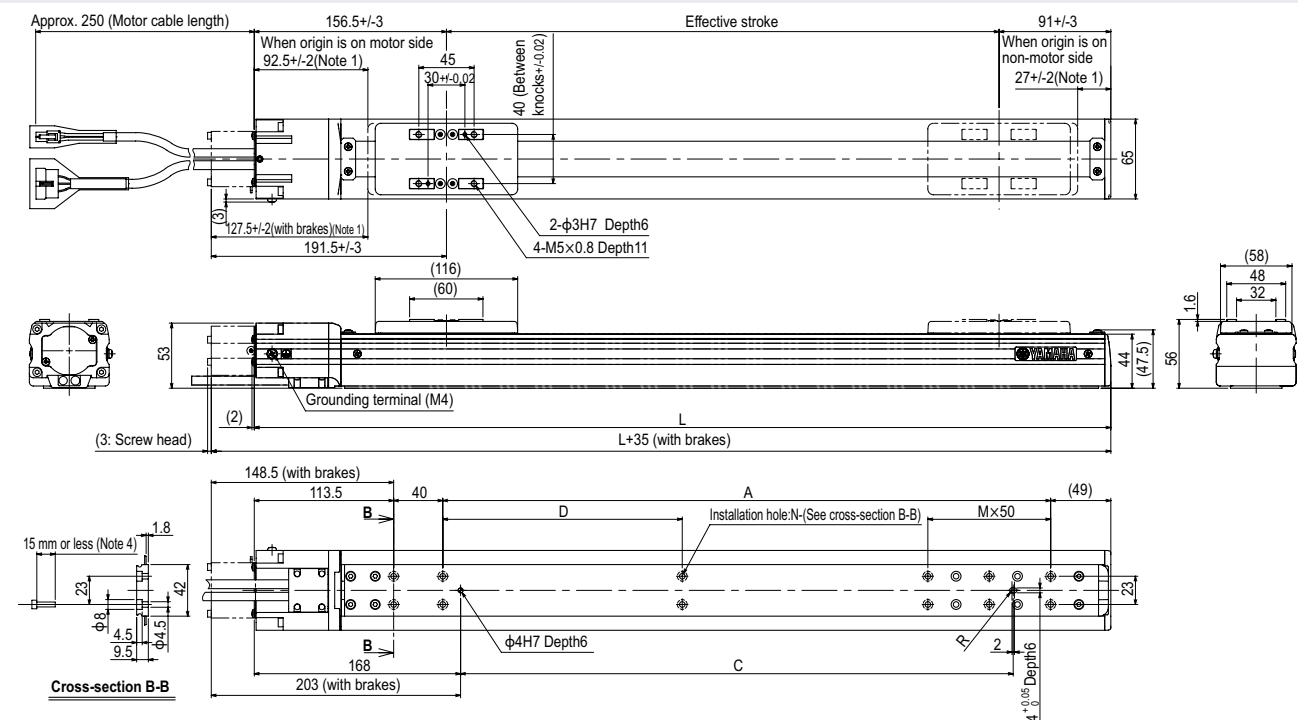

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	297.5	347.5	397.5	447.5	497.5	547.5	597.5	647.5	697.5	747.5	797.5	847.5	897.5	947.5	997.5	1047.5
A	95	145	195	245	295	345	395	445	495	545	595	645	695	745	795	845
C	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
D	-	-	-	-	-	-	195	195	195	195	195	195	195	195	195	195
M	0	1	2	3	4	5	0	1	2	3	4	5	6	7	8	9
N	6	8	10	12	14	16	8	10	12	14	16	18	20	22	24	26
Weight (kg) ^{Note 3}	2.4	2.6	2.8	3.1	3.3	3.5	3.7	4.0	4.2	4.4	4.6	4.8	5.1	5.3	5.5	5.7
Maximum speed for each stroke ^{Note 5} (mm/sec)	Lead 20 1333	Lead 12 800	Lead 6 400										1133	1000	866	800
Speed setting													85%	75%	65%	60%

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
Note 2. Minimum bend radius of motor cable is R30.
Note 3. Weight of models with no brake. The weight of brake-attached models is 0.2 kg heavier than the models with no brake shown in the table.
Note 4. The under-head length of the hex socket-head bolt (M4×0.7) to be used for the installation work is 15mm or less.
Note 5. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table at the left.

Note. Strokes longer than 1050mm are special order items. Please consult us for delivery time.

Ordering method

T9	Model	Lead designation 30: 30mm 20: 20mm 10: 10mm 5: 5mm	Brake ^{Note 1} No entry: No brakes BK: Brakes provided	Origin position change None: Standard Z: Non-motor side ^{Note 2}	Grease type None: Standard GC: Clean	Stroke Lead 20-10-5: 150 to 1050 (50mm pitch) Lead 30: 150 to 1250 (50mm pitch)	Cable length ^{Note 3} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	TSX	Positioner ^{Note 4} TS-X	Driver: Power-supply voltage Power capacity 105: 100V/100W or less 205: 200V/100W or less	Regenerative unit No entry: None R: With RGT	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 5}	Battery B: With battery (Absolute) N: None (Incremental)
	SR1-X	05						Controller	Driver: Power capacity 05: 100W or less	Usable for CE No entry: Standard E: CE marking	Regenerative unit No entry: None R: With RGT	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	Battery B: With battery (Absolute) N: None (Incremental)	
	RDV-X	2						Driver	Power-supply voltage 2: AC200V		05	RBR1	Regenerative unit 05: 100W or less	

- Note 1. The model with a lead of 30mm cannot select specifications with brake (vertical specifications).
 Note 2. If selecting 5mm lead specifications then the origin point cannot be changed to the non-motor side.
 Note 3. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
 Note 4. See P.498 for DIN rail mounting bracket.
 Note 5. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	100
Repeatability ^{Note 1} (mm)	+/-0.01
Deceleration mechanism	Ball screw (Class C7)
Ball screw lead (mm)	30 20 10 5
Maximum speed ^{Note 2} (mm/sec)	1800 1200 600 300
Maximum payload (kg)	Horizontal 15 30 55 80 Vertical 4 10 20
Rated thrust (N)	56 84 169 339
Stroke (mm)	150 to 1250 ^{Note 3} (50mm pitch)
Overall length (mm)	Horizontal Stroke+259 Vertical Stroke+289
Maximum dimensions of cross section of main unit (mm)	W94 × H98
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves × 1 rail
Position detector	Resolvers ^{Note 4}
Resolution (Pulse/rotation)	16384

- Note 1. Positioning repeatability in one direction.
 Note 2. When the stroke is longer than 700mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
 Note 3. Strokes longer than 1050mm are available only for high lead (Lead 30). (Special order item)
 Note 4. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang

Horizontal installation (Unit: mm)

	A	B	C
Lead 30			
5kg	864	501	383
15kg	491	156	140
Lead 20			
5kg	1292	505	462
15kg	572	158	151
30kg	455	73	75
Lead 10			
20kg	617	119	127
40kg	422	53	59
Lead 5			
55kg	420	36	40
50kg	722	42	47
60kg	657	33	37
80kg	577	23	25

Wall installation (Unit: mm)

	A	B	C
Lead 30			
5kg	348	384	776
15kg	87	40	306
Lead 20			
5kg	416	388	1186
15kg	92	42	386
30kg	0	0	61
Lead 10			
10kg	193	132	910
20kg	53	0	400
30kg	0	0	109
Lead 5			
10kg	197	133	2360
20kg	54	0	985
30kg	0	0	427

Vertical installation (Unit: mm)

	A	C
Lead 20		
1kg	600	600
2kg	1098	1098
Lead 10		
4kg	545	545
4kg	594	594
8kg	280	280
Lead 5		
10kg	217	217
10kg	221	221
15kg	135	135
20kg	92	92

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment


	MY	MP	MR
	86	133	117

Controller

Controller	Operation method
SR1-X05 ^{Note} RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105 ^{Note} TS-X205 ^{Note} RDV-X205-RBR1	I/O point trace / Remote command / Pulse train control

Note. Regenerative unit is required when the models used vertically and with 700mm or larger stroke.

T9

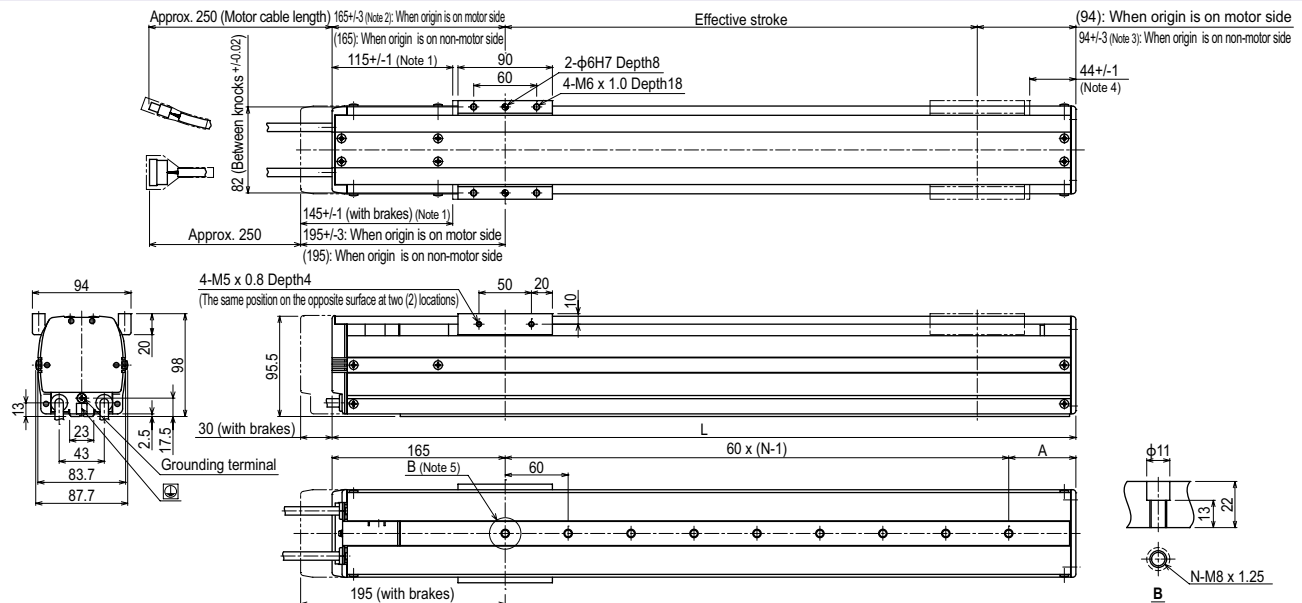

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. 167.5±1.4 when the high lead specification (Lead 30) is used.
 Note 3. 94±1.4 when the high lead specification (Lead 30) is used.
 Note 4. 41.5±1 when the high lead specification (Lead 30) is used.
 Note 5. When installing the unit, washers, etc., cannot be used in the φ11 counter bore hole.
 Note 6. Minimum bend radius of motor cable is R5.
 Note 7. Weight of models with no brake. The weight of brake-attached models is 0.5 kg heavier than the models with no brake shown in the table.

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
L	409	459	509	559	609	659	709	759	809	859	909	959	1009	1059	1109	1159	1209	1259	1309	1359	1409	1459	1509	1509
A	64	54	44	94	84	74	64	54	44	94	84	74	64	54	44	94	84	74	64	54	44	94	84	84
N	4	5	6	6	7	8	9	10	11	11	12	13	14	15	16	16	17	18	19	20	21	21	22	22
Weight (kg) ^{Note 7}	5.5	5.9	6.2	6.6	6.9	7.3	7.6	8.0	8.3	8.7	9.0	9.4	9.7	10.0	10.3	10.7	11.0	11.4	11.7	12.1	12.5	12.9	13.3	13.3
Maximum speed ^{Note 8} (mm/sec)	1800	1200	600	300	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Speed setting	80%	65%	50%	45%	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

- Note 8. When the stroke is longer than 700mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.
 Note 9. Strokes longer than 1050mm are special order items. Please contact us for speed setting.

T9H

● High lead: Lead 30

● Origin on the non-motor side is selectable: Lead 20-30

Note. Strokes longer than 1050mm are special order items. Please consult us for delivery time.

Ordering method

T9H						TSX					
Model	Lead designation	Brake	Origin position change	Grease type	Stroke	Cable length	Positioner	Driver	Regenerative unit	LCD monitor	I/O selection
	30: 30mm 20: 20mm 10: 10mm 5: 5mm	No entry/No brakes BK: Brakes provided	None: Standard Z: Non-motor side	None: Standard GC: Clean	Lead 20-10-5: 150 to 1050 (50mm pitch) Lead 30: 150 to 1250 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	TS-X	Driver: Power-supply voltage Power capacity 110: 100V/200W 210: 200V/200W	No entry: None R: With RGT	No entry: None L: With LCD	N: PNP PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ P: PROFIBUS QW: No I/O board
											Battery
											B: With battery (Absolute) N: None (Incremental)
SR1-X						10					
Controller	Driver	Usable for CE	Regenerative unit	I/O selection	Battery						
	10: 200W	No entry: Standard E: CE marking	No entry: None R: With RGT	N: PNP P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	B: With battery (Absolute) N: None (Incremental)						
RDV-X						2					
Driver	Power-supply voltage	Driver	Power capacity	Regenerative unit							
	2: AC200V		10: 200W or less								

- Note 1. The model with a lead of 30mm cannot select specifications with brake (vertical specifications).
 Note 2. If selecting 10mm-5mm lead specifications then the origin point cannot be changed to the non-motor side.
 Note 3. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
 Note 4. See P.498 for DIN rail mounting bracket.
 Note 5. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)		200
Repeatability (mm)		+/-0.01
Deceleration mechanism		Ball screw (Class C7)
Ball screw lead (mm)		30 20 10 5
Maximum speed (mm/sec)		1800 1200 600 300
Maximum payload (kg)		Horizontal 25 40 80 100 Vertical - 8 20 30
Rated thrust (N)		113 170 341 683
Stroke (mm)		150 to 1250 (50mm pitch)
Overall length (mm)		Horizontal Stroke+273 Vertical Stroke+303
Maximum dimensions of cross section of main unit (mm)		W94 x H98
Cable length (m)		Standard: 3.5 / Option: 5.10
Linear guide type		4 rows of circular arc grooves x 1 rail
Position detector		Resolvers
Resolution (Pulse/rotation)		16384

- Note 1. Positioning repeatability in one direction.
 Note 2. When the stroke is longer than 700mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
 Note 3. Strokes longer than 1050mm are available only for high lead (Lead 30). (Special order item)
 Note 4. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang

Horizontal installation (Unit: mm)		Wall installation (Unit: mm)		Vertical installation (Unit: mm)	
Lead	Load	Lead	Load	Lead	Load
30	10kg	10kg	140	10kg	4kg
	20kg	20kg	41	20kg	6kg
	30kg	30kg	0	30kg	8kg
	40kg	40kg	0	40kg	10kg
20	10kg	10kg	170	10kg	15kg
	20kg	20kg	46	20kg	20kg
	30kg	30kg	0	30kg	15kg
	40kg	40kg	0	40kg	20kg
10	10kg	10kg	228	10kg	133
	20kg	20kg	128	20kg	90
	30kg	30kg	52	30kg	90
	40kg	40kg	0	40kg	135
5	10kg	10kg	235	10kg	135
	20kg	20kg	24	20kg	92
	30kg	30kg	0	30kg	92
	40kg	40kg	0	40kg	49

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment


(Unit: N-m)		
MY	MP	MR
86	133	117

Controller

Controller	Operation method
SR1-X10 Note RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X110 Note TS-X210 Note RDV-X210-RBR1	I/O point trace / Remote command / Pulse train control

Note. When using the unit vertically, a regeneration unit is required.

T9H

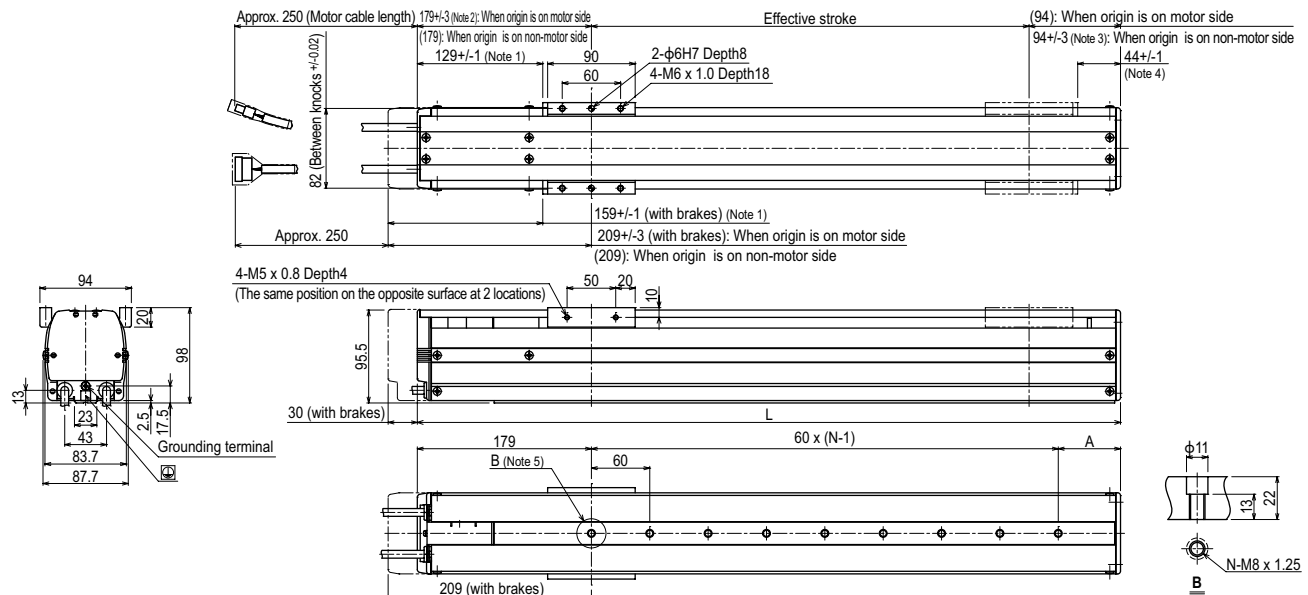

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. 181.5+/-4 when the high lead specification (Lead 30) is used.
 Note 3. 94+/-4 when the high lead specification (Lead 30) is used.
 Note 4. 41.5+/-1 when the high lead specification (Lead 30) is used.
 Note 5. When installing the unit, washers, etc., cannot be used in the φ11 counter bore hole.
 Note 6. Minimum bend radius of motor cable is R5.
 Note 7. Weight of models with no brake. The weight of brake-attached models is 0.5 kg heavier than the models with no brake shown in the table.

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	423	473	523	573	623	673	723	773	823	873	923	973	1023	1073	1123	1173	1223	1273	1323	1373	1423	1473	1523
A	64	54	44	94	84	74	64	54	44	94	84	74	64	54	44	94	84	74	64	54	44	94	84
N	4	5	6	6	7	8	9	10	11	11	12	13	14	15	16	16	17	18	19	20	21	21	22
Weight (kg)	5.8	6.2	6.5	6.9	7.3	7.7	8.0	8.4	8.8	9.1	9.5	9.9	10.2	10.6	11.0	11.4	11.7	12.1	12.5	12.9	13.3	13.7	14.1
Maximum speed (mm/sec)	Lead 30	1800																					
	Lead 20	1200																					
	Lead 10	600																					
	Lead 5	300																					
Speed setting		-																					

- Note 8. When the stroke is longer than 700mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.
 Note 9. Strokes longer than 1050mm are special order items. Please contact us for speed setting.



Ordering method

F8						TSX				
Model	Lead designation	Brake	Origin position change	Grease type	Stroke	Cable length	Positioner	Driver	LCD monitor	I/O selection
	20: 20mm 12: 12mm 6: 6mm	No entry: No brakes BK: Brakes provided	None: Standard Z: Non-motor side	None: Standard GC: Clean	150 to 800 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	TS-X	Driver: Power-supply voltage / Power capacity 105: 100V/100W or less 205: 200V/100W or less	No entry: None L: With LCD	N: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board
							SR1-X	05		
							Controller	Driver: Power capacity 05: 100W or less	Usable for CE No entry: Standard E: CE marking	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS
							RDV-X	2	05	RBR1
							Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 05: 100W or less	Battery B: With battery (Absolute) N: None (Incremental)

- Note 1. The model with a lead of 20mm cannot select specifications with brake (vertical specifications).
 Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
 Note 3. See P.498 for DIN rail mounting bracket.
 Note 4. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	100
Repeatability (mm)	+/-0.02
Deceleration mechanism	Ball screw (Class C10)
Ball screw lead (mm)	20 12 6
Maximum speed (mm/sec)	1200 720 360
Maximum payload (kg)	12 20 40
Rated thrust (N)	84 141 283
Stroke (mm)	150 to 800 (50mm pitch)
Overall length (mm)	Stroke+286
Maximum dimensions of cross section of main unit (mm)	Stroke+316
Cable length (m)	W80 x H65
Linear guide type	Standard: 3.5 / Option: 5,10
Position detector	4 rows of circular arc grooves x 1 rail
Resolution (Pulse/rotation)	Resolvers 16384

- Note 1. Positioning repeatability in one direction.
 Note 2. When the stroke is longer than 550mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.
 Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)				Vertical installation (Unit: mm)			
	A	B	C		A	B	C		A	C	
Lead 20				Lead 20				Lead 12			
5kg	197	76	120	5kg	104	67	174	5kg	171	81	340
10kg	100	32	54	10kg	37	23	72	10kg	69	32	172
12kg	85	25	43	12kg	27	15	55	12kg	15	6	55
Lead 12				Lead 12				Lead 6			
5kg	364	89	188	5kg	171	81	340	5kg	98	99	
10kg	203	39	87	10kg	69	32	172	10kg	113	113	
15kg	139	22	51	15kg	33	15	100	15kg	69	69	
20kg	103	14	33	20kg	15	6	55	20kg	46	46	
Lead 6				Lead 6				30kg	0	0	14
10kg	403	43	113	10kg	94	36	369	40kg	0	0	0
20kg	214	16	43	20kg	25	9	157				
30kg	140	6	20	30kg	0	0	14				
40kg	113	0	8	40kg	0	0	0				

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.


Static loading moment

(Unit: N·m)			
MY	MP	MR	
70	95	110	

Controller

Controller	Operation method
SR1-X05	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221/222	
RCX240/340	
TS-X105	I/O point trace / Remote command
TS-X205	
RDV-X205-RBR1	Pulse train control

F8

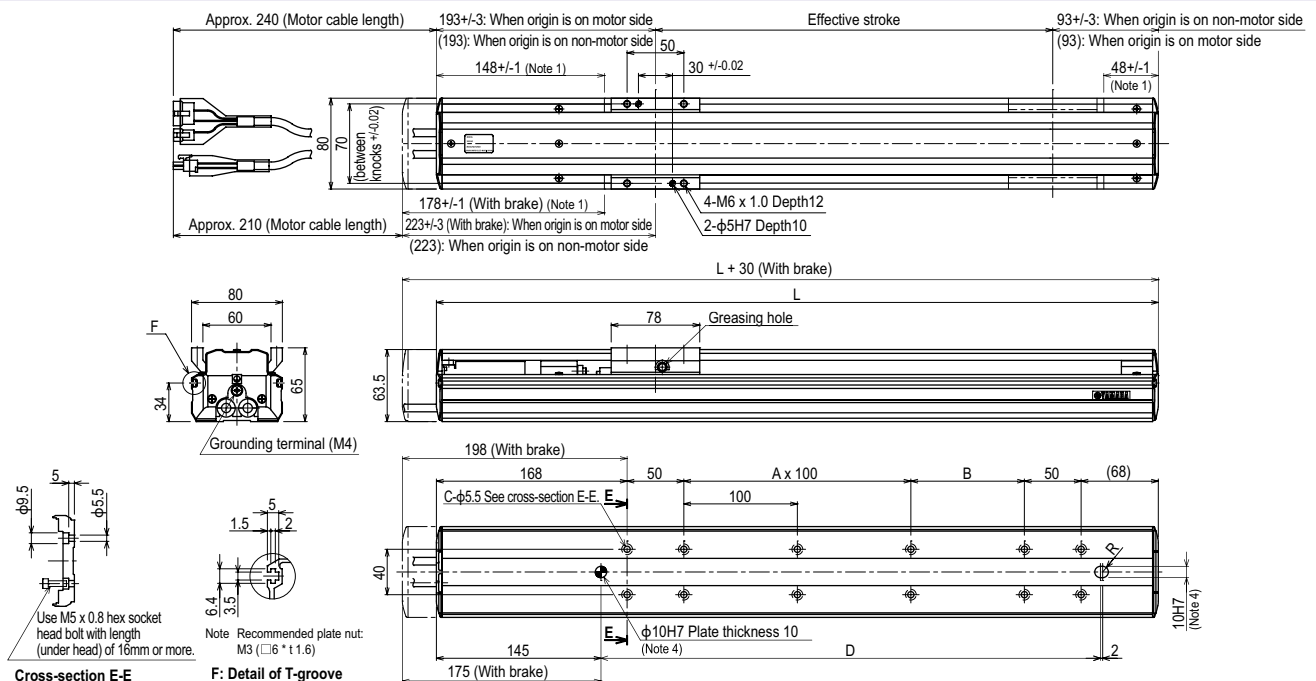

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	436	486	536	586	636	686	736	786	836	886	936	986	1036	1086
A	0	0	1	1	2	2	3	3	4	4	5	5	6	6
B	100	150	100	150	100	150	100	150	100	150	100	150	100	150
C	8	8	10	10	12	12	14	14	16	16	18	18	20	20
D	240	290	340	390	440	490	540	590	640	690	740	790	840	890
Weight (kg)	3.6	3.9	4.2	4.4	4.7	5.0	5.3	5.6	5.9	6.2	6.4	6.7	7.0	7.3
Maximum speed (mm/sec)	Lead 20	1200				1080				900	780	720	600	
	Lead 12	720				648				540	468	432	360	
	Lead 6	360				324				270	234	216	180	
	Speed setting	—				90%				75%	65%	60%	50%	

Note 6. When the stroke is longer than 550mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.

F8L

● High lead: Lead 30

● Origin on the non-motor side is selectable

Ordering method

F8L

Model	Lead designation	Brake	Origin position change	Grease type	Stroke	Cable length
	30: 30mm 20: 20mm 10: 10mm 5: 5mm	No entry: No brakes BK: Brakes provided	None: Standard Z: Non-motor side	None: Standard GC: Clean	150 to 1050 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

TSX

Positioner	Driver: Power supply voltage / Power capacity	LCD monitor	I/O selection	Battery
TS-X	105: 100V/100W or less 205: 200V/100W or less	No entry: None L: With LCD	N: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board	B: With battery (Absolute) N: None (Incremental)

SR1-X

Controller	Driver: Power capacity	Usable for CE	I/O selection	Battery
05	05: 100W or less	No entry: Standard E: CE marking	N: NPN PN: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	B: With battery (Absolute) N: None (Incremental)

RDV-X

Driver	Power supply voltage	Driver: Power capacity	Regenerative unit
2	2: AC200V	05: 100W or less	RBR1

- Note 1. The model with a lead of 30mm cannot select specifications with brake (vertical specifications).
 Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
 Note 3. See P.498 for DIN rail mounting bracket.
 Note 4. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	100
Repeatability (mm)	+/-0.01
Deceleration mechanism	Ball screw (Class C7)
Ball screw lead (mm)	30 20 10 5
Maximum speed (mm/sec)	1800 1200 600 300
Maximum payload (kg)	Horizontal 7 20 40 50 Vertical 4 8 16
Rated thrust (N)	56 84 169 339
Stroke (mm)	150 to 1050 (50mm pitch)
Overall length (mm)	Horizontal Stroke+300 Vertical Stroke+292
Maximum dimensions of cross section of main unit (mm)	W80 x H65
Cable length (m)	Standard: 3.5 / Option: 5, 10
Linear guide type	4 rows of circular arc grooves x 1 rail
Position detector	Resolvers
Resolution (Pulse/rotation)	16384

- Note 1. Positioning repeatability in one direction.
 Note 2. When the stroke is longer than 650mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
 Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang

Horizontal installation (Unit: mm)

		A	B	C
Lead 30	5kg	112	80	80
	7kg	78	43	49
	5kg	211	108	147
	10kg	116	45	69
	15kg	76	24	39
Lead 20	20kg	58	14	26
	10kg	251	56	122
	20kg	121	20	46
Lead 10	30kg	74	8	20
	40kg	35	0	6
	20kg	249	23	62
	30kg	170	10	29
	40kg	138	4	12
Lead 5	50kg	51	0	0

Wall installation (Unit: mm)

		A	B	C
Lead 30	5kg	55	57	77
	7kg	21	19	34
	5kg	119	89	176
	10kg	38	26	69
	15kg	7	0	16
Lead 20	20kg	0	0	0
	10kg	85	39	202
	20kg	7	0	30
Lead 10	30kg	0	0	0
	40kg	0	0	0
	20kg	19	7	140
	30kg	0	0	0
	40kg	0	0	0
Lead 5	50kg	0	0	0

Vertical installation (Unit: mm)

		A	C
Lead 30	2kg	236	240
	4kg	106	110
	2kg	310	311
	4kg	141	143
	6kg	85	86
Lead 20	8kg	57	58
	5kg	123	124
	10kg	47	48
Lead 10	15kg	22	22
	16kg	19	19

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.


Static loading moment

MY	MP	MR
70	95	110

Controller


Controller	Operation method
SR1-X05	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105	I/O point trace / Remote command
TS-X205	
RDV-X205-RBR1	Pulse train control

F8L

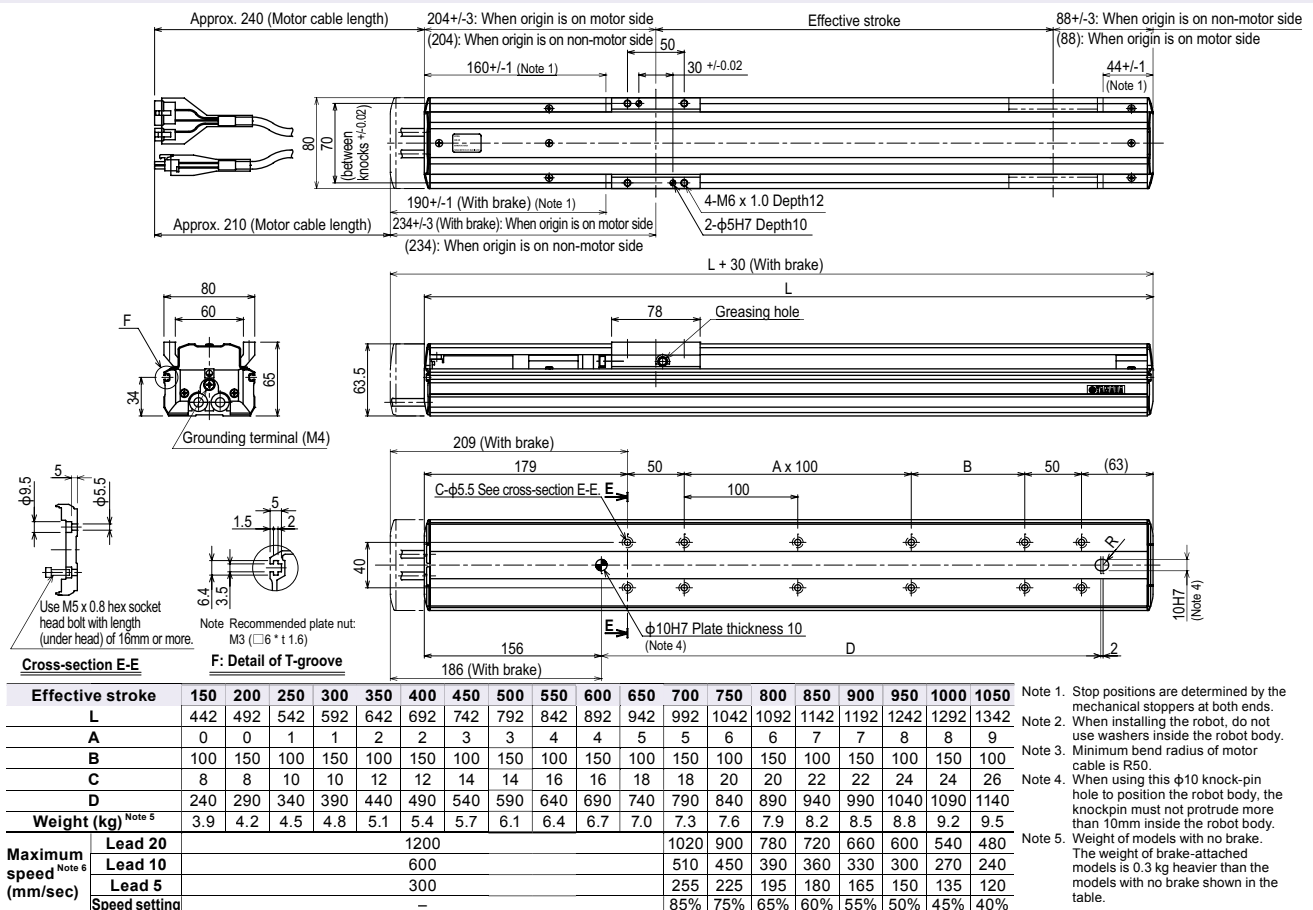

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When installing the robot, do not use washers inside the robot body.
 Note 3. Minimum bend radius of motor cable is R50.
 Note 4. When using this $\phi 10$ knock-pin hole to position the robot body, the knock-pin must not protrude more than 10mm inside the robot body.
 Note 5. Weight of models with no brake. The weight of brake-attached models is 0.3 kg heavier than the models with no brake shown in the table.
 Note 6. When the stroke is longer than 650mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.

F8L High lead type: Lead 30

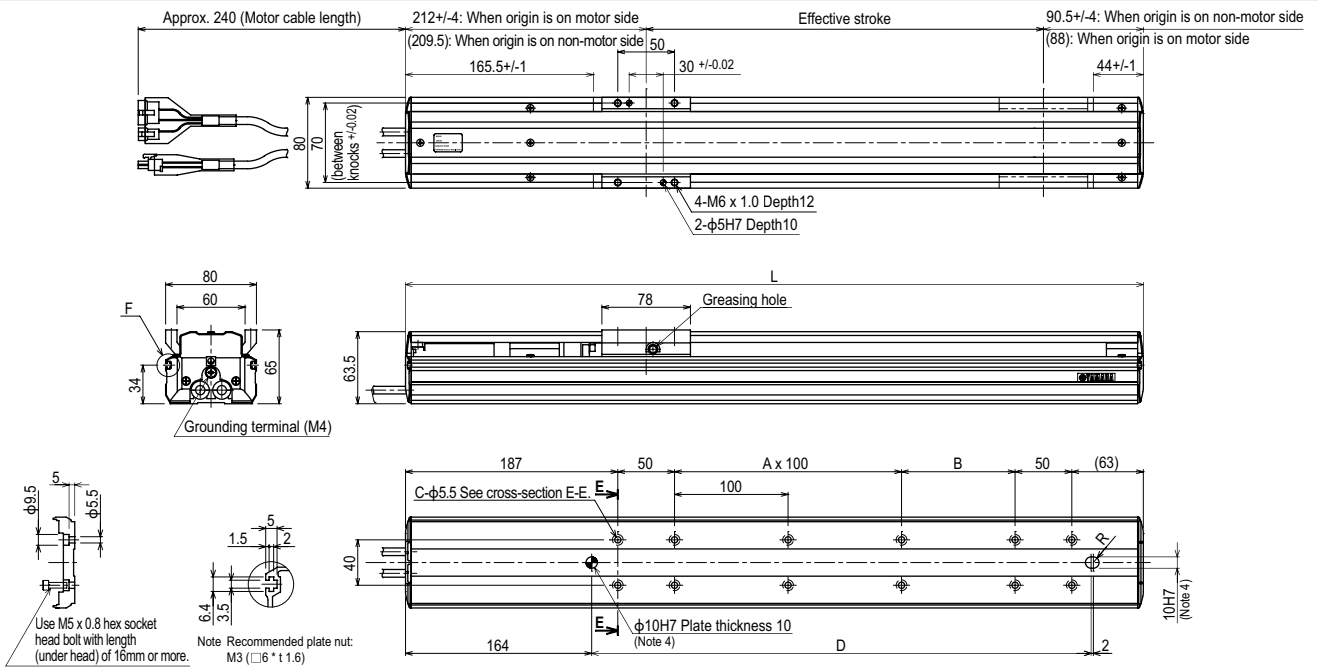

Cross-section E-E

F: Detail of T-groove

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	
L	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	
A	0	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	
B	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	
C	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	
D	240	290	340	390	440	490	540	590	640	690	740	790	840	890	940	990	1040	1090	1140	
Weight (kg)	3.9	4.2	4.5	4.8	5.1	5.4	5.7	6.1	6.4	6.7	7.0	7.3	7.6	7.9	8.2	8.5	8.8	9.2	9.5	
Maximum speed ^{Note 5} (mm/sec)	Lead 30	1800											1530	1350	1170	1080	990	900	810	720
	Speed setting	—											85%	75%	65%	60%	55%	50%	45%	40%

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When installing the robot, do not use washers inside the robot body.
 Note 3. Minimum bend radius of motor cable is R50.
 Note 4. When using this φ10 knockpin hole to position the robot body, the knockpin must not protrude more than 10mm inside the robot body.

Note 5. When the stroke is longer than 650mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.

F8LH

Origin on the non-motor side is selectable

Ordering method

F8LH						TSX							
Model	Lead designation 20: 20mm 10: 10mm 5: 5mm	Origin position change None: Standard Z: Non-motor side	Grease type None: Standard GC: Clean	Stroke 150 to 1050 (50mm pitch)	Cable length ^{Note 1} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	Positioner ^{Note 2} ITS-X	Driver: Power-supply voltage / Power capacity 105: 100V/100W or less 205: 200V/100W or less	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet TM EP: EtherNet/IP TM PT: PROFINET GW: No I/O board ^{Note 3}	Battery B: With battery (Absolute) N: None (Incremental)			
						SR1-X	05						
						Controller	Driver: Power capacity 05: 100W or less	Usable for CE No entry: Standard E: CE marking	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet TM PB: PROFIBUS	Battery B: With battery (Absolute) N: None (Incremental)			
						RDV-X	2	05	RBR1				
						Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 05: 100W or less	Regenerative unit				

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
See P.594 for details on robot cable.

Note 2. See P.498 for DIN rail mounting bracket.

Note 3. Select this selection when using the gateway function. For details, see P.60.

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
See P.594 for details on robot cable.
Note 2. See P.498 for DIN rail mounting bracket.
Note 3. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	100
Repeatability ^{Note 1} (mm)	+/-0.01
Deceleration mechanism	Ball screw (Class C7)
Ball screw lead (mm)	20 10 5
Maximum speed ^{Note 2} (mm/sec)	1200 600 300
Maximum payload (kg)	Horizontal 30 60 80
Rated thrust (N)	84 169 339
Stroke (mm)	150 to 1050 (50mm pitch)
Overall length (mm)	Horizontal Stroke+368
Maximum dimensions of cross section of main unit (mm)	W80 × H65
Cable length (m)	Standard: 3.5 / Option: 5,10
Linear guide type	4 rows of circular arc grooves × 1 rail
Position detector	Resolvers ^{Note 3}
Resolution (Pulse/rotation)	16384

Note 1. Positioning repeatability in one direction.
Note 2. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang^{Note}

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)			
	A	B	C		A	B	C
Lead 20				Lead 20			
10kg	573	256	176	10kg	147	215	515
20kg	334	116	81	20kg	53	75	255
30kg	279	70	50	30kg	20	29	160
Lead 10				Lead 10			
20kg	629	137	111	20kg	80	99	545
20kg	479	57	47	40kg	15	19	270
60kg	382	30	25	60kg	-	-	-
20kg	1094	148	127	20kg	96	112	1005
40kg	851	63	54	40kg	22	26	604
60kg	714	34	29	60kg	-	-	-
80kg	601	20	17	80kg	-	-	-

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.


Static loading moment

(Unit: N·m)		
MY	MP	MR
128	163	143

Controller

Controller	Operation method
SR1-X05	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221/222	
RCX240/340	
TS-X105	I/O point trace / Remote command
TS-X205	
RDV-X205-RBR1	Pulse train control

F8LH

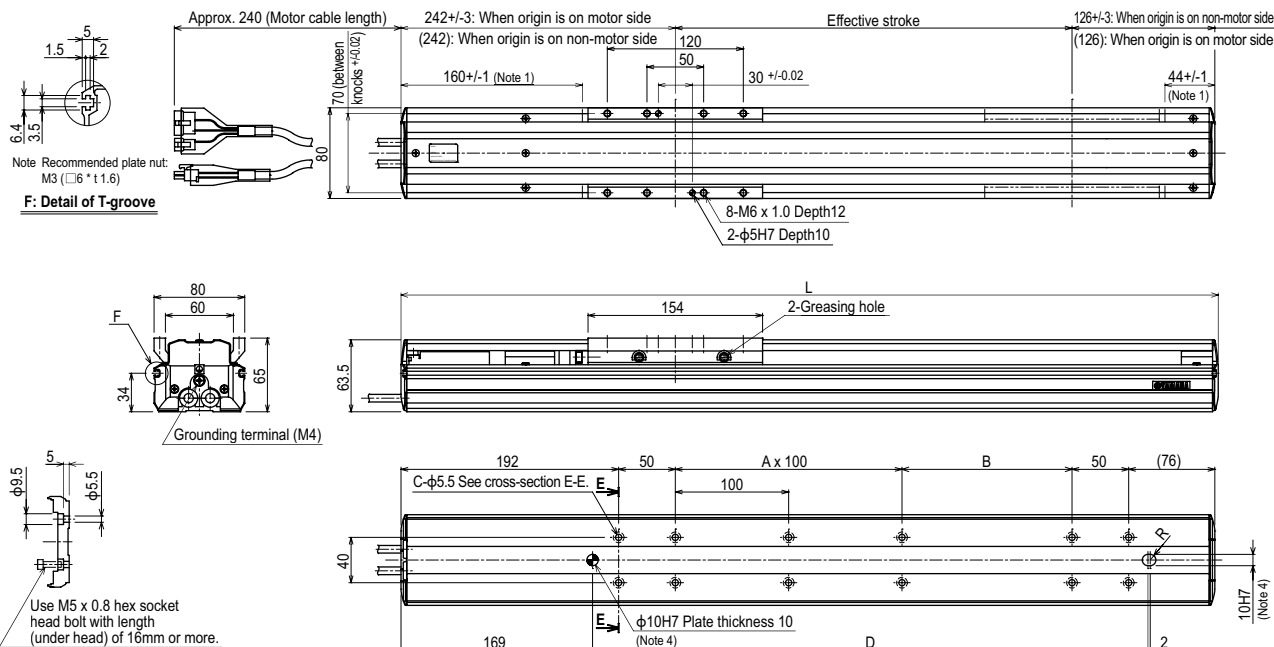


Cross-section E-E

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050										
L	518	568	618	668	718	768	818	868	918	968	1018	1068	1118	1168	1218	1268	1318	1368	1418										
A	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9										
B	150	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	150	100	150										
C	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26										
D	290	340	390	440	490	540	590	640	690	740	790	840	890	940	990	1040	1090	1140	1190										
Weight (kg)	4.7	5.0	5.3	5.6	5.9	6.2	6.6	6.9	7.2	7.5	7.8	8.1	8.4	8.7	9.0	9.3	9.7	10.0	10.3										
Maximum speed ^{Note 5} (mm/sec)	Lead 20	1200										1020										900	780	720	660	600	540	480	420
	Lead 10	600										510										450	390	360	330	300	270	240	210
	Lead 5	300										255										225	195	180	165	150	135	120	105
	Speed setting	—										85%										75%	65%	60%	55%	50%	45%	40%	35%

Note 5. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
Note 2. When installing the robot, do not use washers inside the robot body.
Note 3. Minimum bend radius of motor cable is R50.
Note 4. When using this φ10 knock-pin hole to position the robot body, the knock-pin must not protrude more than 10mm inside the robot body.

F10H High lead type: Lead 30

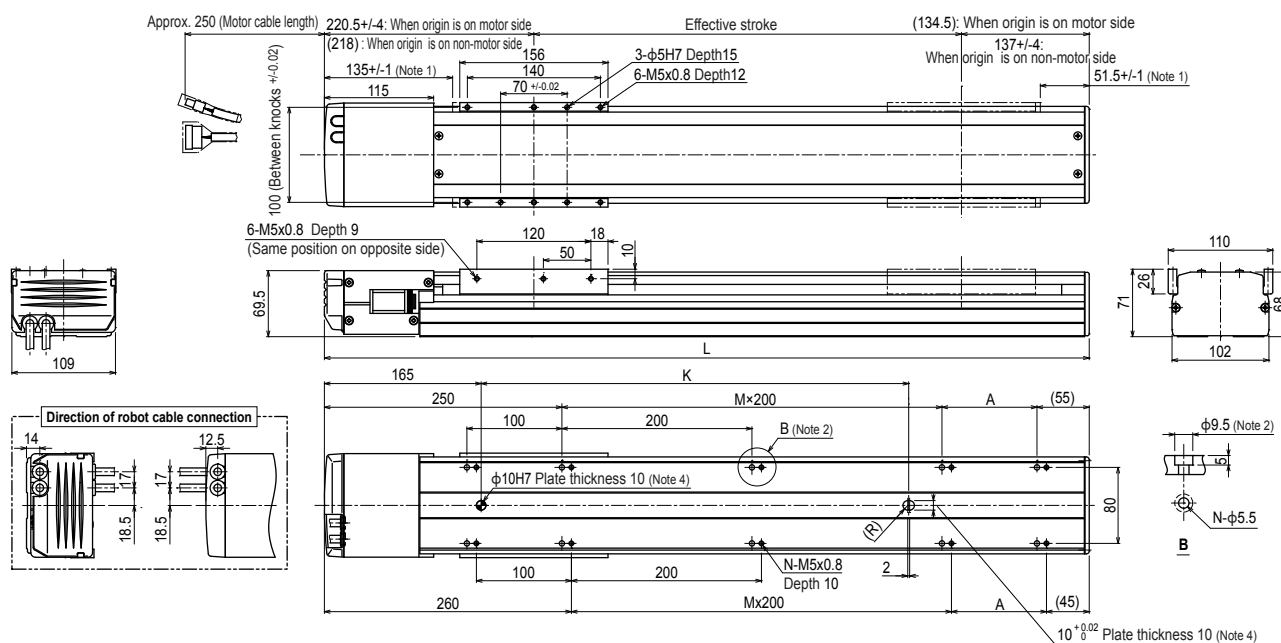

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
L	505	555	605	655	705	755	805	855	905	955	1005	1055	1105	1155	1205	1255	1305	1355
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5
N	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16
K	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
Weight (kg)	6.9	7.3	7.7	8.1	8.4	8.8	9.2	9.6	10.0	10.3	10.7	11.1	11.5	11.9	12.2	12.6	13.0	13.4
Maximum speed (mm/sec)	Lead 30	1800										1440	1260	1080	900	720	630	
	Lead 20	1200										960	840	720	600	480	420	
	Lead 10	600										480	420	360	300	240	210	
	Lead 5	300										240	210	180	150	120	105	
	Speed setting	—										80%	70%	60%	50%	40%	35%	

Note 5. When the stroke is longer than 600mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.

F14

● High lead: Lead 30

● Origin on the non-motor side is selectable

Note. Strokes longer than 1050mm are special order items. Please consult us for delivery time.

Ordering method

F14

Model	Lead designation	Brake ^{Note 1}	Cable entry location	Origin position change	Grease type	Stroke	Cable length ^{Note 2}
	30: 30mm 20: 20mm 10: 10mm 5: 5mm	No entry: No brakes BK: Brakes provided	No entry: Standard (S) U: From the top R: From the right L: From the left	None: Standard Z: Non-motor side	None: Standard GC: Clean	Lead 20: 10-5: 150 to 1050 (50mm pitch) Lead 30: 150 to 1250 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K: (Flexible cable)

TSX

Positioner ^{Note 3}	Driver: Power supply voltage	Regenerative unit	LCD monitor	I/O selection	Battery
TS-X	Power capacity 105: 100V/100W or less 205: 200V/100W or less	No entry: None R: With RGT	No entry: None L: With LCD	NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 4}	B: With battery (Absolute) N: None (Incremental)

SR1-X

Controller	Driver: Power capacity	Usable for CE	Regenerative unit	I/O selection	Battery
05	05: 100W or less	No entry: Standard E: CE marking	No entry: None R: With RGT	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	B: With battery (Absolute) N: None (Incremental)

RDV-X

Driver	Power supply voltage	Driver: Power capacity	Regenerative unit
2	2: AC200V	05: 100W or less	

- Note 1. The model with a lead of 30mm cannot select specifications with brake (vertical specifications).
 Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
 Note 3. See P.498 for DIN rail mounting bracket.
 Note 4. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	100
Repeatability ^{Note 1} (mm)	+/-0.01
Deceleration mechanism	Ball screw (Class C7)
Ball screw lead (mm)	30 20 10 5
Maximum speed ^{Note 2} (mm/sec)	1800 1200 600 300
Maximum payload (kg)	Horizontal 15 30 55 80 Vertical 4 10 20
Rated thrust (N)	56 84 169 339
Stroke (mm)	150 to 1250 ^{Note 3} (50mm pitch)
Overall length (mm)	Horizontal Stroke+255 Vertical Stroke+285
Maximum dimensions of cross section of main unit (mm)	W136 x H83
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves x 2 rail
Position detector	Resolvers ^{Note 4}
Resolution (Pulse/rotation)	16384

- Note 1. Positioning repeatability in one direction.
 Note 2. When the stroke is longer than 700mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
 Note 3. Strokes longer than 1050mm are available only for high lead (Lead 30). (Special order item)
 Note 4. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang^{Note}

	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A C
Horizontal installation			
Lead 30	5kg 1756 1364 863 15kg 1236 467 438 30kg 1266 245 294	5kg 951 969 1286 15kg 408 277 803 30kg 219 105 678	Lead 20 1kg 600 600 2kg 1200 1200 4kg 1154 895 Lead 10 4kg 1232 956 8kg 634 492 10kg 499 387 10kg 587 456 15kg 383 297 20kg 281 218
Lead 20	5kg 2153 1366 980 15kg 1193 465 430 30kg 1266 245 294	5kg 1066 974 1578 15kg 402 276 775 30kg 219 105 678	
Lead 10	5kg 1193 465 430 20kg 1132 353 361 40kg 872 183 218 55kg 946 140 184 50kg 1575 158 222 60kg 1493 135 194 80kg 1466 107 159	5kg 92 0 345 30kg 246 107 1095 40kg 167 64 798 60kg 88 20 508	
Lead 5	5kg 1575 158 222 60kg 1493 135 194 80kg 1466 107 159		

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment


	MY	MP	MR
(Unit: N·m)	232	233	204

Controller

Controller	Operation method
SR1-X05 ^{Note} RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105 ^{Note} TS-X205 ^{Note} RDV-X05-RBR1	I/O point trace / Remote command / Pulse train control

Note. Regenerative unit is required when the models used vertically and with 700mm or larger stroke.

F14

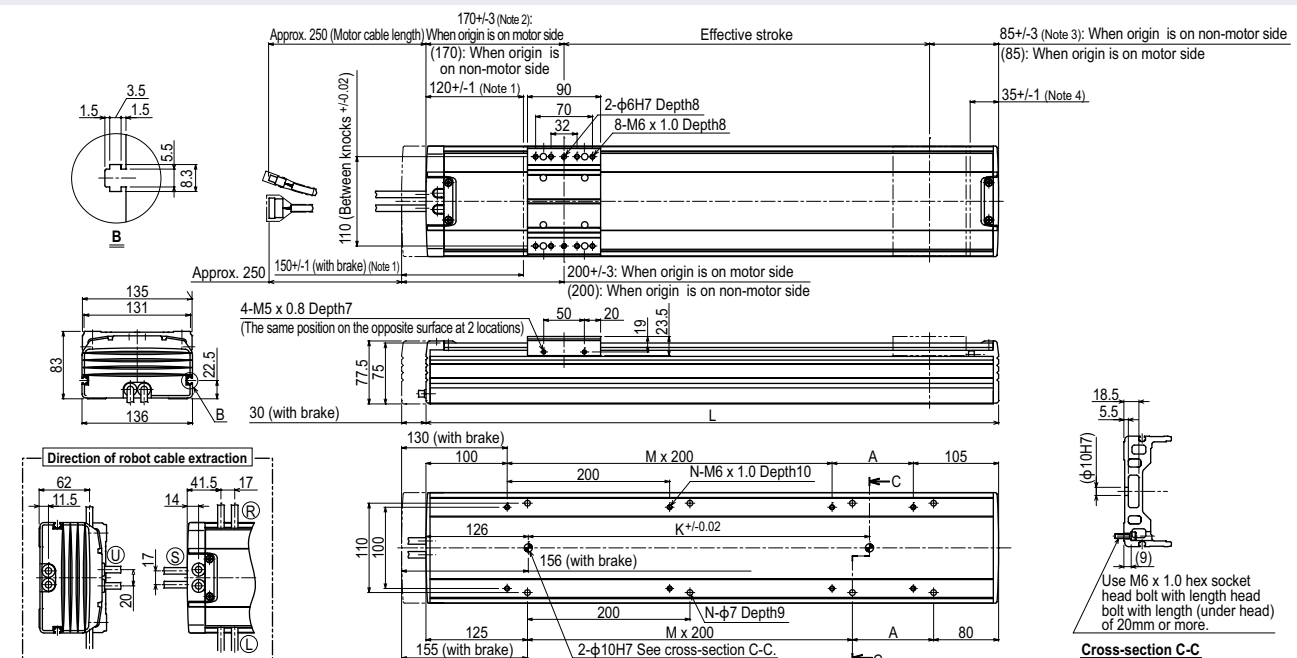

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. 172.5+/-4 when the high lead specification (Lead 30) is used.
 Note 3. 85+/-4 when the high lead specification (Lead 30) is used.
 Note 4. 32.5+/-1 when the high lead specification (Lead 30) is used.
 Note 5. Minimum bend radius of motor cable is R50.
 Note 6. Weight of models with no brake. The weight of brake-attached models is 0.7 kg heavier than the models with no brake shown in the table.

Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100 ^{Note 8}	1150 ^{Note 8}	1200 ^{Note 8}	1250 ^{Note 8}
L	405	455	505	555	605	655	705	755	805	855	905	955	1005	1055	1105	1155	1205	1255	1305	1355	1405	1455	1505
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100
M	0	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6
N	4	6	6	6	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	16	16	16
K	240	240	240	240	420	420	420	420	600	600	600	600	780	780	780	780	960	960	960	960	1140	1140	1140
Weight (kg) ^{Note 6}	6.2	6.9	7.5	8.2	8.8	9.5	10.1	10.8	11.4	12.1	12.6	13.4	13.9	14.6	15.2	15.9	16.5	17.2	17.8	18.5	19.1	19.8	20.4
Maximum speed ^{Note 7} (mm/sec)	Lead 30 1800	Lead 20 1200	Lead 10 600	Lead 5 300																			
Speed setting	80%	65%	50%	45%																			

- Note 7. When the stroke is longer than 700mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.
 Note 8. Strokes longer than 1050mm are special order items. Please contact us for speed setting.

F14H

● High lead: Lead 30

● Origin on the non-motor side is selectable: Lead 10-20-30

Note. Strokes longer than 1050mm are special order items. Please consult us for delivery time.

Ordering method

F14H

Model	Lead designation	Brake	Cable entry location	Origin position change	Grease type	Stroke	Cable length
	30: 30mm 20: 20mm 10: 10mm 5: 5mm	No entry: No brakes BK: Brakes provided	No entry: Standard (S) U: From the top R: From the right L: From the left	None: Standard Z: Non-motor side	None: Standard GC: Clean	Lead 20-10-5: 150 to 1050 (50mm pitch) Lead 30: 150 to 1250 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

- Note 1. The model with a lead of 30mm cannot select specifications with brake (vertical specifications).
 Note 2. If selecting 5mm lead specifications then the origin point cannot be changed to the non-motor side.
 Note 3. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
 Note 4. See P.498 for DIN rail mounting bracket.
 Note 5. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	200
Repeatability (mm)	+/-0.01
Deceleration mechanism	Ball screw (Class C7)
Ball screw lead (mm)	30 20 10 5
Maximum speed (mm/sec)	1800 1200 600 300
Maximum payload (kg)	Horizontal: 25 40 80 100 Vertical: - 8 20 30
Rated thrust (N)	113 170 341 683
Stroke (mm)	150 to 1250 (50mm pitch) Stroke+320 Stroke+350
Overall length (mm)	Horizontal: W136 x H83 Vertical: W136 x H83
Maximum dimensions of cross section of main unit (mm)	Standard: 3.5 / Option: 5.10
Cable length (m)	4 rows of circular arc grooves x 2 rail
Linear guide type	Resolvers
Position detector	Resolvers
Resolution (Pulse/rotation)	16384

- Note 1. Positioning repeatability in one direction.
 Note 2. When the stroke is longer than 700mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
 Note 3. Strokes longer than 1050mm are available only for high lead (Lead 30). (Special order item)
 Note 4. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang

Installation	Unit: (mm)	A	B	C
Horizontal installation				
Lead 30	10kg	2152	1673	934
25kg	1847	691	533	
Lead 20	10kg	2265	1674	961
20kg	1402	855	537	
40kg	1047	445	324	
Lead 10	30kg	1953	583	485
50kg	1655	365	328	
80kg	1720	242	238	
60kg	2443	311	317	
Lead 5	80kg	2193	242	253
100kg	2000	202	214	
Wall installation				
Lead 30	10kg	975	1219	1625
25kg	482	426	1257	
Lead 20	10kg	999	1220	1711
20kg	515	558	987	
40kg	263	227	635	
Lead 10	30kg	419	338	1282
50kg	240	162	934	
80kg	134	62	756	
60kg	209	117	1398	
Lead 5	80kg	135	62	1120
100kg	90	29	900	
Vertical installation				
Lead 20	4kg	2400	2016	
6kg	1699	1364		
8kg	1301	1051		
Lead 10	10kg	1370	1106	
15kg	906	732		
Lead 5	20kg	678	548	
25kg	612	494		
30kg	503	407		

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment


Unit: (N·m)	MY	MP	MR
551	552	485	

Controller

Controller	Operation method
SR1-X10	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X221/222	I/O point trace / Remote command
TS-X210	Pulse train control
RDV-X210-RBR1	

Note. When using the unit vertically, a regeneration unit is required.

F14H

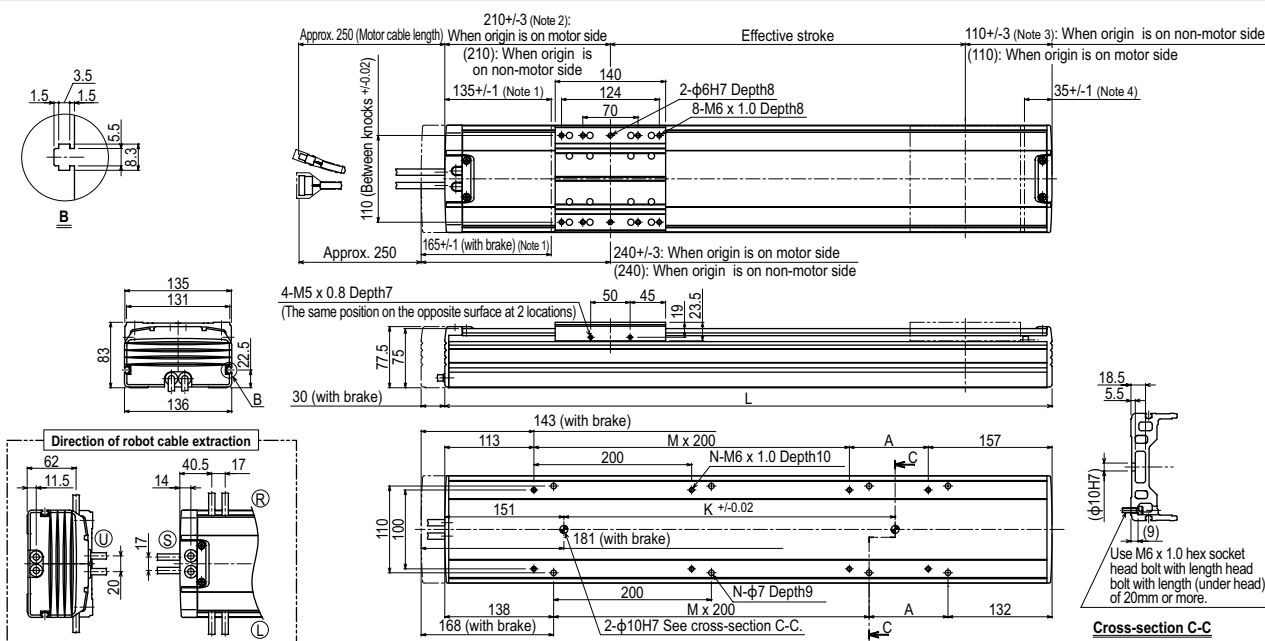

Note 1. Stop positions are determined by the mechanical stoppers at both ends.	Note 4. 32.5±1 when the high lead specification (Lead 30) is used.
Note 2. 212.5±4 when the high lead specification (Lead 30) is used.	Note 5. Minimum bend radius of motor cable is R50.
Note 3. 110±4 when the high lead specification (Lead 30) is used.	Note 6. Weight of models with no brake. The weight of brake-attached models is 0.7 kg heavier than the models with no brake shown in the table.
Effective stroke	150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000 1050 1100 1150 1200 1250
L	470 520 570 620 670 720 770 820 870 920 970 1020 1070 1120 1170 1220 1270 1320 1370 1420 1470 1520 1570
A	200 50 100 150 200 50 100 150 200 50 100 150 200 50 100 150 200 50 100 150 200 50
M	0 1 1 1 1 2 2 2 2 3 3 3 3 4 4 4 5 5 5 5 5 5
N	4 6 6 6 6 8 8 8 8 10 10 10 12 12 12 12 14 14 14 14 16 16
K	240 240 240 420 420 420 600 600 600 600 780 780 960 960 960 960 1140 1140 1140 1140 1320 1320
Weight (kg)	7.5 8.2 8.8 9.5 10.1 10.8 11.4 12.1 12.7 13.4 13.9 14.6 15.2 15.9 16.5 17.2 17.8 18.5 19.1 19.8 20.4 21.1 21.7
Lead 30	1800
Lead 20	1200
Lead 10	600
Lead 5	300
Speed setting	80% 65% 50% 45%

- Note 7. When the stroke is longer than 700mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.
 Note 8. Strokes longer than 1050mm are special order items. Please contact us for speed setting.

Controller

SR1-X ▶ 516

TS-X ▶ 490

RDV-X ▶ 504

GF14XL

● Origin on the non-motor side is selectable

Note. If you need an installation posture other than the horizontal installation, please contact us.

Ordering method

GF14XL - S H - 20

Model	Model	Installation direction	Lead designation	Cable entry location	Origin position change	Frame	Grease type	Stroke	Cable length	TSX	SR1-X	RDV-X	Battery
S: Straight model	H: Horizontal installation	L: From the left	U: From the top R: From the right L: From the left	No entry: Standard (S) U: From the top R: From the right L: From the left	None: Standard Z: Non-motor side	No entry: Standard (Spot facing) T: Tapping	None: Standard GC: Clean	750 to 2000 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	Positioner TS-X Driver: Power-supply voltage 110: 100V/200W 210: 200V/200W LCD monitor No entry: L: With LCD I/O selection N: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board	Controller 10: 200W Driver: Power capacity 10: 200W Usable for CE No entry: Standard E: CE marking I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	20: 600W or less Regenerative unit	Battery B: With battery (Absolute) N: None (Incremental)

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.

See P.594 for details on robot cable.

Note 2. See P.498 for DIN rail mounting bracket.

Note 3. Select this selection when using the gateway function. For details, see P.60.

[Cautions after purchase]

- When changing the origin position, contact us since the adjustment is needed.
- When changing the cable entry location, contact us since necessary parts may vary depending on the cable entry location.
- Do not install the robot with the horizontal installation specifications in a direction other than the horizontal direction.


Specifications

AC servo motor output (W)	200
Repeatability ^{Note 1} (mm)	+/-0.01
Deceleration mechanism	Ball screw φ15 (Class C7)
Ball screw lead (mm)	20
Maximum speed (mm/sec)	1200
Maximum payload (kg)	45
Rated thrust (N)	170
Stroke (mm)	750 to 2000 (50mm pitch)
Overall length (mm)	Stroke+561
Maximum dimensions of cross section of main unit (mm)	W140×H91.5
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves × 2 rail
Position detector	Resolvers ^{Note 2}
Resolution (Pulse/rotation)	20480

Note 1. Positioning repeatability in one direction.

Note 2. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang^{Note}




Horizontal installation (Unit: mm)	A	B	C
Lead 20	3550	1340	1210
20kg	2075	685	633
45kg	1280	326	308

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 1000mm stroke models.

Static loading moment




(Unit: N·m)	MY	MP	MR
	551	552	485

Controller

Controller	Operation method
SR1-X10	Programming / I/O point trace / Remote command / Operation using RS-232C communication
RCX221/222	I/O point trace / Remote command
RCX240/340	Pulse train control
TS-X110	
TS-X210	
RDV-X220-RBR1	

GF14XL

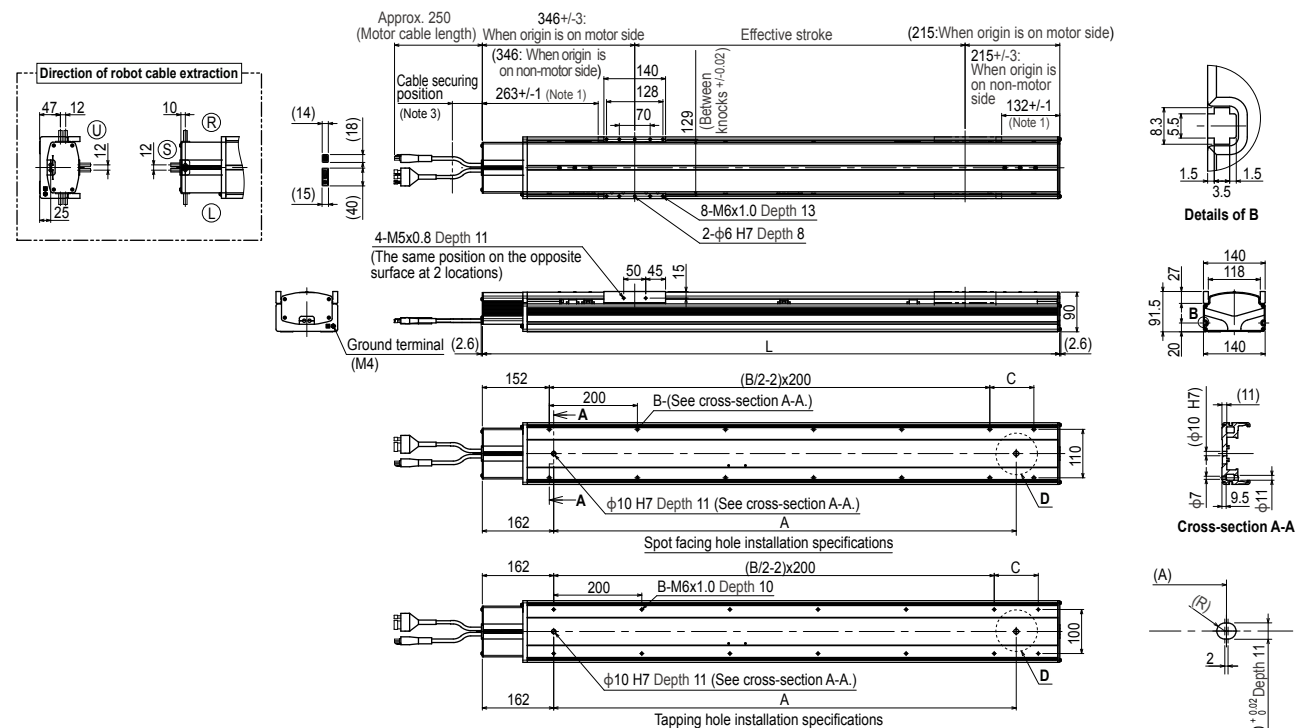

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. When changing the return-to-origin direction, the adjustment is needed. (The standard is the origin on the motor side.)

Note 3. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.

Note 4. The cable's minimum bend radius is R30.

Note 5. The length under head of the hexagonal socket head bolts (M6 x 1.0) that are used to install the main body with the spot facing hole installation specifications is 20mm or more.

It is recommended that the length under head of the hexagonal socket head bolts (M6 x 1.0) that are used to install the main body with the tapping hole installation specifications is the thickness of the installation base + 10mm or less.

Effective stroke	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000
L	1311	1361	1411	1461	1511	1561	1611	1661	1711	1761	1811	1861	1911	1961	2011	2061	2111	2161	2211	2261	2311	2361	2411	2461	2511	2561
A	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300
B	14	14	14	16	16	16	16	18	18	18	18	20	20	20	20	22	22	22	22	24	24	24	24	26	26	26
C	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
Weight (kg)	22.5	23.2	23.8	24.5	25.2	25.9	26.5	27.2	27.9	28.6	29.2	29.9	30.6	31.3	31.9	32.6	33.3	33.9	34.6	35.3	36.0	36.6	37.3	38.0	38.7	39.3

F17

- High lead: Lead 40
- Origin on the non-motor side is selectable

Note. Upper robot cable (U) on models with brakes is a special order item, so please consult our sales office or sales representative for assistance.
(External dimensions: overall length + 20 mm)

Ordering method

F17

Model	Lead designation	Brake	Cable entry location	Origin position change	Grease type	Stroke	Cable length
	40: 40mm 20: 20mm 10: 10mm	No entry: No brakes BK: Brakes provided	No entry: Standard (S) U: From the top R: From the right L: From the left	None: Standard Z: Non-motor side	None: Standard GC: Clean	Lead 20: 10: 200 to 1250 (50mm pitch) Lead 40: 200 to 1450 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

- Note 1. The model with a lead of 40mm cannot select specifications with brake (vertical specifications).
Note 2. Upper robot cable (U) on models equipped with brake is a special-order item.
Note 3. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
Note 4. See P.498 for DIN rail mounting bracket.
Note 5. The robot with the high lead specifications (lead 40) needs a regenerative unit.
Note 6. Select this selection when using the gateway function. For details, see P.60.

TSX	220				
Positioner TS-X	Driver: Power-supply voltage Power capacity 220: 200V/400 to 600W	Regenerative unit No entry: None R: With RGT	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board	Battery N: None (Incremental)
SR1-X	20				
Controller	Driver: Power capacity 20: 400 to 600W	Usable for CE No entry: Standard E: CE marking	Regenerative unit No entry: None R: With RG1	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	Battery B: With battery (Absolute) N: None (Incremental)
RDV-X	2	20			
Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 20: 600W or less	Regenerative unit RBR1 (Horizontal) RBR2 (Vertical)		

Specifications

AC servo motor output (W)	400
Repeatability (mm)	+/-0.01
Deceleration mechanism	Ball screw (Class C7)
Ball screw lead (mm)	40 20 10
Maximum speed (mm/sec)	2400 1000 (1200) 600
Maximum payload (kg)	Horizontal 40 80 120 Vertical 15 35
Rated thrust (N)	169 339 678
Stroke (mm)	200 to 1450 (50mm pitch)
Overall length (mm)	Horizontal Stroke+375 Stroke+365 Vertical -
Maximum dimensions of cross section of main unit (mm)	W168 x H100
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves x 2 rail
Position detector	Resolvers
Resolution (Pulse/rotation)	16384

- Note 1. Repeatability for single oscillation.
Note 2. When the stroke exceeds 800mm, although depending on the moving range, the ball screw may resonate (critical speed). In that case, make adjustment to lower the speed on the program using the maximum speed given in the below table as a guide.
Note 3. To operate the unit at a speed exceeding 1,000mm/sec. (Max. speed), a regeneration unit RG1 is required.
Note 4. Longer than 1250mm stroke can be handled by the high lead specification (Lead 40) only.
Note 5. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang

	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
	A B C	A B C	A B C
Lead 40	10kg 3540 2753 1999 20kg 2541 1357 1181 40kg 2639 661 736	10kg 2022 2670 3501 20kg 1202 1283 2483 40kg 752 587 2516	Lead 20 5kg 3000 3000 10kg 2447 2447 15kg 1650 1650 Lead 10 15kg 1782 1782 25kg 1054 1054 35kg 742 742
Lead 20	30kg 2647 894 989 50kg 1770 521 588 80kg 1391 312 362 60kg 2443 430 572 100kg 2000 243 326 120kg 1841 197 264	Lead 20 30kg 987 820 2578 50kg 574 447 1685 80kg 342 237 1263 60kg 535 355 2443 100kg 283 169 2000 120kg 220 123 1841	


Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment

	MY	MP	MR
	1032	1034	908
Controller			
Controller	Operation method		
SR1-X20	Programming / I/O point trace / Remote command / Operation using RS-232C communication		
RCX221/222			
RCX240/340			
TS-X220	I/O point trace / Remote command		
RDV-X220-RBR1 (Horizontal)			
RDV-X220-RBR2 (Vertical)			
	Pulse train control		

Note. When using the vertical model, if the unit is operated at such speed exceeding the maximum speed of 1,000mm/sec., and if it has a high lead (40), a regeneration unit is required.


F17

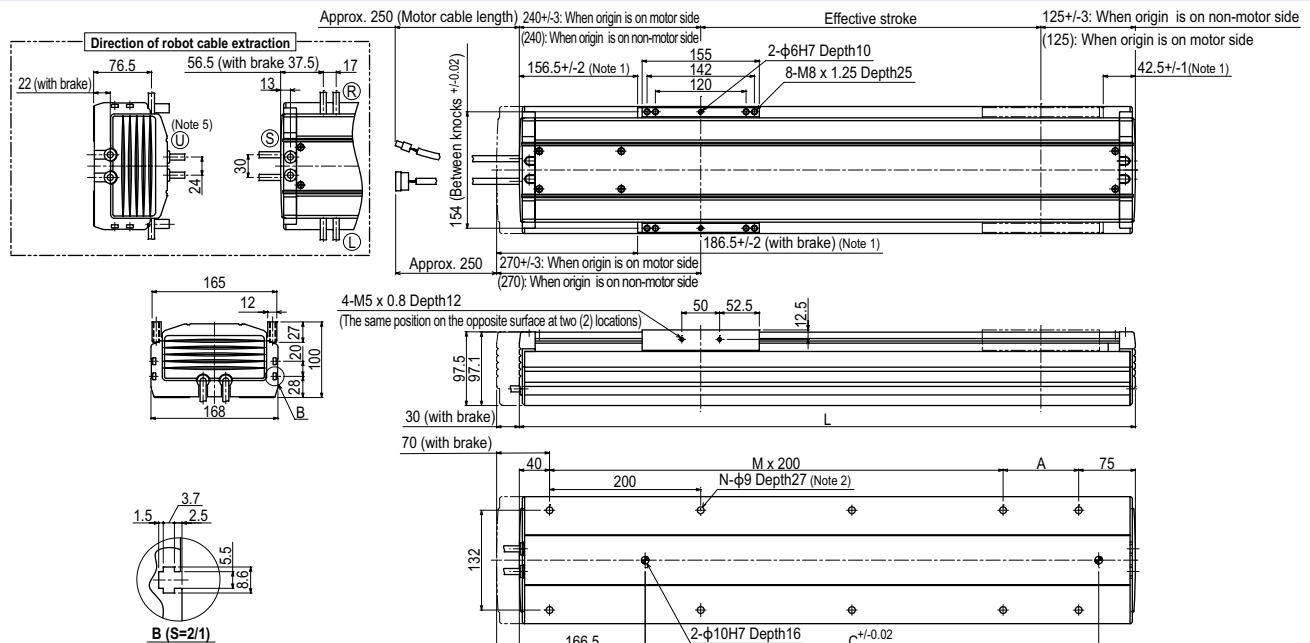

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
Note 2. When installing the robot, do not use washers inside the robot body.
Note 3. Minimum bend radius of motor cable is R50.
Note 4. Weight of models with no brake. The weight of brake-attached models is 1.2 kg heavier than the models with no brake shown in the table.
Note 5. Make a separate consultation with us regarding robot cable (brake specifications) U extraction. (External dimensions: overall length + 20 mm)
Note 6. When the stroke is longer than 800mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.
Note 7. To operate the unit at a speed exceeding 1,000mm/sec. (Max. speed), a regeneration unit RG1 is required.

Effective stroke	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	1000	1050	1100	1150	1200	1250
L	565	615	665	715	765	815	865	915	965	1015	1065	1115	1165	1215	1265	1315	1365	1415	1465	1515	1565
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50
M	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	6	6	6	6	7	7
N	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	16	16	16	16	18	18
C	240	240	420	420	420	600	600	600	600	780	780	780	780	960	960	960	1140	1140	1140	1140	1320
Weight (kg)	14.5	15.3	16.2	17.0	17.8	18.6	19.5	20.3	21.1	21.9	22.8	23.6	24.4	25.2	26.1	26.9	27.7	28.5	29.4	30.2	31.0
Maximum speed	1000 (1200)															960	840	720	600	480	480
Lead 20	600															480	420	360	300	240	240
Lead 10	-															80%	70%	60%	50%	40%	40%

F17 High lead type: Lead 40

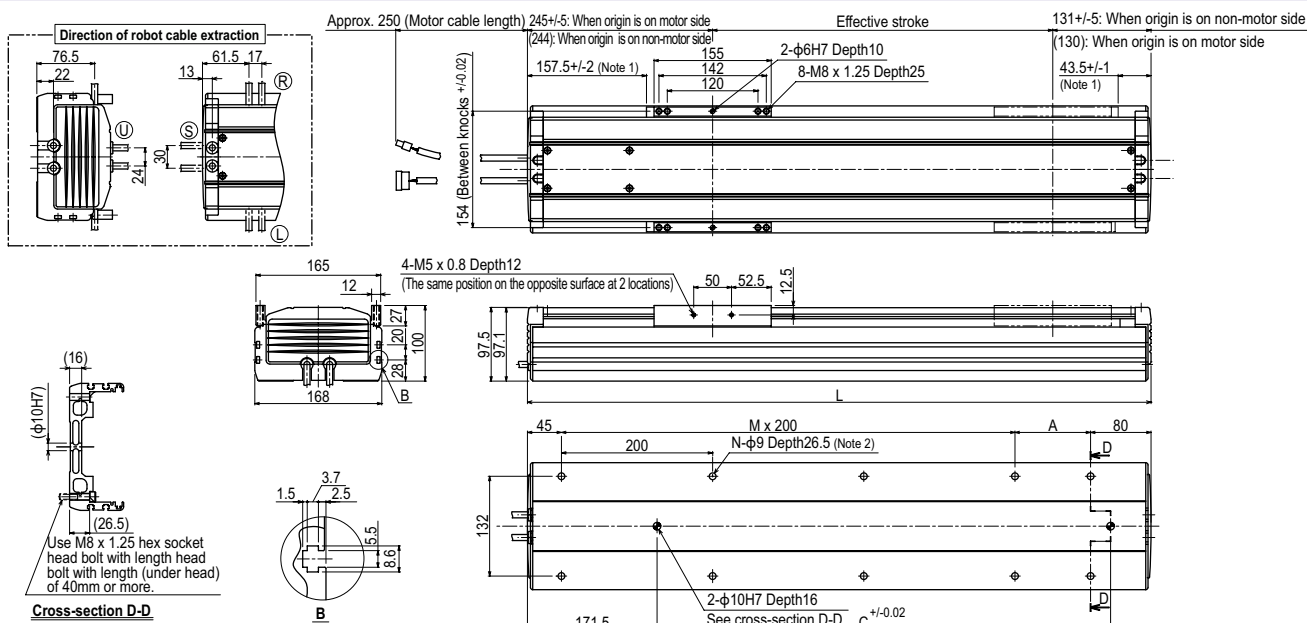

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When installing the robot, do not use washers inside the robot body.

Note 3. Minimum bend radius of motor cable is R50.

Note 2: When installing the robot, do not use washers inside the robot body.																													
Effective stroke		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450		
	L	575	625	675	725	775	825	875	925	975	1025	1075	1125	1175	1225	1275	1325	1375	1425	1475	1525	1575	1625	1675	1725	1775	1825		
	A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100		
	M	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8		
	N	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20		
	C	240	240	420	420	420	600	600	600	600	780	780	780	780	960	960	960	960	1140	1140	1140	1140	1320	1320	1320	1320	1320		
	Weight (kg)	14.7	15.5	16.4	17.2	18.0	18.8	19.7	20.5	21.3	22.1	23.0	23.8	24.6	25.4	26.3	27.1	27.9	28.7	29.6	30.4	31.2	32.0	32.8	33.6	34.4	35.2		
Maximum speed (mm/sec)	Lead 40	2400													1920			1680		1440		1200		960		840		720	
	Speed setting	—													80%			70%		60%		50%		40%		35%		30%	

Note 4. When the stroke is longer than 800mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.

F17L

● Origin on the non-motor side is selectable

Note. Upper robot cable (U) on models with brakes is a special order item, so please consult our sales office or sales representative for assistance.
(External dimensions: overall length + 20 mm)

Ordering method

F17L- 50

Model	Lead designation	Brake	Cable entry location	Origin position change	Grease type	Stroke	Cable length
		No entry: No brakes BK: Brakes provided	No entry: Standard (S) U: From the top R: From the right L: From the left	None: Standard Z: Non-motor side	None: Standard GC: Clean	1100 to 2050 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

TSX	220	R	I/O selection	Battery
Positioner TS-X	Driver: Power-supply voltage Power capacity 220: 200V/400 to 600W	Regenerative unit R: With RGT	No entry: None L: With LCD	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board
SR1-X	20	R	I/O selection	Battery
Controller	Driver: Power capacity 20: 400 to 600W	Usable for CE No entry: Standard E: CE marking	Regenerative unit R: With RG1	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS
RDV-X	2	20	Regenerative unit	Battery
Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 20: 600W or less	RBR1 (Horizontal) RBR2 (Vertical)	B: With battery (Absolute) N: None (Incremental)

- Note 1. Upper robot cable (U) on models equipped with brake is a special-order item.
Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
See P.594 for details on robot cable.
Note 3. See P.498 for DIN rail mounting bracket.
Note 4. Acceleration / deceleration is different depending the Positioner or Controller or Driver.
Note 5. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	600
Repeatability (mm)	+/-0.02
Deceleration mechanism	Ball screw (Class C10)
Ball screw lead (mm)	50
Maximum speed (mm/sec)	2200
Maximum payload (kg)	Horizontal 50 Vertical 10
Rated thrust (N)	204
Stroke (mm)	1100 to 2050 (50mm pitch)
Overall length (mm)	Horizontal Stroke+475 Vertical Stroke+505
Maximum dimensions of cross section of main unit (mm)	W168 x H100
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves x 2 rail
Position detector	Resolvers
Resolution (Pulse/rotation)	16384

- Note 1. Positioning repeatability in one direction.
Note 2. When the stroke is longer than 1200mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below.
Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang

	Horizontal installation (Unit: mm)	Wall installation (Unit: mm)	Vertical installation (Unit: mm)
Lead 50	A B C 10kg 4000 2755 2608 30kg 3045 895 1175 50kg 2602 523 715	A B C 10kg 2720 2681 4000 30kg 1185 821 3045 50kg 680 449 2602	A C 2kg 1200 1200 5kg 3000 3000 10kg 2650 2650

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.


Static loading moment

	MY	MP	MR
(Unit: N·m)	1032	1034	908

Controller

Controller	Operation method
SR1-X20-R RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X220-R	I/O point trace / Remote command
RDV-X220-RBR1 (Horizontal) RDV-X220-RBR2 (Vertical)	Pulse train control

F17L

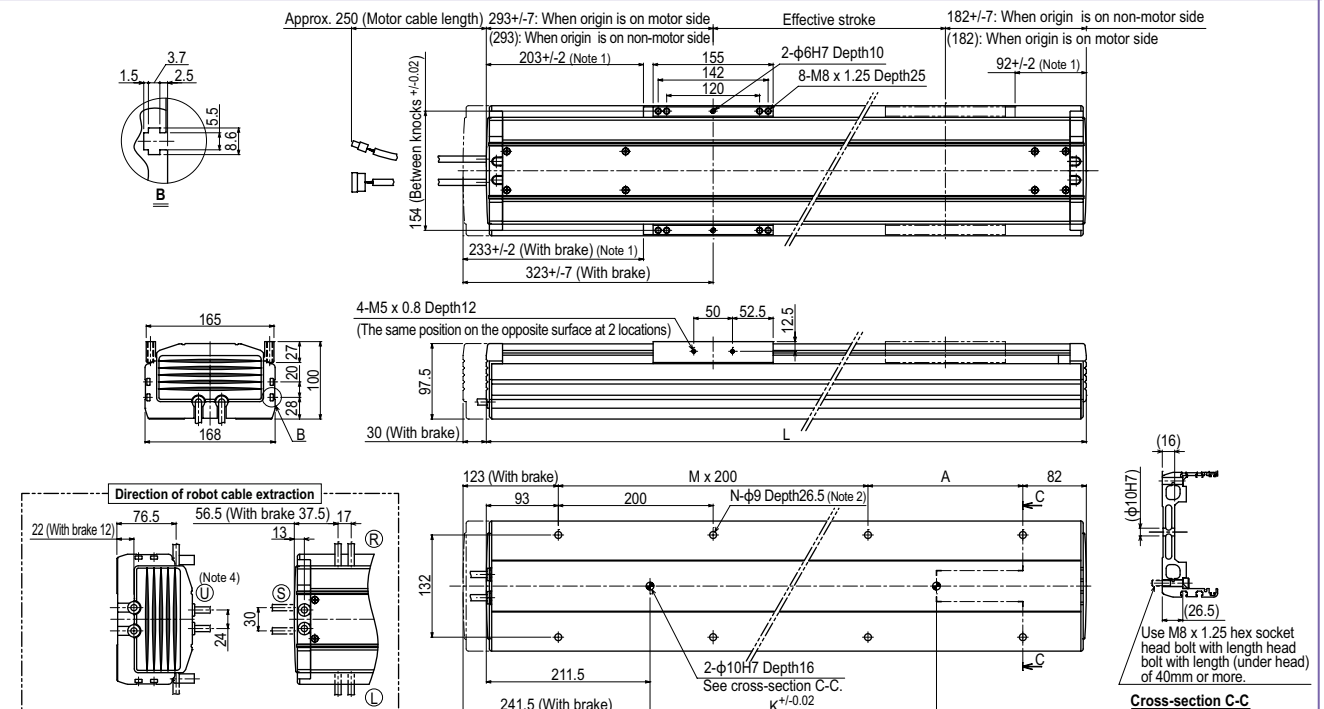

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
Note 2. It is not allowed to use a counter bore washer, etc. when installing the main unit.
Note 3. This is the weight of the model without a brake. The weight of the model equipped with a brake is 1.2kg heavier than this value.
Note 4. Make a separate consultation with us regarding robot cable (brake specifications) U extraction. (External dimensions: overall length + 20 mm)

Effective stroke	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050
L	1575	1625	1675	1725	1775	1825	1875	1925	1975	2025	2075	2125	2175	2225	2275	2325	2375	2425	2475	2525
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150
M	6	7	7	7	7	8	8	8	8	9	9	9	9	10	10	10	10	11	11	11
N	16	18	18	18	18	20	20	20	20	22	22	22	22	24	24	24	24	26	26	26
K	1140	1140	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320
Weight (kg)	34.1	34.9	35.8	36.7	37.6	38.4	39.3	40.2	41.1	42	42.9	43.8	44.7	45.6	46.5	47.3	48.2	49.1	50	50.9
Maximum speed (mm/sec)	2200				1900				1500				1200				900			
Speed setting	-				86%				68%				54%				40%			

Note 5. When the stroke exceeds 1200mm, although depending on the moving range, the ball screw may resonate (critical speed). In that case, make adjustment to lower the speed on the program using the maximum speed given in the above table as a guide.

F20

- High lead: Lead 40
- Origin on the non-motor side is selectable

Note. Upper robot cable (U) on models with brakes is a special order item, so please consult our sales office or sales representative for assistance.
(External dimensions: overall length + 20 mm)

Ordering method

F20

Model	Lead designation	Brake	Cable entry location	Origin position change	Grease type	Stroke	Cable length
	40: 40mm 20: 20mm 10: 10mm	No entry: BK: Brakes provided	No entry: Standard (S) U: From the top R: From the right L: From the left	None: Standard Z: Non-motor side	None: Standard GC: Clean	Lead 20-10: 200 to 1250 (50mm pitch) Lead 40: 200 to 1450 (50mm pitch) 3K/5K/10K (Flexible cable)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

- Note 1. The model with a lead of 40mm cannot select specifications with brake (vertical specifications).
Note 2. Upper robot cable (U) on models equipped with brake is a special-order item.
Note 3. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
Note 4. See P.498 for DIN rail mounting bracket.
Note 5. Acceleration / deceleration is different depending the Positioner or Controller or Driver.
Note 6. The robot with the high lead specifications (lead 40) needs a regenerative unit.
Note 7. Select this selection when using the gateway function. For details, see P.60.

TSX	220				
Positioner TS-X	Driver: Power-supply voltage Power capacity 220: 200V/400 to 600W	Regenerative unit No entry: None R: With RGT	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board	Battery A: With battery (Absolute) N: None (Incremental)
SR1-X	20				
Controller	Driver: Power capacity 20: 400 to 600W	Usable for CE No entry: Standard E: CE marking	Regenerative unit No entry: None R: With RG1	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	Battery B: With battery (Absolute) N: None (Incremental)
RDV-X	2	20			
Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 20: 600W or less	Regenerative unit RBR1 (Horizontal) RBR2 (Vertical)		

Specifications

AC servo motor output (W)	600
Repeatability (mm)	+/-0.01
Deceleration mechanism	Ball screw (Class C7)
Ball screw lead (mm)	40 20 10
Maximum speed (mm/sec)	2400 1000 (1200) 600
Maximum payload (kg)	Horizontal: 60 120 Vertical: 25 45
Rated thrust (N)	255 510 1020
Stroke (mm)	200 to 1450 (50mm pitch) Stroke+427 Stroke+417
Overall length (mm)	Horizontal: - Vertical: -
Maximum dimensions of cross section of main unit (mm)	W202 x H115
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves x 2 rail
Position detector	Resolvers
Resolution (Pulse/rotation)	16384

- Note 1. Positioning repeatability in one direction.
Note 2. When the stroke is longer than 800mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table below. To operate the unit at a speed exceeding 1,000mm/sec. (Max. speed), a regeneration unit RG1 is required.
Note 3. Longer than 1250mm stroke can be handled by the high lead specification (Lead 40) only.
Note 4. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang

	Horizontal installation	Wall installation	Vertical installation
	(Unit: mm)	(Unit: mm)	(Unit: mm)
Lead 40	10kg 4000 4000 3450 20kg 3397 2235 2073 60kg 2443 718 977 50kg 2602 869 1083 80kg 2193 528 703 120kg 1841 339 505	10kg 3571 4000 4000 20kg 2118 2164 3397 60kg 1000 648 2443 50kg 1097 799 2602 80kg 708 458 2193 120kg 468 268 1841	Lead 20 15kg 2635 2635 20kg 2000 2000 25kg 1621 1621 Lead 10 20kg 2188 2188 30kg 1446 1446 45kg 951 951

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment


	MY	MP	MR
	1196	1199	1052

Controller

Controller	Operation method
SR1-X20 RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X220	I/O point trace / Remote command
RDV-X220-RBR1 (Horizontal) RDV-X220-RBR2 (Vertical)	Pulse train control

Note. When using the vertical model, if the unit is operated at such speed exceeding the maximum speed of 1,000mm/sec., and if it has a high lead (40), a regeneration unit is required.

F20

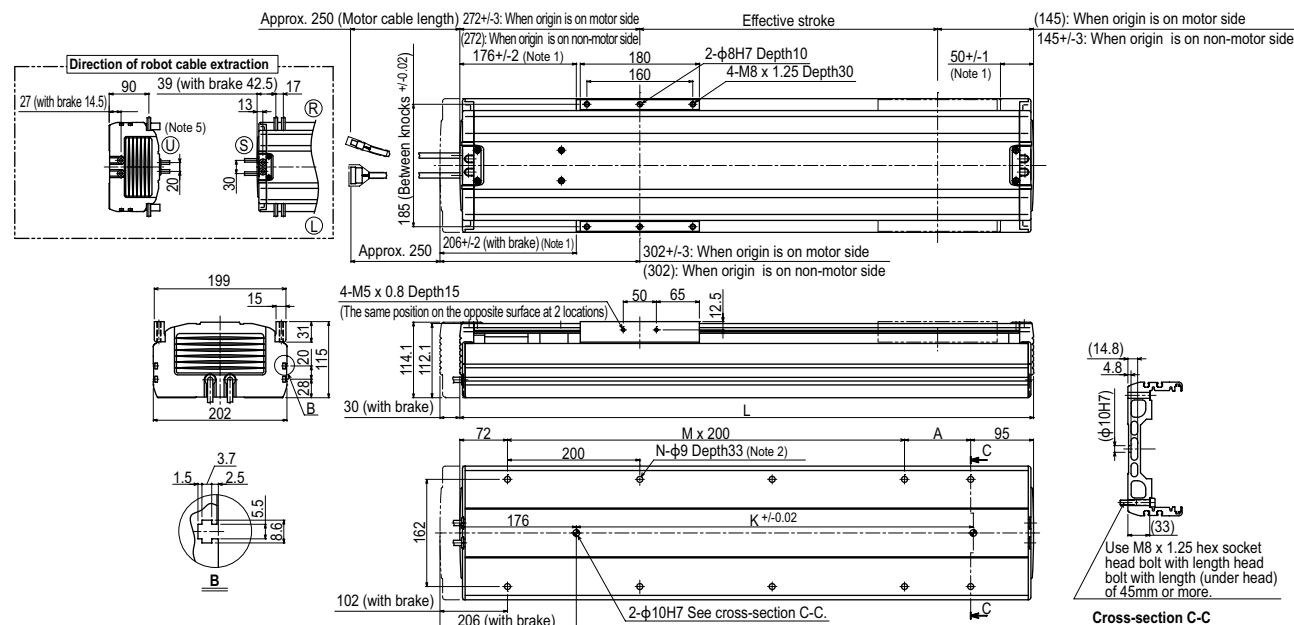

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. When installing the robot, do not use washers inside the robot body.

Note 3. Minimum bend radius of motor cable is R50.

Effective stroke	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	
L	627	677	727	777	827	877	927	977	1027	1077	1127	1177	1227	1277	1327	1377	1427	1477	1527	1577	1627	1677	1727	1777	1827	1877	
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	
M	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	
N	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20	
K	420	420	420	420	600	600	600	600	780	780	780	780	960	960	960	960	1140	1140	1140	1320	1320	1320	1320	1320	1320	1320	
Weight (kg)	21.2	22.2	23.1	24.0	25.0	25.9	26.8	27.7	28.7	29.6	30.5	31.4	32.3	33.2	34.2	35.1	36.0	36.9	37.9	38.8	39.7	40.6	41.5	42.4	43.3	44.2	
Maximum speed (mm/sec)	Lead 40	2400												1920		1680		1440		1200		960		840		720	
	Speed setting	—												80%		70%		60%		50%		40%		35%		30%	

Note 4. When the stroke is longer than 800mm, resonance of the ball screw may occur depending on the operation conditions (critical speed). In this case, reduce the speed setting on the program by referring to the maximum speeds shown in the table above.

Note 5. Longer than 1250mm stroke can be handled by the high lead specification (Lead 40) only.

F20N



Ordering method

Model	Lead designation	Origin position change	Grease type	Stroke	Cable length ^{Note 1}
F20N - 20		None: Standard Z: Non-motor side	None: Standard GC: Clean	1150 to 2050 (100mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
See P.594 for details on robot cable.
Note 2. See P.498 for DIN rail mounting bracket.
Note 3. Select this selection when using the gateway function. For details, see P.60.


TSX	220				
Positioner ^{Note 2} TS-X	Driver: Power-supply voltage / Power capacity 220: 200V/400 to 600W	Regenerative unit No entry: None R: With RGT	LCD monitor No entry: None L: With LCD	I/O selection N: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 3}	Battery B: With battery (Absolute) N: None (Incremental)
SR1-X	20				
Controller	Driver: Power capacity 20: 400 to 600W	Usable for CE No entry: Standard E: CE marking	Regenerative unit No entry: None R: With RGT	I/O selection N: NPN PN: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	Battery B: With battery (Absolute) N: None (Incremental)
RDV-X	2	20			
Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 20: 600W or less	RBR1	Regenerative unit	

Specifications

AC servo motor output (W)	400
Repeatability ^{Note 1} (mm)	±0.04
Deceleration mechanism	Ball screw (Class C10)
Ball screw lead (mm)	20
Maximum speed (mm/sec)	1000 (1200 ^{Note 2})
Maximum payload (kg)	80
Rated thrust (N)	339
Stroke (mm)	1150 to 2050 (100mm pitch)
Overall length (mm)	Stroke+420
Maximum dimensions of cross section of main unit (mm)	W202 × H120
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves × 2 rail
Position detector	Resolvers ^{Note 3}
Resolution (Pulse/rotation)	16384

Note 1. Positioning repeatability in one direction.
Note 2. A regenerative unit is needed if using the SR1-X, TS-X at maximum speeds exceeding 1000mm/sec.. If using the RDV-X, then the regenerative unit RBR1 is required regardless of the installation conditions.
Note 3. Position detectors(resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.


Allowable overhang^{Note}



Horizontal installation (Unit: mm)			
	A	B	C
20kg	3397	2332	2683
40kg	2795	1144	1361
60kg	2443	749	914
80kg	2193	551	695

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment





(Unit: N·m)		
MY	MP	MR
1196	1199	1052

Controller


Controller	Operation method
SR1-X20 ^{Note} RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X220 ^{Note} RDV-X220-RBR1	I/O point trace / Remote command / Pulse train control

Note. When the unit is operated at a speed exceeding the maximum speed of 1,000mm/sec., a regeneration unit is required.


F20N

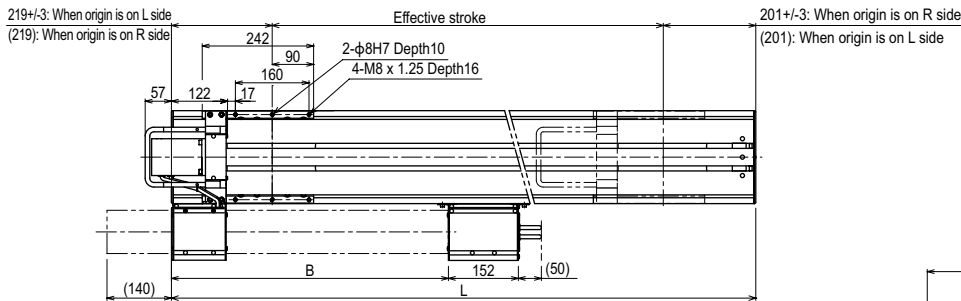

C section detailed chart

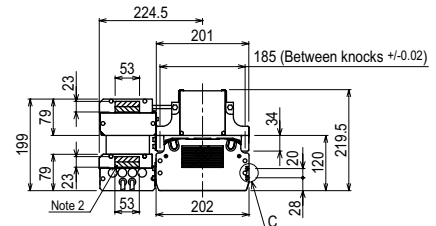

Cross section of cable guide



Cross-section D-D

Effective stroke	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050
L	1570	1670	1770	1870	1970	2070	2170	2270	2370	2470
A	100	200	100	200	100	200	100	200	100	200
B	602	648	694	740	786	832	878	924	970	1016
E	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320
M	7	7	8	8	9	9	10	10	11	11
N	18	18	20	20	22	22	24	24	26	26
Weight (kg)	54.0	56.2	58.4	60.6	62.9	65.1	67.3	69.6	71.8	74.0

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
Note 2. The shaded position indicates the user cable extraction port.
Note 3. When installing the robot, do not use washers inside the robot body.
Note 4. The origin is set on the left (L) side at shipping.



Ordering method

N15- 20							TSX					220					R					I/O selection					Battery				
Model	Lead designation	Cable carrier entry location ^{Note 1}	Cable carrier specification	Origin position change	Grease type	Stroke	Cable length ^{Note 2}	Positioner ^{Note 3}	Driver: Power-supply voltage / Power capacity	Regenerative unit	LCD monitor	Driver: Power-supply voltage / Power capacity	Usable for CE	Regenerative unit	I/O selection	Battery	Driver: Power-supply voltage / Power capacity	Usable for CE	Regenerative unit	I/O selection	Battery	Driver: Power-supply voltage / Power capacity	Usable for CE	Regenerative unit	I/O selection	Battery	Driver: Power-supply voltage / Power capacity	Usable for CE	Regenerative unit	I/O selection	Battery
		RH: Horizontal, right LH: Horizontal, left RW: Wall, right LW: Wall, left	S: Standard M: Optional C: Cable carrier	Hori- None R side (Standard) Z: L side Wall None L side (Standard) Z: R side	None: Standard GC: Clean	500 to 2000 (100mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	TS-X	220: 200V/400 to 600W	R: With RGT	No entry: None L: With LCD	220: 200V/400 to 600W	No entry: Standard E: CE marking	R: With RG1	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 4}	B: With battery (Absolute) N: None (Incremental)	20: 400 to 600W	No entry: Standard E: CE marking	R: With RG1	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	B: With battery (Absolute) N: None (Incremental)	2: AC200V	No entry: Standard E: CE marking	R: With RG1	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	B: With battery (Absolute) N: None (Incremental)	2: AC200V	No entry: Standard E: CE marking	R: With RG1	N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	B: With battery (Absolute) N: None (Incremental)

Note 1. To find information on cable carrier extraction directions see P.173.
 Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.594 for details on robot cable.
 Note 3. See P.498 for DIN rail mounting bracket.
 Note 4. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	400
Repeatability ^{Note 1} (mm)	±0.01
Deceleration mechanism	Ball screw $\phi 15$ (Class C7)
Ball screw lead (mm)	20
Maximum speed ^{Note 2} (mm/sec)	1200
Maximum payload (kg)	50
Rated thrust (N)	339
Stroke (mm)	500 to 2000 (100mm pitch)
Overall length (mm)	Stroke+330
Maximum dimensions of cross section of main unit (mm)	W145 × H120
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves × 2 rail
Position detector	Resolvers ^{Note 3}
Resolution (Pulse/rotation)	16384

Note 1. Positioning repeatability in one direction.
 Note 2. The maximum speed may not be reached when the moving distance is short.
 Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang^{Note}

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)			
	A	B	C		A	B	C
Lead 20	10kg 3048	2322	1259	10kg 1258	1823	2449	
	30kg 1489	841	500	30kg 428	545	1039	
	50kg 1278	544	344	50kg 248	289	749	

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Cable carrier for users

S type	Standard cable carrier	M type	Optional cable carrier
	Note. Cannot pass more than 3 urethane hoses ($\phi 6 \times 4$).		Space for optional cable for users


Static loading moment

(Unit: N·m)		
MY	MP	MR
691	692	608

Controller




Controller	Operation method
SR1-X20-R	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X220-R	I/O point trace / Remote command
RDV-X220-RBR1	Pulse train control

N15: Horizontal installation / Standard Cable carrier specification RH

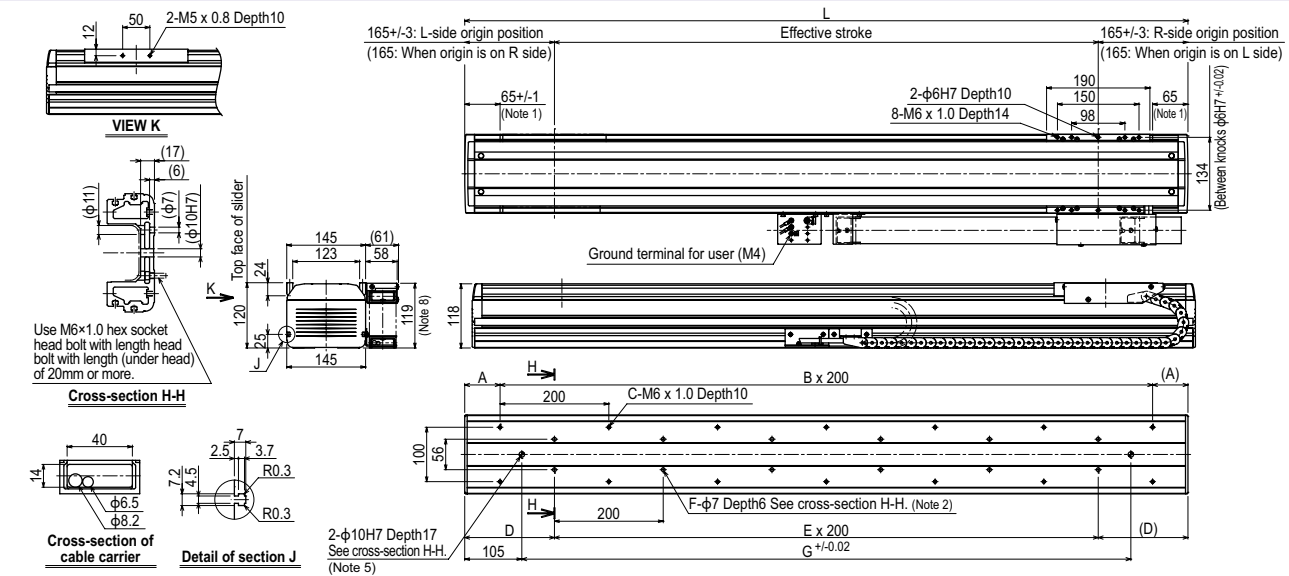

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When using $\phi 7$ holes for installation, do not use a washer, spring washer, etc. in the main unit.
 Note 3. When shipped from the factory, the horizontal model has the origin on the right side and the wall model has the origin on the left side. (This diagram shows the machine whose cable carrier taken out from right.)
 Note 4. If the model is a standard cable carrier specification, it is not possible to pass 3 or more $\phi 6 \times 4$ urethane air hoses.
 Note 5. When using a $\phi 10H$ hole, make sure that the pin does not go into deeper than as shown in the drawing.
 Note 6. Contact us for vertical installation.
 Note 7. Weight of models with no brake. The weight of brake-attached models is 1 kg heavier than the models with no brake shown in the table.
 Note 8. Depending on the stroke and the operating conditions, the cable carrier bending radius might be larger, making it higher than the dimensions shown in the diagram.

Effective stroke	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
L	830	930	1030	1130	1230	1330	1430	1530	1630	1730	1830	1930	2030	2130	2230	2330
A	15	65	15	65	15	65	15	65	15	65	15	65	15	65	15	65
B	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
C	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24
D	115	165	115	165	115	165	115	165	115	165	115	165	115	165	115	165
E	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10
F	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22
G	620	720	820	920	1020	1120	1220	1320	1420	1520	1620	1720	1820	1920	2020	2120
Weight (kg) ^{Note 7}	19	20	22	23	24	26	27	29	30	32	33	35	36	38	39	40

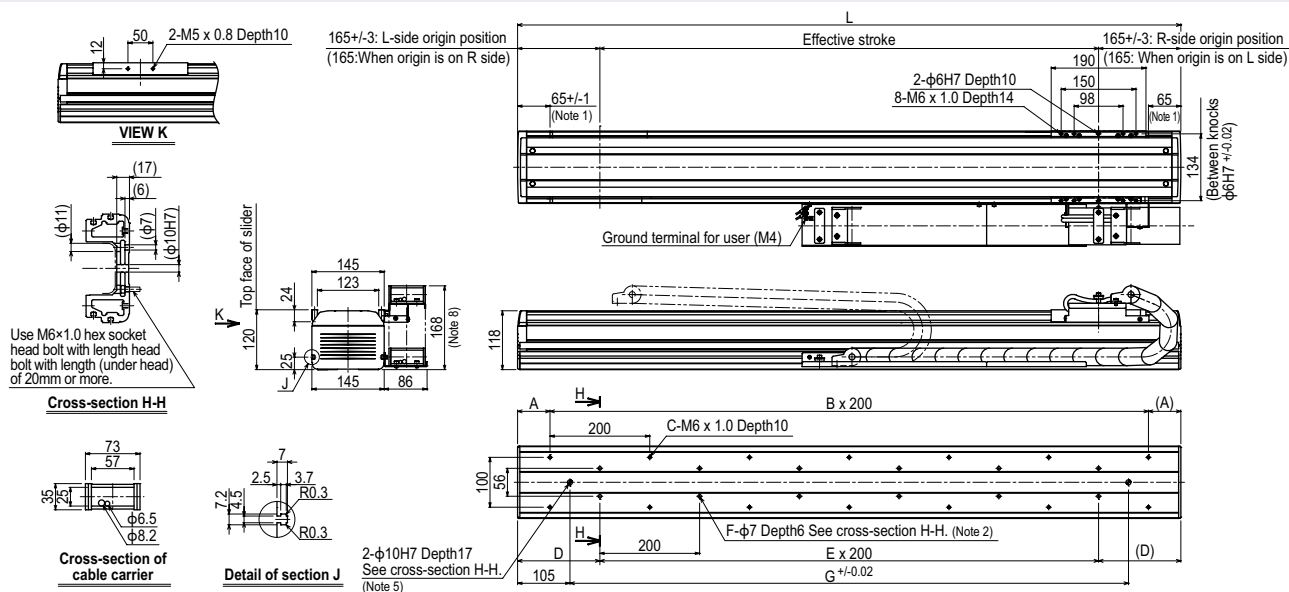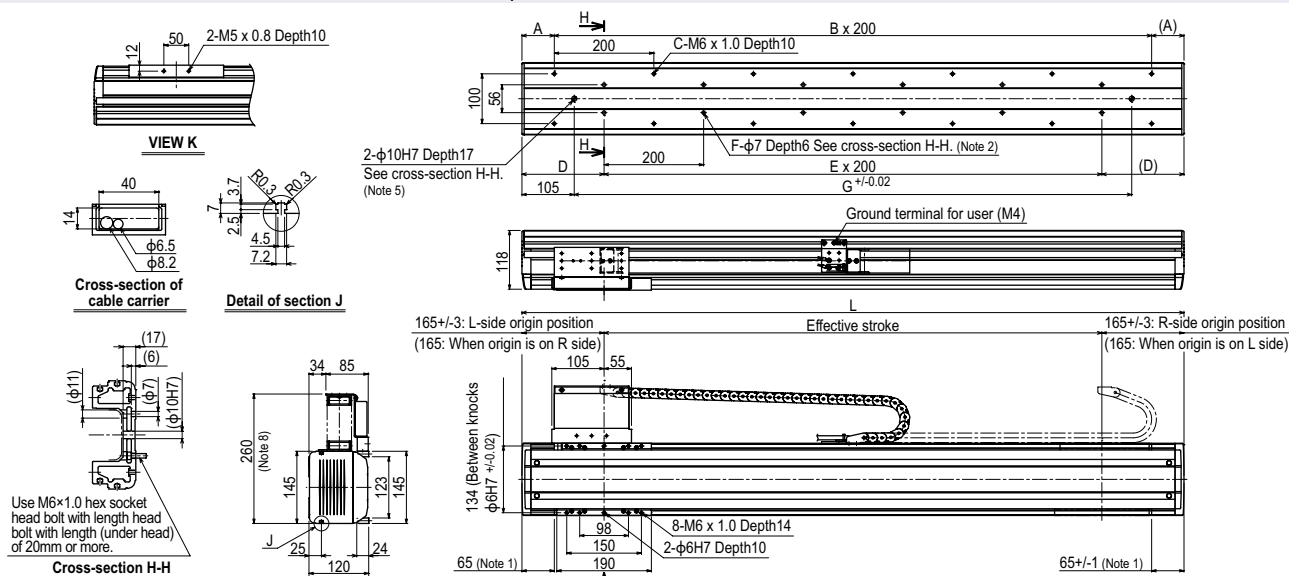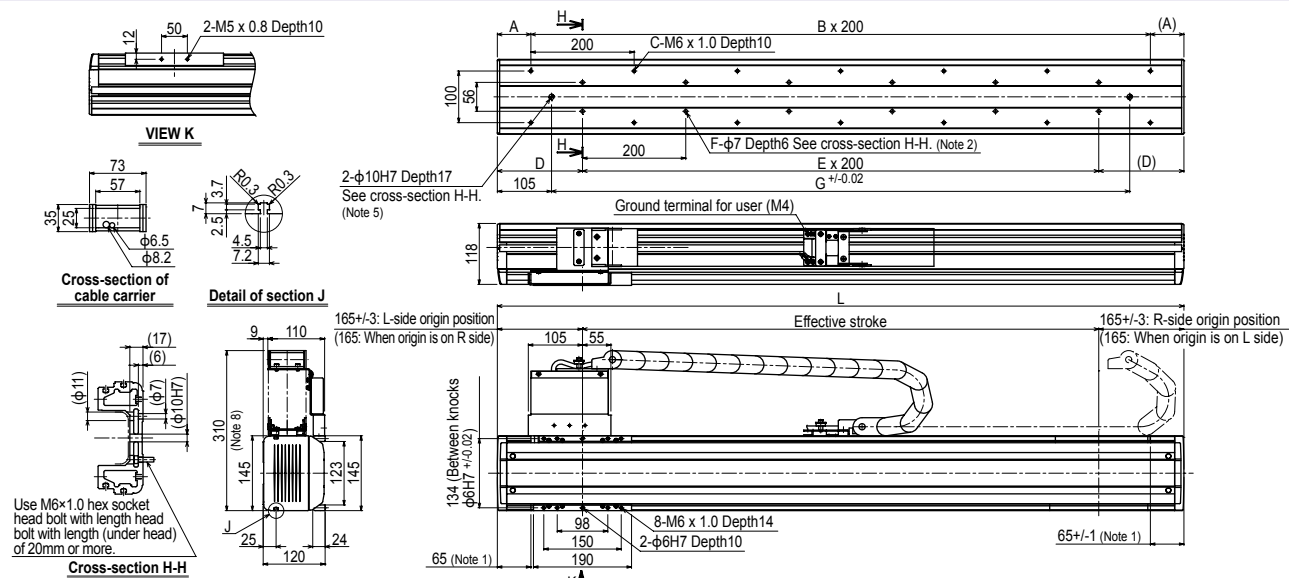N15: Horizontal installation / Optional Cable carrier specification **RH**N15: Wall installation / Standard Cable carrier specification **RW**N15: Wall installation / Optional Cable carrier specification **RW**



Ordering method

N18- 20

Model	Lead designation	Cable carrier entry location ^{Note 1}	Cable carrier specification	Origin position change	Grease type	Stroke	Cable length ^{Note 2}
		RH: Horizontal, right LH: Horizontal, left RW: Wall, right LW: Wall, left	S: Standard C: Cable carrier M: Optional Cable carrier	Horizontal Z: L side Wall None: L side (Standard) Z: R side	None: Standard GC: Clean	500 to 2500 (100mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

TSX	220	R			
Positioner ^{Note 3} TS-X	Driver: Power supply voltage / Power capacity 220: 200V/400 to 600W	Regenerative unit R: With RGT	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 4}	Battery B: With battery (Absolute) N: None (Incremental)
SR1-X	20		R		
Controller	Driver: Power capacity 20: 400 to 600W	Usable for CE No entry: Standard E: CE marking	Regenerative unit R: With RG1	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	Battery B: With battery (Absolute) N: None (Incremental)
RDV-X	2		20	RBR1	
Driver	Power supply voltage 2: AC200V		Driver: Power capacity 20: 600W or less	Regenerative unit	

Note 1. To find information on cable carrier extraction directions see P.173.
 Note 2. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
 See P.594 for details on robot cable.
 Note 3. See P.498 for DIN rail mounting bracket.
 Note 4. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	400
Repeatability ^{Note 1} (mm)	+/-0.01
Deceleration mechanism	Ball screw $\phi 20$ (Class C7)
Ball screw lead (mm)	20
Maximum speed ^{Note 2} (mm/sec)	1200
Maximum payload (kg)	80
Rated thrust (N)	339
Stroke (mm)	500 to 2500 (100mm pitch)
Overall length (mm)	Stroke+362
Maximum dimensions of cross section of main unit (mm)	W180 x H115
Cable length (m)	Standard: 3.5 / Option: 5,10
Linear guide type	4 rows of circular arc grooves x 2 rail
Position detector	Resolvers ^{Note 3}
Resolution (Pulse/rotation)	16384

Note 1. Repeatability for single oscillation.
 Note 2. The maximum speed may not be reached when the moving distance is short.
 Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang^{Note}

	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)		
	A	B	C	A	B	C
Lead 20	30kg 3045	1629	1902	30kg 1928	1553	3045
	50kg 2602	961	1150	50kg 1157	885	2602
	80kg 2193	586	716	80kg 707	509	2193

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Cable carrier for users

S type	Standard cable carrier	M type	Optional cable carrier
	Note. Cannot pass more than 3 urethane hoses (φ6 x 4).		


Static loading moment

	MY	MP	MR
(Unit: N·m)	1161	1163	1021

Controller




Controller	Operation method
SR1-X20-R RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X220-R	I/O point trace / Remote command
RDV-X220-RBR1	Pulse train control

N18: Horizontal installation / Standard Cable carrier specification RH

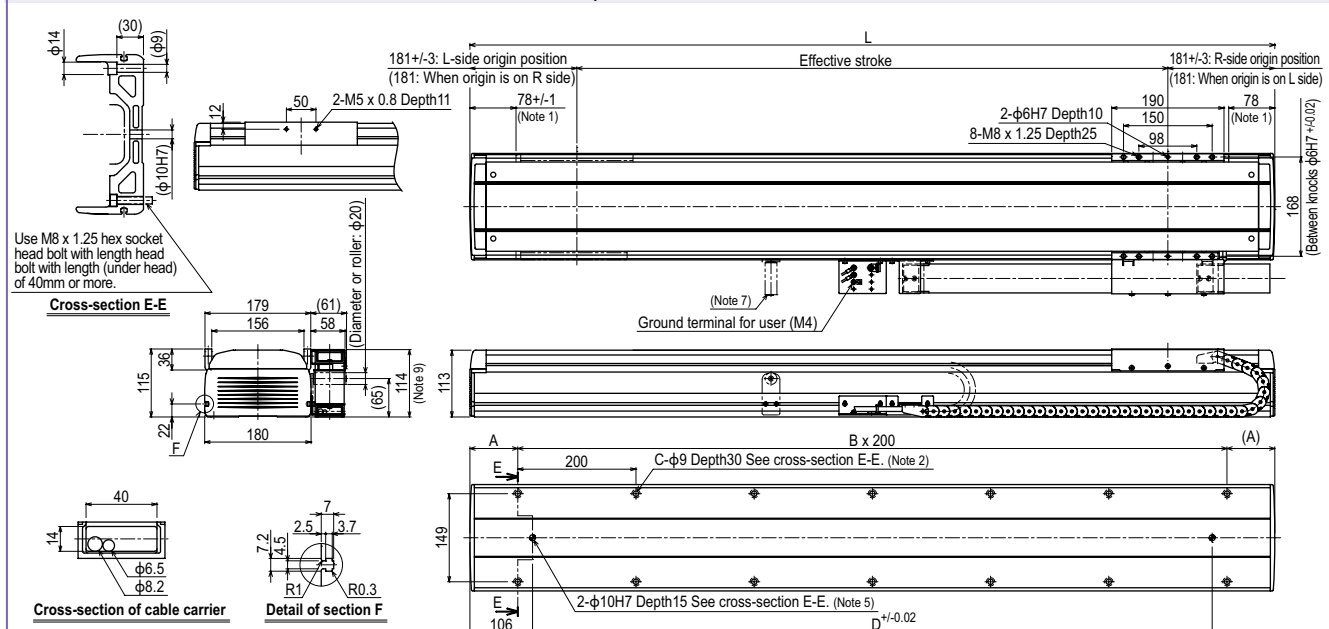

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When using $\phi 9$ holes for installation, do not use a washer, spring washer, etc. in the main unit.
 Note 3. When shipped from the factory, the horizontal model has the origin on the right side and the wall model has the origin on the left side. (This diagram shows the machine whose cable carrier taken out from right.)
 Note 4. If the model is a standard cable carrier specification, it is not possible to pass 3 or more $\phi 6 \times 4$ urethane air hoses.
 Note 5. When using a $\phi 10H7$ hole, make sure that the pin does not go into deeper than as shown in the drawing.
 Note 6. Contact us for vertical installation.
 Note 7. For the robot with more than 2,100 stroke, a roller is installed to prevent the cable carrier hanging.
 Note 8. Weight of models with no brake. The weight of brake-attached models is 1 kg heavier than the models with no brake shown in the table.
 Note 9. Depending on the stroke and the operating conditions, the cable carrier bending radius might be larger, making it higher than the dimensions shown in the diagram.

Effective stroke	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500
L	862	962	1062	1162	1262	1362	1462	1562	1662	1762	1862	1962	2062	2162	2262	2362	2462	2562	2662	2762	2862
A	131	81	131	81	131	81	131	81	131	81	131	81	131	81	131	81	131	81	131	81	131
B	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13
C	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28
D	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650
Weight (kg) ^{Note 8}	27	29	31	33	35	37	39	41	43	45	47	48	50	52	54	56	58	60	62	64	66

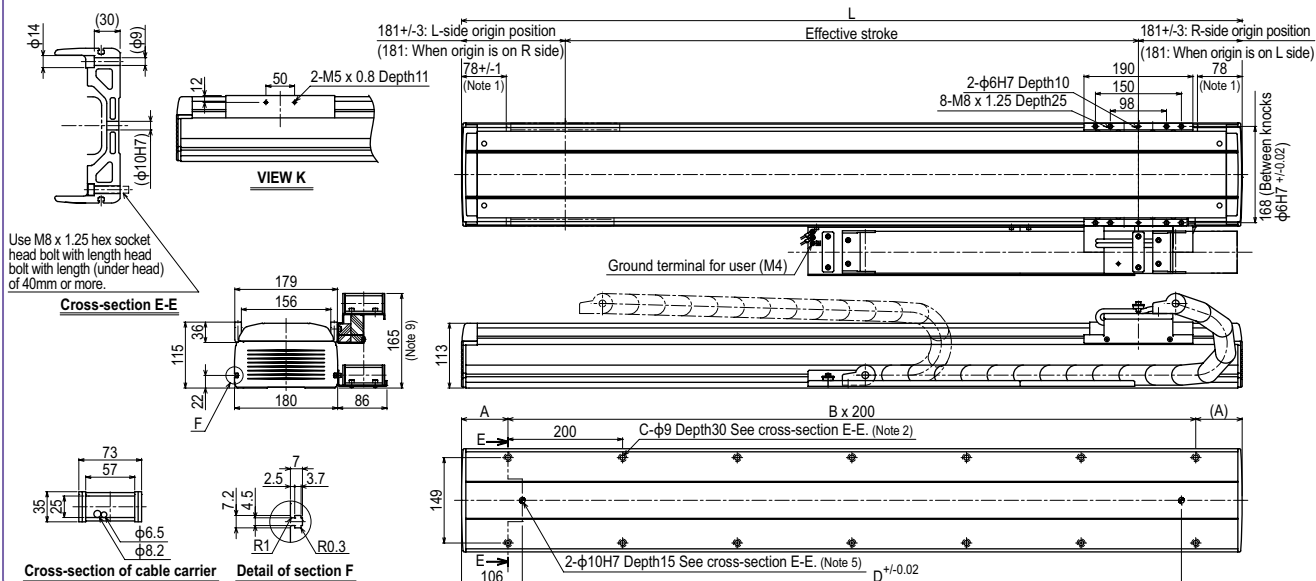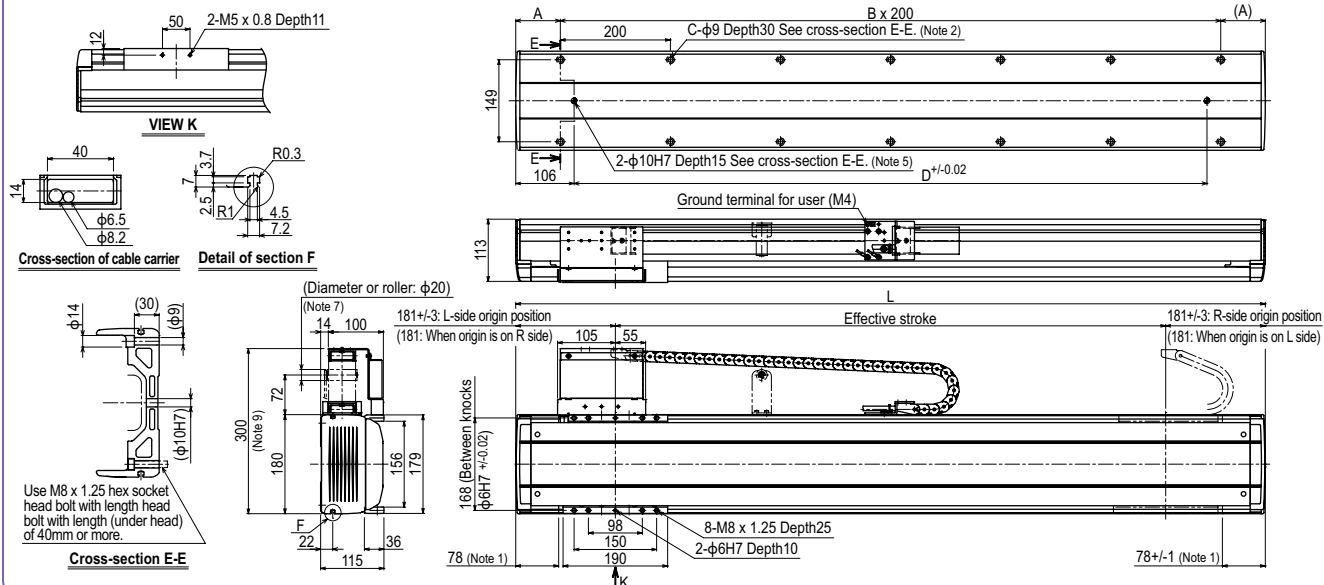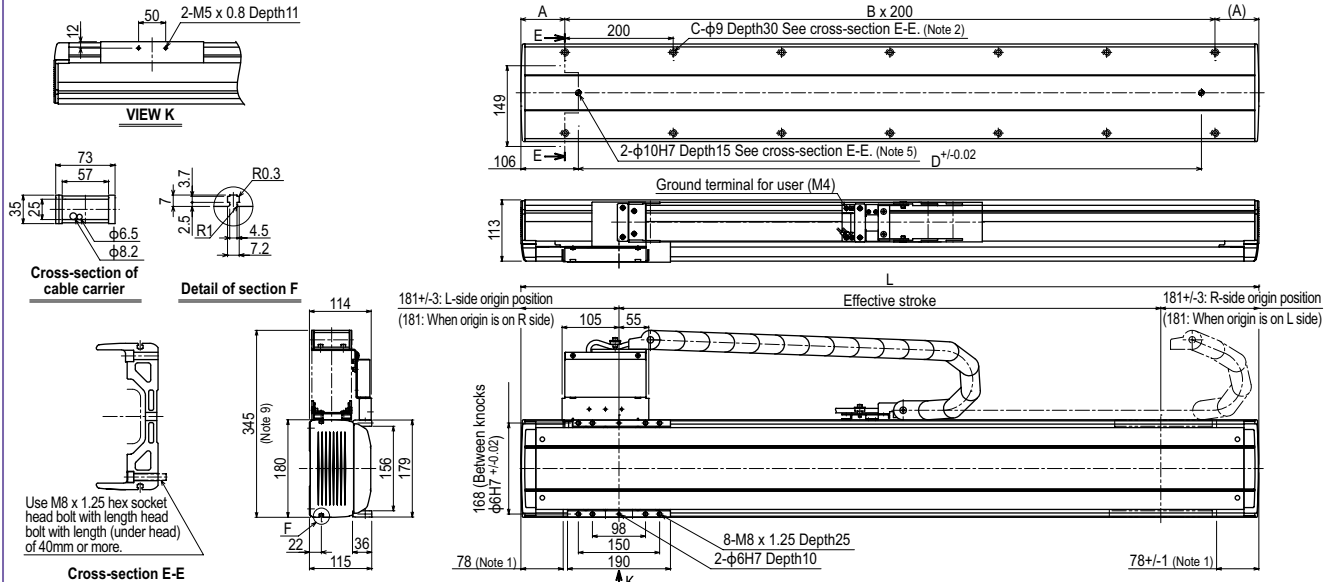N18: Horizontal installation / Optional Cable carrier specification **RH**N18: Wall installation / Standard Cable carrier specification **RW**N18: Wall installation / Optional Cable carrier specification **RW**

N18D

Double carriage

Ordering method

N18D - 20							RCX222HP		R		
Model	Lead designation	Installation direction	Cable carrier specification	Option	Stroke	Cable length	Controller	Usable for CE	Regenerative unit	I/O selection1	I/O selection2
		H: Horizontal installation W: Wall installation	S: Standard Cable carrier M: Optional Cable carrier	Grease type None: Standard GC: Clean	250 to 2250 (100mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	RCX222HP SR1-X (2 units) TS-X (2 units) RDV-X (2 units)	No entry: Standard E: CE marking	R: RG2	N: NPN P: PNP CC: CC-Link DN: DeviceNet PB: PROFIBUS EN: Ethernet	No entry: None Nt: OPD/O24/16 (NPN) Pt: OPD/O24/17 (PNP) EN: Ethernet

Note 1. To find controller selection options for other than the RCX222HP, see the ordering method on each controller page.

Note 2. 2 units are required when using SR1-X, TS-X or RDV-X.

Note 3. NPN and Ethernet cannot be selected when using CE marking.

Note 4. Only when you have selected CC, DN or PB for Input/Output selection 1, you can select EN for Input/Output selection 2.

Note 5. If a flexible cable is needed for the SR1-X, TS-X, or RDV-X, then select 3K/5K/10K. On the RCX222HP, the standard cable is a flexible cable, so enter 3L/5L/10L when ordering.

Specifications

AC servo motor output (W)	400
Repeatability ^{Note 1} (mm)	+/-0.01
Deceleration mechanism	Ball screw $\phi 20$ (Class C7)
Ball screw lead (mm)	20
Maximum speed ^{Note 2} (mm/sec)	1200
Maximum payload (kg)	80
Rated thrust (N)	339
Stroke (mm)	250 to 2250 (100 pitch)
Overall length (mm)	Stroke+362
Maximum dimensions of cross section of main unit (mm)	W180 × H115
Cable length (m)	Standard: 3.5 / Option: 5, 10
Linear guide type	4 rows of circular arc grooves × 2 rail
Position detector	Resolvers ^{Note 3}
Resolution (Pulse/rotation)	16384

Note 1. Positioning repeatability in one direction.

Note 2. The maximum speed may not be reached when the moving distance is short.



Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang^{Note}

	Horizontal installation	Wall installation
	(Unit: mm)	(Unit: mm)
Lead 20	A B C	A B C
30kg	3045 1629 1902	1928 1553 3045
50kg	2602 961 1150	1157 885 2602
80kg	2193 586 716	707 509 2193

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Cable carrier for users

S type	Standard cable carrier	M type	Optional cable carrier
	Note. Cannot pass more than 3 urethane hoses ($\phi 6 \times 4$). 		

Static loading moment


	MY	MP	MR
(Unit: N·m)	1161	1163	1021

Controller

Controller	Operation method
RCX222HP-R	Programming / I/O point trace / Remote command / Operation using RS-232C communication
SR1-X20-R ^{Note}	I/O point trace / Remote command
TS-X220-R ^{Note}	Pulse train control
RDV-X20-RBR1 ^{Note}	

Note. 2 units are required when using SR1-X, TS-X or RDV-X.

N18D: Horizontal installation / Standard Cable carrier specification

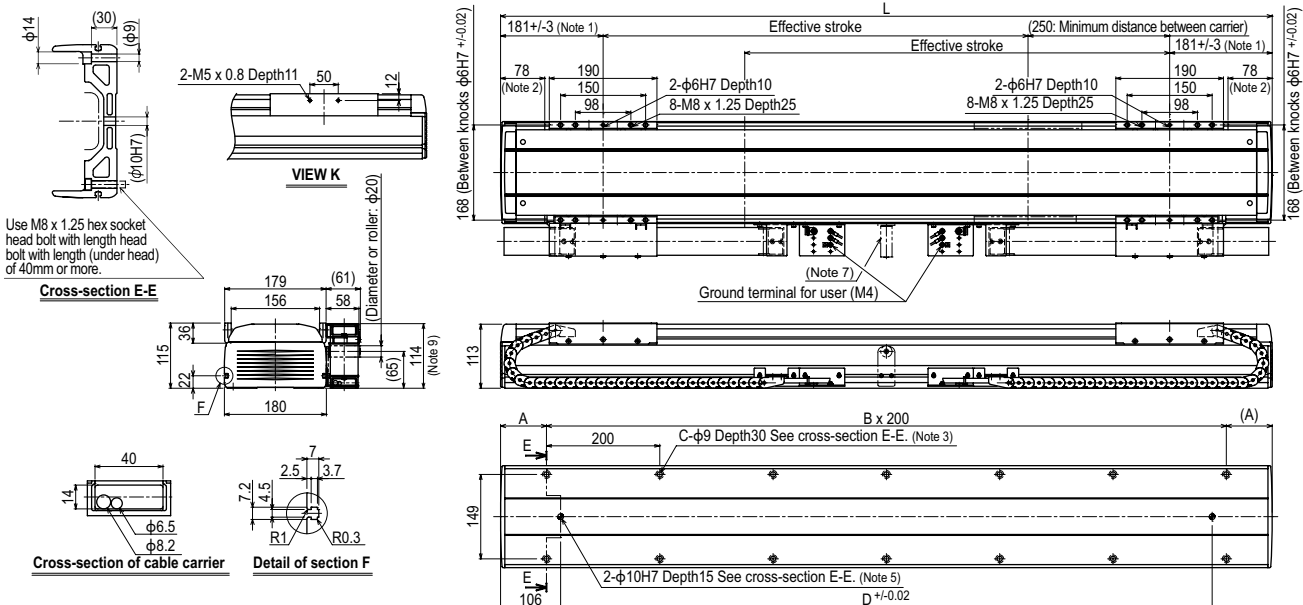

Note 1. Position of table carriage when searched to the origin.

Note 2. Stop positions are determined by the mechanical stoppers at both ends.

Note 3. When using $\phi 9$ holes for installation, do not use a washer, spring washer, etc. in the main unit.

Note 4. If the model is a standard cable carrier specification, it is not possible to pass 3 or more $\phi 6 \times 4$ urethane air hoses.

Note 5. When using a $\phi 10H7$ hole, make sure that the pin does not go into deeper than as shown in the drawing.

Note 6. Contact us for vertical installation.


Note 7. For the robot with more than 2,050 stroke, a roller to prevent the cable carrier from hanging is provided.

Note 8. Weight of models with no brake. The weight of brake-attached models is 1 kg heavier than the models with no brake shown in the table.


Note 9. Depending on the stroke and the operating conditions, the cable carrier bending radius might be larger, making it higher than the dimensions shown in the diagram.

Effective stroke	250	350	450	550	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250
L	862	962	1062	1162	1262	1362	1462	1562	1662	1762	1862	1962	2062	2162	2262	2362	2462	2562	2662	2762	2862
A	131	81	131	81	131	81	131	81	131	81	131	81	131	81	131	81	131	81	131	81	131
B	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13
C	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28
D	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150	2250	2350	2450	2550	2650
Weight (kg) ^{Note 8}	35	37	39	41	43	45	47	48	50	52	54	56	58	60	62	64	66	68	70	72	74


N18D: Horizontal installation / Optional Cable carrier specification

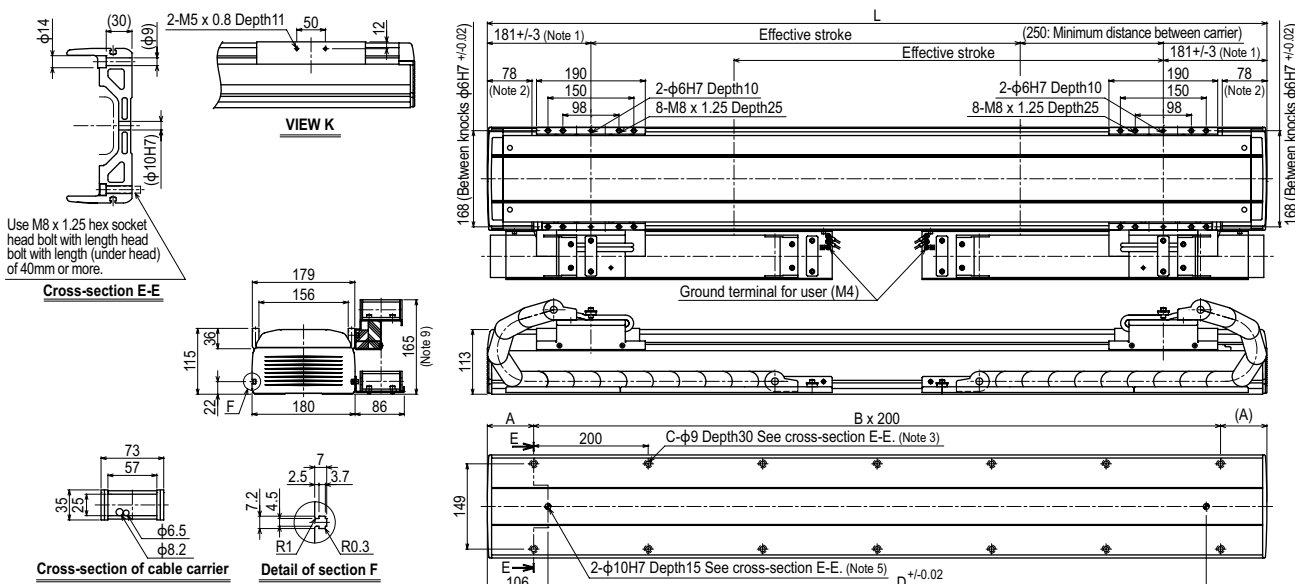

N18D: Wall installation / Standard Cable carrier specification

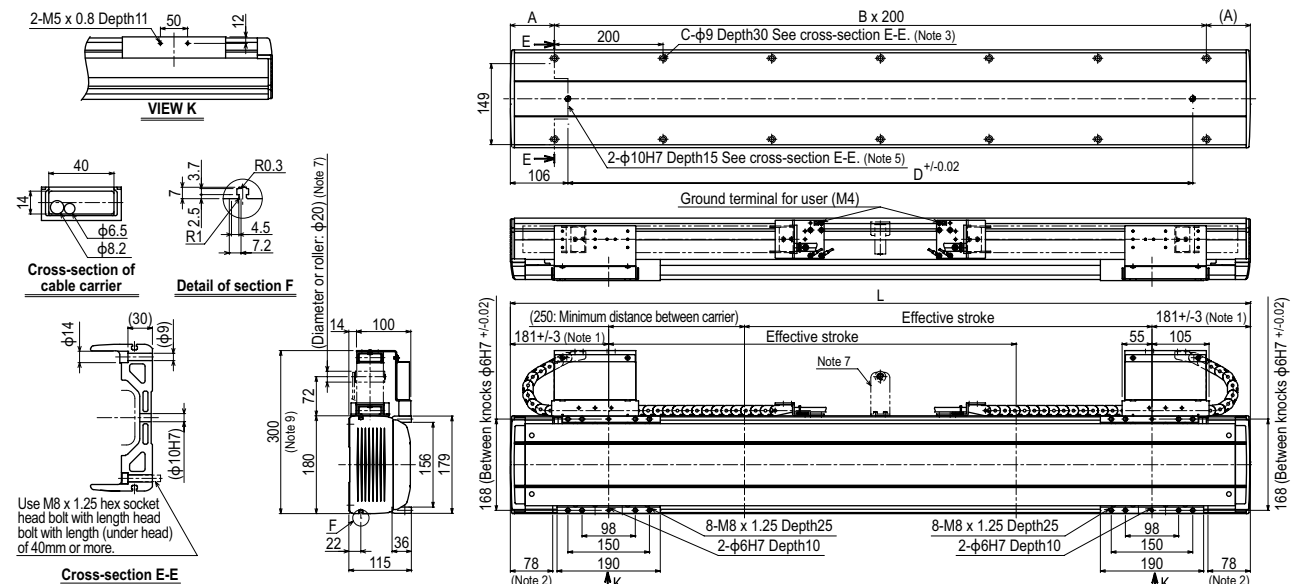

N18D: Wall installation / Optional Cable carrier specification

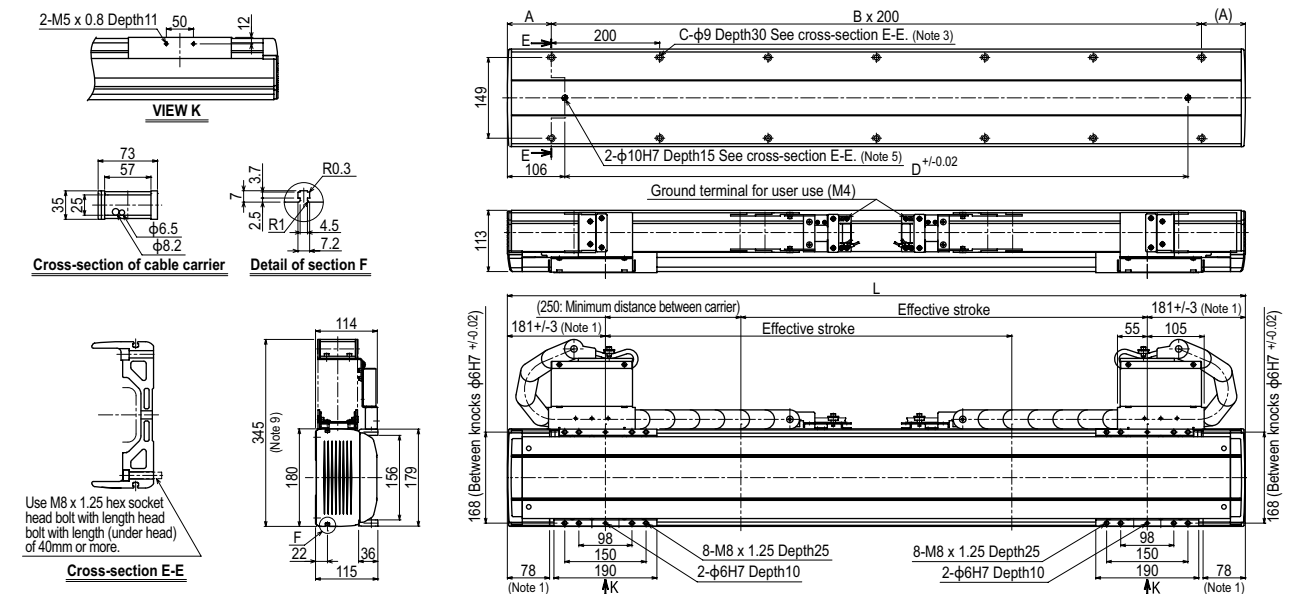

B10

Ordering method

B10

Model	Motor installation direction	Option	Stroke	Cable length ^{Note1}
	L: Motor leftward, horizontal position R: Motor rightward, horizontal position LU: Motor leftward, upper position RU: Motor rightward, upper position LD: Motor leftward, lower position RD: Motor rightward, lower position	Grease type None: Standard GC: Clean	150 to 2550 (100mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

TSX

Positioner ^{Note2} TS-X	Driver: Power-supply voltage / Power capacity 105: 100V/100W or less 205: 200V/100W or less	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note3}	Battery B: With battery (Absolute) N: None (Incremental)
-------------------------------------	--	--	---	--

SR1-X

Controller	05 Driver: Power capacity 05: 100W or less	Usable for CE No entry: Standard E: CE marking	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	Battery B: With battery (Absolute) N: None (Incremental)
------------	--	--	--	--

RDV-X

Driver	2 Power-supply voltage 2: AC200V	05 Driver: Power capacity 05: 100W or less	RBR1 Regenerative unit
--------	--	--	---------------------------

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
See P.594 for details on robot cable.
Note 2. See P.498 for DIN rail mounting bracket.
Note 3. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	100
Repeatability ^{Note1} (mm)	±0.04
Belt (mm)	Equivalent to lead 25
Maximum speed (mm/sec)	1875
Maximum payload (kg)	10
Stroke (mm)	150 to 2550 (100mm pitch)
Overall length (mm)	Motor installation Another
Maximum dimensions of cross section of main unit (mm)	W100 × H81
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves × 1 rail
Position detector	Resolvers ^{Note2}
Resolution (Pulse/rotation)	16384

Note 1. Positioning repeatability in one direction.
Note 2. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang^{Note}

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)			
	A	B	C		A	B	C
3kg	1800	1392	1084	3kg	1144	1005	1734
5kg	1574	826	696	5kg	724	576	1199
8kg	1221	509	474	8kg	493	333	918
10kg	1171	403	407	10kg	414	254	869

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment


(Unit: N·m)		
MY	MP	MR
188	188	165

Controller


Controller	Operation method
SR1-X05 RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105 TS-X205	I/O point trace / Remote command
RDV-X205-RBR1	Pulse train control

Motor installation

The line-up consisting of six models of deferent motor installation position as follows.

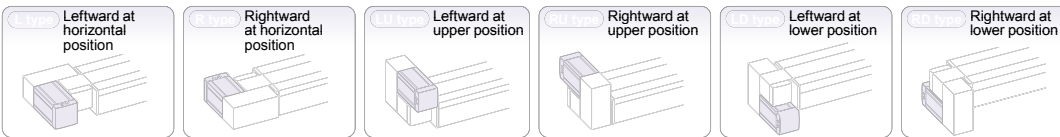

B10 R type (Motor rightward, horizontal position)

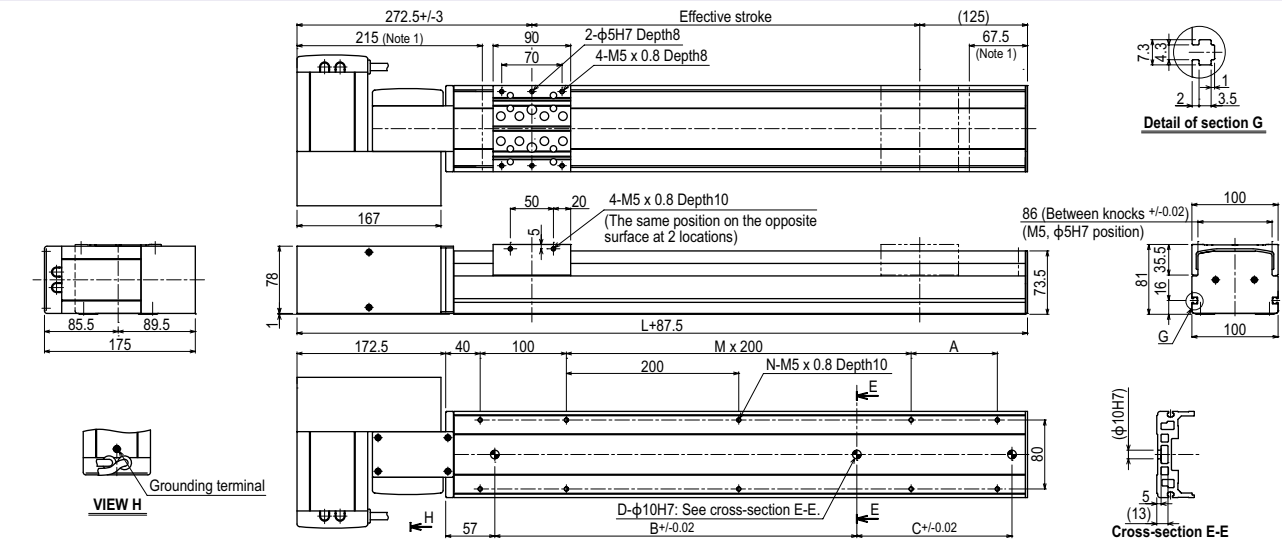


Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350
L	460	510	560	610	660	710	760	810	860	910	960	1010	1060	1110	1160	1210	1260	1310	1360	1410	1460	1510	1560	1610	1660
A	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
B	240	240	240	420	420	420	600	600	600	600	780	780	780	780	960	960	960	960	1140	1140	1140	1140	1320	1320	1320
C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
D	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
M	-	1	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	6	6	6	6
N	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18
Weight (kg)	7.4	7.8	8.2	8.6	9.0	9.4	9.8	10.1	10.5	10.9	11.3	11.7	12.1	12.5	12.9	13.3	13.7	14.1	14.5	14.9	15.3	15.7	16.1	16.5	16.9


Effective stroke	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550
L	1710	1760	1810	1860	1910	1960	2010	2060	2110	2160	2210	2260	2310	2360	2410	2460	2510	2560	2610	2660	2710	2760	2810	2860
A	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200
B	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320	1320
C	-	240	240	240	420	420	420	420	600	600	600	780	780	780	780	960	960	960	960	1140	1140	1140	1140	1320
D	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
M	7	7	7	7	8	8	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12
N	20	20	20	20	22	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30
Weight (kg)	17.3	17.7	18.0	18.4	18.8	19.2	19.6	20.0	20.4	20.8	21.2	21.6	22.0	22.4	22.8	23.2	23.6	24.0	24.4	24.8	25.2	25.6	25.9	26.3

Note 1. Stop positions are determined by the mechanical stoppers at both ends.
Note 2. Cables can be extracted in upward, downward, forward or rearward directions. (This figure shows the forward direction.)


B10 RU type (Motor rightward, upper position)

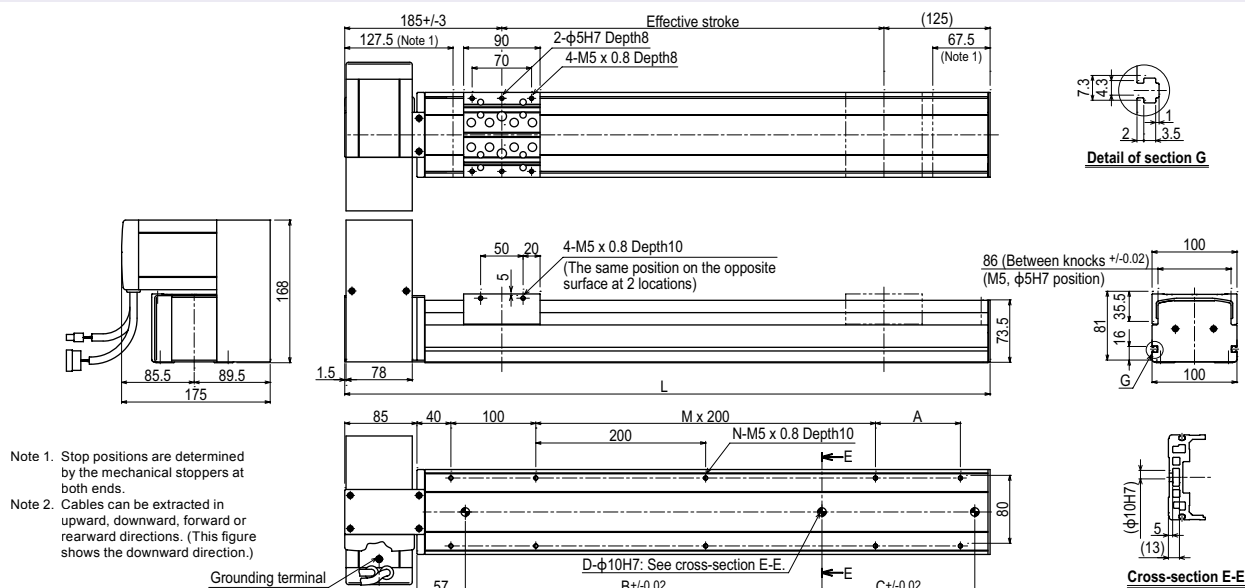

B10 RD type (Motor rightward, lower position)

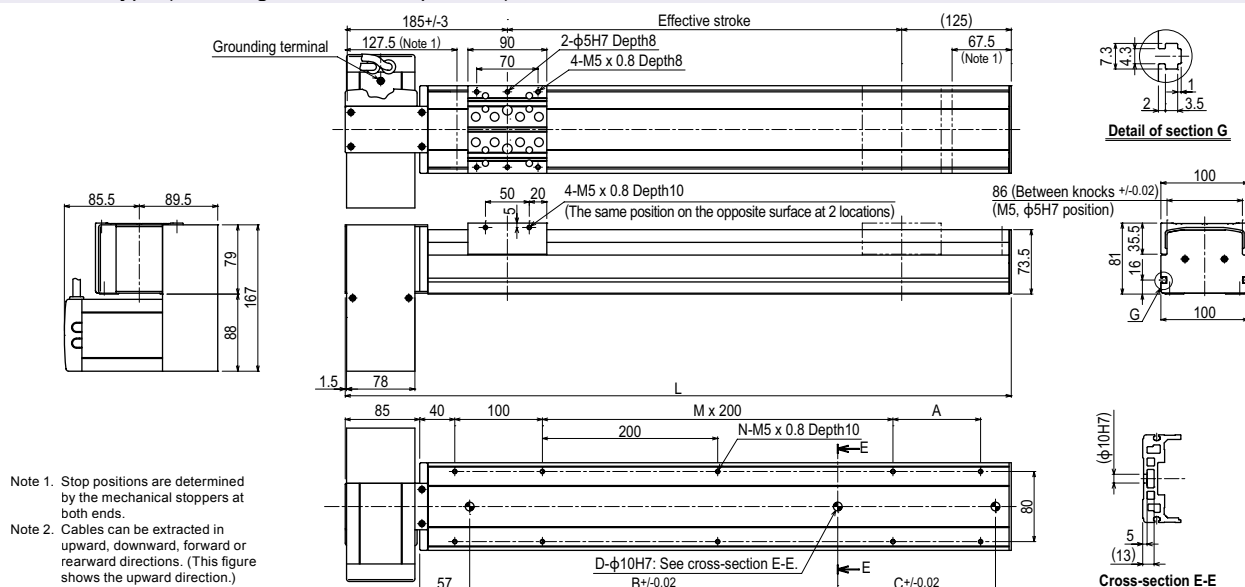

B10 LU type (Motor leftward, upper position)

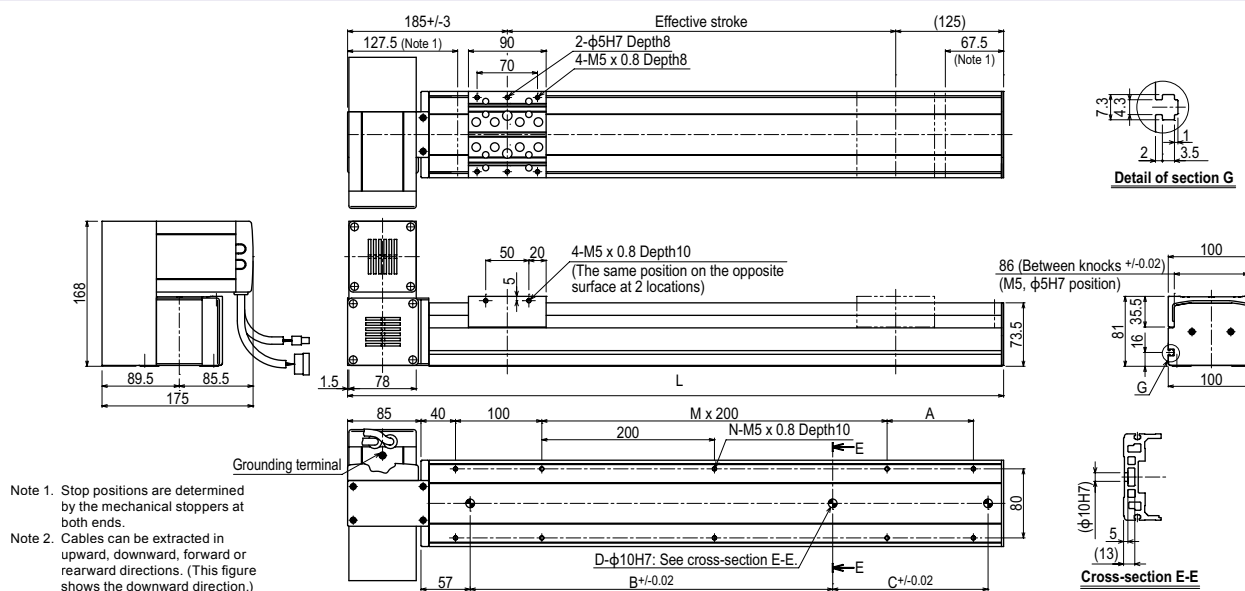

	Motor installation direction
L:	Motor leftward, horizontal position
R:	Motor rightward, horizontal position
LU:	Motor leftward, upper position
RU:	Motor rightward, upper position
LD:	Motor leftward, lower position
RD:	Motor rightward, lower position

Option	Stroke	Cable length Notes 1
Grease type	None:	3L: 3.5m
	Standard	5L: 5m
	GC: Clean	10L: 10m
		3K/5K/10K (Flexible cable)

TSX
Positioner^{Note}
TS-X

Driver:	Power-supply voltage / Power capacity
105:	100V/100W or less
205:	200V/100W or less

LCD monitor
No entry: None

I/O selection	
NP:	NPN
PN:	PNP
CC:	CC-Link
DN:	DeviceNet™
EP:	EtherNet/IP™
PT:	PROFINET
GW:	No I/O board Note 1

Battery	
B:	With battery (Absolute)
N:	None (Incremental)

SR1-X
Controller

05
Driver: Power capacity
05: 100W or less

	Usable for CE
No entry:	Standard
E:	CE marking

I/O selection	
N:	NPN
P:	PNP
CC:	CC-Link
DN:	DeviceNet™
PR:	PROFIBUS

Battery	
B: With battery	(Absolute)
N: None	(Incremental)

RDV-X
Driver

2
Power-supply voltage
2: AC200V

05
Driver: Power capacit
05: 100W or less

RBR1
Regenerative unit

AC servo motor output (W)			100
Repeatability ^{Note 1} (mm)			+/-0.04
Belt (mm)			Equivalent to lead 25mm
Maximum speed (mm/sec)			1875
Maximum payload (kg)			20
Stroke (mm)			150 to 3050 (100mm pitch)
Overall length (mm)	Motor installation	L/R type Another	Stroke+425.5
Maximum dimensions of cross section of main unit (mm)			Stroke+338
Cable length (m)			W146 × H94
Linear guide type			Standard: 3.5 / Option: 5,10
Position detector			4 rows of circular arc grooves × 2 rail
Resolution (Pulse/rotation)			Resolvers ^{Note 2}
			16384

Note 2. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Horizontal installation			(Unit: mm)
	A	B	C
5kg	2159	1228	943
10kg	1389	623	548
20kg	1102	320	348

A diagram of a horizontal beam of length 10 m. A triangular load starts at 0 kN/m at the left end and increases linearly to 10 kN/m at the right end. A point load of 10 kN is applied vertically downwards at the right end of the beam, labeled B. The left end is labeled A, and the right end is labeled B. The triangular load is represented by a shaded area under the beam.

Wall installation		(Unit: mm)	
	A	B	C
5kg	1064	816	1468
10kg	564	377	888
20kg	305	156	615

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

(Unit: N·m)		
MY	MP	MR
226	227	199

Controller	Operation method
SR1-X05 RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105	I/O point trace /
TS-X205	Remote command
RDV-X205-RBR1	Pulse train control

Technical drawing of a 1000mm long cable tray. The drawing includes a top view, a side view, and a cross-section J-J.

Top View Dimensions:

- Overall length: 1000
- Overall width: 175
- Distance from left end to first hole: 83
- Distance between holes: 92
- Distance from last hole to right end: 11
- Distance from left end to first hole (bottom): 83
- Distance between holes (bottom): 92
- Distance from last hole to right end (bottom): 11

Side View Dimensions:

- Overall height: 90
- Distance from top to bottom flange: 78
- Distance from bottom flange to base: 11
- Distance from left end to first hole: 83
- Distance between holes: 92
- Distance from last hole to right end: 11

Cross-section J-J Dimensions:

- Overall width: 175
- Distance from left end to first hole: 83
- Distance between holes: 92
- Distance from last hole to right end: 11
- Distance from top to bottom flange: 78
- Distance from bottom flange to base: 11


Callouts and Notes:

- 2-φ6H7 Depth10
- 8-M6 x 1.0 Depth16
- 4-M5 x 0.8 Depth12 (The same position on the opposite surface at 2 locations)
- 134 (Between knocks +/-0.02) (M6, φ6H7 position)
- Effective stroke
- 297.5+/-3
- 240 (Note 1)
- 90
- 70
- 32
- 70.5 (Note 1)
- 167
- 50
- 20
- 12.5
- L+87.5
- B x 200
- M-M6 x 1.0 Depth10
- F-φ10H7 See cross-section J-J C+/-0.02
- D+/-0.02
- E+/-0.02
- J
- 85
- 100
- 200
- A
- 100
- 5.5
- 18.5
- φ10H7
- Grounding terminal
- VIEW H
- Cross-section J-J


[illegible]

Effective stroke	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050
L	1988	2038	2088	2138	2188	2238	2288	2338	2388	2438	2488	2538	2588	2638	2688	2738	2788	2838	2888	2938	2988	3038	3088	3138	3188	3238	3288	3338	3388
M	22	22	22	24	24	24	24	26	26	26	26	28	28	28	28	30	30	30	32	32	32	32	34	34	34	34	36	36	36
A	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100
C	8	8	8	9	9	9	9	10	10	10	10	11	11	11	11	12	12	12	12	13	13	13	14	14	14	15	15	15	16
B	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140
D	600	600	600	780	780	780	780	960	960	960	960	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140
E	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	240	240	240	240	420	420	420	600	600	600	600	780	780
F	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	4	4	4	4	4	4	4	4	4
Weight (ka)	27.2	27.7	28.3	28.9	29.5	30.1	30.7	31.3	31.9	32.4	33	33.6	34.2	34.8	35.4	35.9	36.5	37.1	37.7	38.3	38.9	39.4	40	40.6	41.2	41.8	42.4	43.0	43.6


B14 RU type (Motor rightward, upper position)

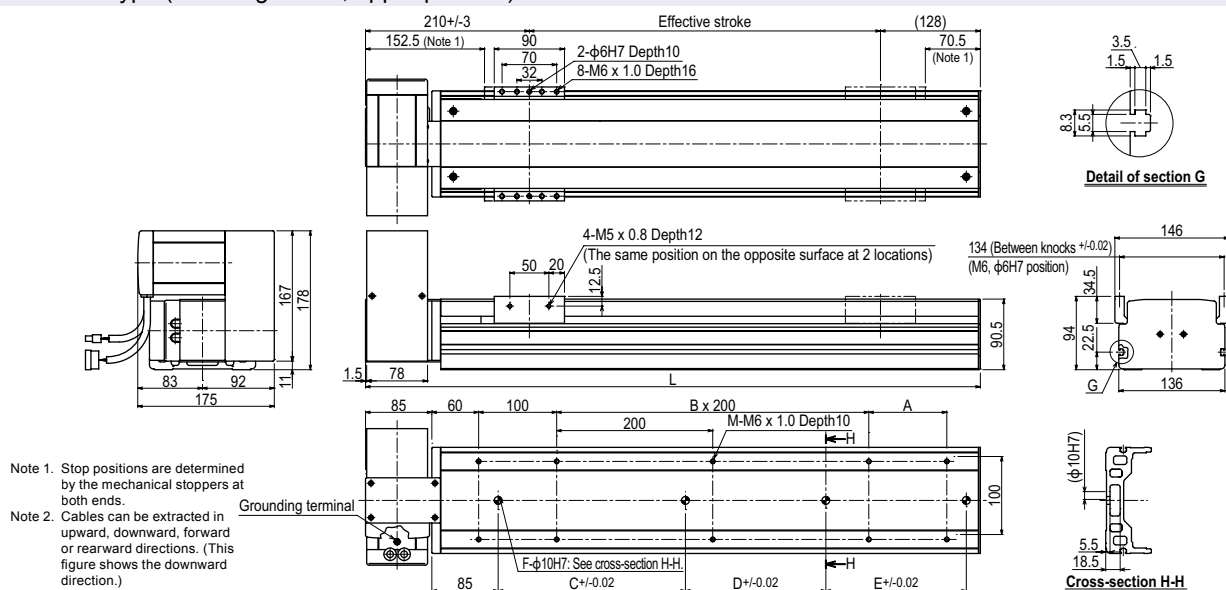

B14 RD type (Motor rightward, lower position)

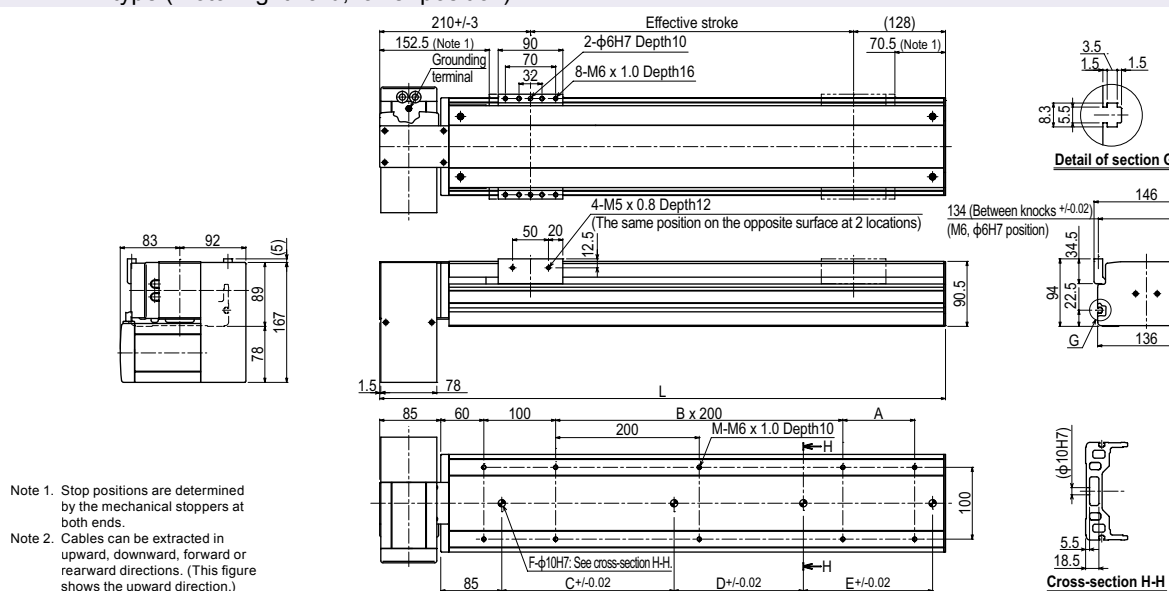

B14 LU type (Motor leftward, upper position)

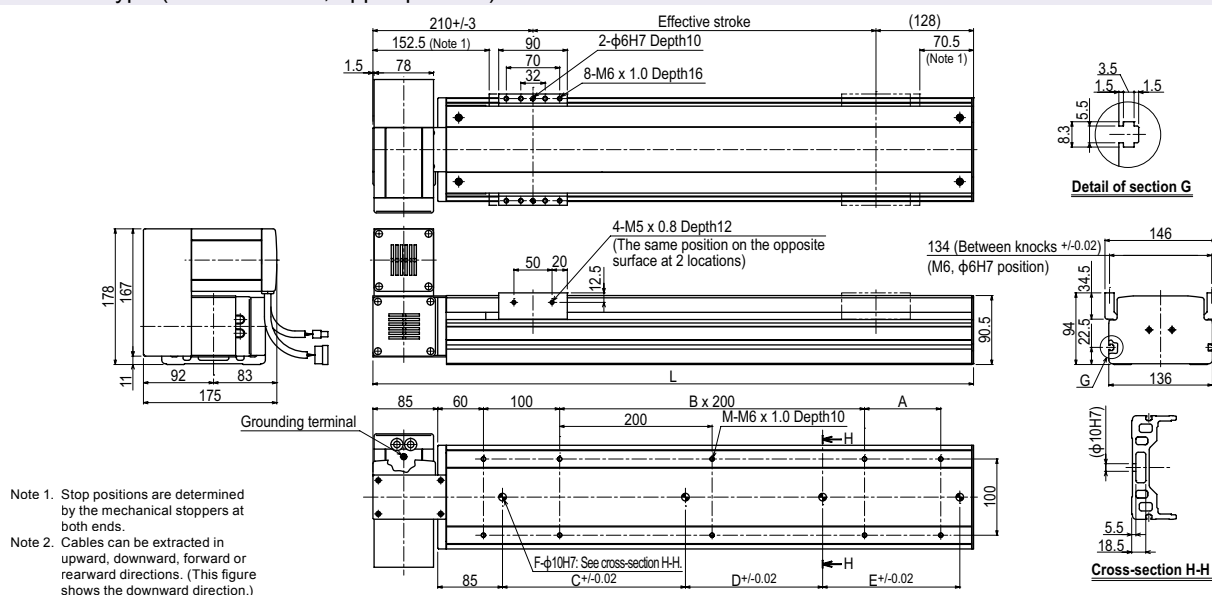

B14H



Ordering method

B14H						TSX		R		LCD monitor		I/O selection		Battery	
Model	Motor installation direction	Option	Stroke	Cable length ^{Note 1}		Positioner ^{Note 2} TS-X	Driver: Power-supply voltage Power capacity 105: 100V/100W or less 205: 200V/100W or less	Regenerative unit R: With RGT		No entry: None L: With LCD		N: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 3}		B: With battery (Absolute) N: None (Incremental)	
	L: Motor leftward, horizontal position R: Motor rightward, horizontal position LU: Motor leftward, upper position RU: Motor rightward, upper position LD: Motor leftward, lower position RD: Motor rightward, lower position	Grease type None: Standard GC: Clean	150 to 3050 (50mm pitch)	3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)											
						SR1-X	05		R			I/O selection		Battery	
						Controller	Driver: Power capacity 05: 100W or less		Usable for CE No entry: Standard E: CE marking	Regenerative unit R: With RGT		N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS		B: With battery (Absolute) N: None (Incremental)	
						RDV-X	2	10				RBR1			
						Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 10: 200W or less				Regenerative unit			

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
See P.594 for details on robot cable.
Note 2. See P.498 for DIN rail mounting bracket.
Note 3. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	200
Repeatability ^{Note 1} (mm)	+/-0.04
Belt (mm)	Equivalent to lead 25mm
Maximum speed (mm/sec)	1250 (1875 ^{Note 2})
Maximum payload (kg)	30
Stroke (mm)	150 to 3050 (100mm pitch)
Overall length (mm)	Motor installation L/R type length (mm) Another
Maximum dimensions of cross section of main unit (mm)	W146 × H94
Cable length (m)	Standard: 3.5 / Option: 5.10
Linear guide type	4 rows of circular arc grooves × 2 rail
Position detector	Resolvers ^{Note 3}
Resolution (Pulse/rotation)	16384

Note 1. Positioning repeatability in one direction.
Note 2. A regenerative unit is needed if using the SR1-X, TS-X at maximum speeds exceeding 1250mm/sec. If using the RDV-X, then the regenerative unit RBR1 is required regardless of the installation conditions.
Note 3. Position detectors (resolvers) are common to incremental and absolute specifications. If the controller has a backup function then it will be absolute specifications.

Allowable overhang^{Note}

Horizontal installation (Unit: mm)				Wall installation (Unit: mm)			
	A	B	C		A	B	C
5kg	3000	3000	1941	5kg	2074	2585	3000
10kg	2742	1697	1064	10kg	1087	1236	2071
20kg	2158	867	651	20kg	604	561	1512
30kg	1708	590	466	30kg	397	336	1106

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Static loading moment


(Unit: N·m)		
MY	MP	MR
610	555	488

Controller


Controller	Operation method
SR1-X05 ^{Note} RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105 ^{Note} TS-X205 ^{Note}	I/O point trace / Remote command
RDV-X210-RBR1	Pulse train control

Note. A regenerative unit is needed if using the SR1-X, TS-X at maximum speeds exceeding 1250mm/sec.

Motor installation The line-up consisting of six models of deferent motor installation position as follows.

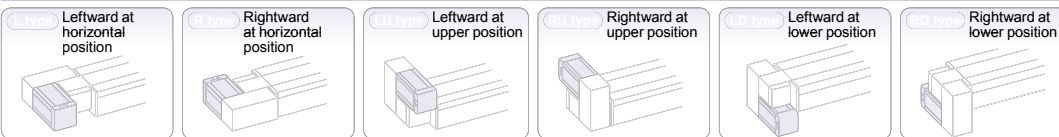

B14H R type (Motor rightward, horizontal position)

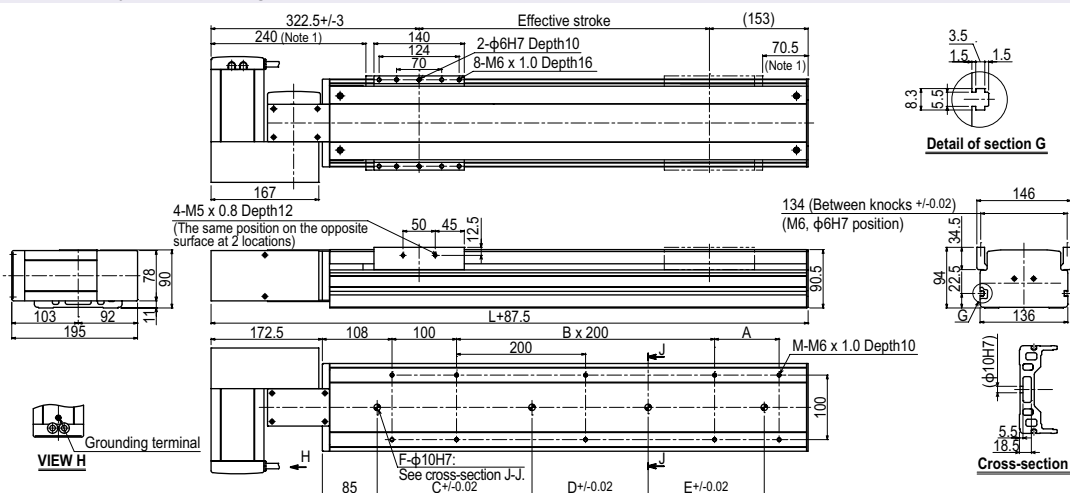

Detail of section G

Cross-section J-J


Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. Cables can be extracted in upward, downward, forward or rearward directions. (This figure shows the forward direction.)


Effective stroke	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600
L	538	588	638	688	738	788	838	888	938	988	1038	1088	1138	1188	1238	1288	1338	1388	1438	1488	1538	1588	1638	1688	1738	1788	1838	1888	1938	1988
M	6	8	8	8	8	10	10	10	10	12	12	12	12	14	14	14	16	16	16	16	16	18	18	18	18	18	20	20	20	22
A	-	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50
B	1	1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	5	5	5	5	5	6	6	6	6	7	7	7	7	8
C	240	240	420	420	420	600	600	600	600	780	780	780	780	960	960	960	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140
D	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	240	240	240	240	420	420	420	600	600
E	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
F	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3
Weight (kg)	10.9	11.5	12.1	12.7	13.2	13.9	14.4	15.0	15.6	16.2	16.7	17.4	17.9	18.5	19.1	19.7	20.2	20.9	22.0	22.1	22.6	23.3	23.8	24.4	24.9	25.6	26.1	26.8	27.3	27.9

Effective stroke	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400	2450	2500	2550	2600	2650	2700	2750	2800	2850	2900	2950	3000	3050
L	2038	2088	2138	2188	2238	2288	2338	2388	2438	2488	2538	2588	2638	2688	2738	2788	2838	2888	2938	2988	3038	3088	3138	3188	3238	3288	3338	3388	3438
M	22	22	22	24	24	24	26	26	26	26	28	28	28	28	30	30	30	30	32	32	32	32	34	34	34	34	34	36	36
A	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100	150	200	50	100
B	8	8	8	9	9	9	10	10	10	10	11	11	11	11	11	12	12	12	12	13	13	13	13	14	14	14	14	15	15
C	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140
D	600	600	600	780	780	780	960	960	960	960	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140
E	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	240	240	240	420	420	420	420	420	600	600	600	780	780	960
F	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Weight (kg)	28.4	29.1	29.6	30.3	30.8	31.4	31.9	32.6	33.1	33.8	34.3	35.0	35.5	36.1	36.6	37.3	37.8	38.5	39.0	39.6	40.1	40.8	41.3	42.0	42.5	43.1	43.6	44.3	45.4


B14H RU type (Motor rightward, upper position)

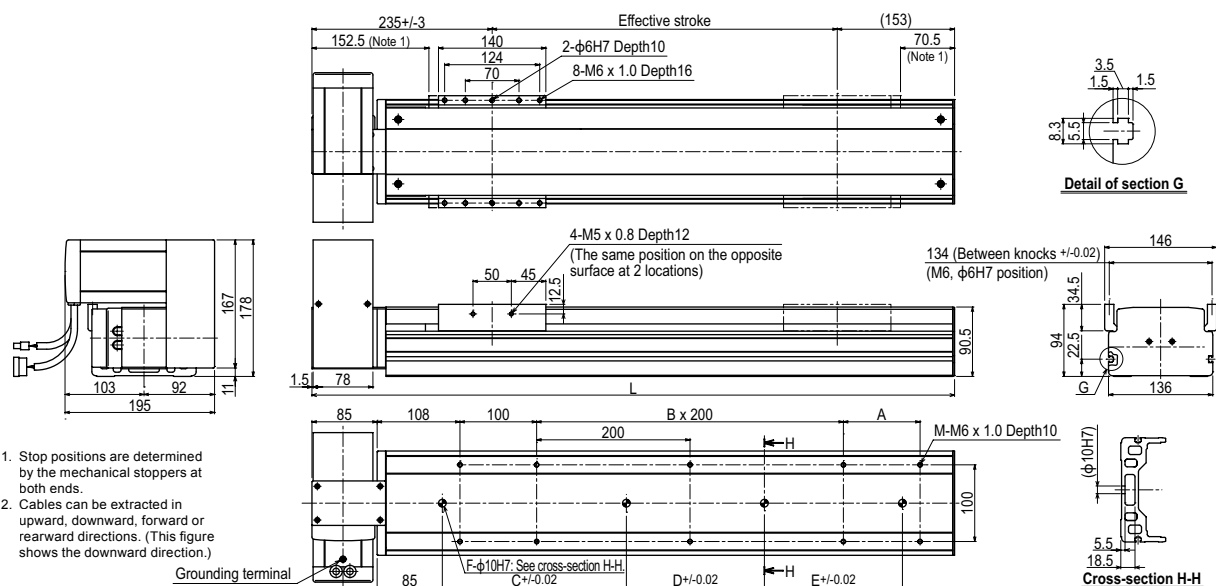

B14H RD type (Motor rightward, lower position)

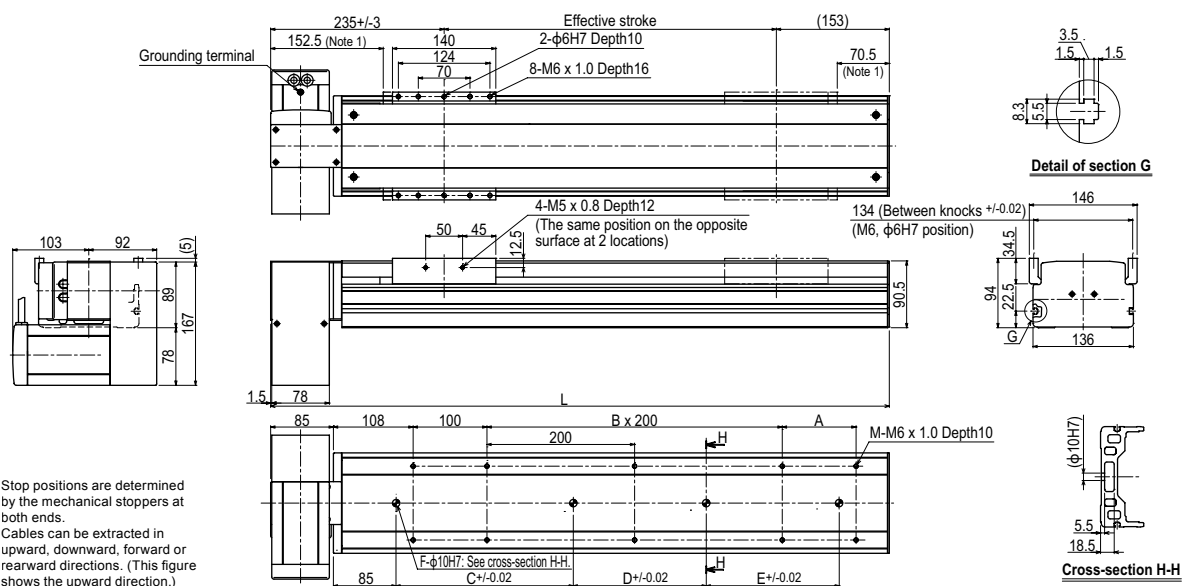

B14H LU type (Motor leftward, upper position)

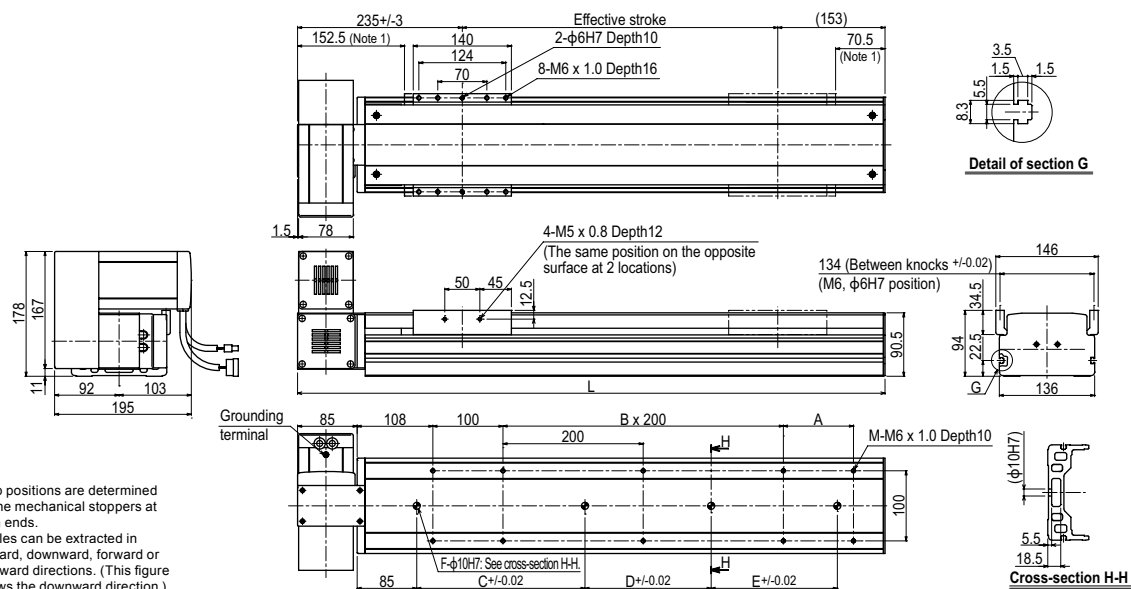



Ordering method

R5

	
Cable entry location No entry: Standard (S) B: From the side	Cable length Note 1 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)

TSX

Positioner ^{Note 2}
TS-X

Driver: Power-supply voltage / Power capacity
105: 100V/100W or less
205: 200V/100W or less

	LCD monitor
No entry:	None
L:	With LCD

I/O selection
NP: NPN
PN: PNP
CC: CC-Link
DN: DeviceNet™
EP: EtherNet/IP™
PT: PROFINET
GW: No I/O board M

	Battery
	B: With battery (Absolute)
	N: None (Incremental)

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.

See P.594 for details on robot cable.

Note 2. See P.498 for DIN rail mounting bracket.

Note 3. Select this selection when using the gateway function. For details, see P.60.

SR1-XController

05
Driver: Power capacity
05: 100W or less

Usable for CE
No entry: Standard
E: CE marking

I/O selection	
N:	NPN
P:	PNP
CC:	CC-Link
DN:	DeviceNet™
PB:	PROFIBUS

	Battery
	B: With battery (Absolute)
	N: None (Incremental)

RDV-X

Driver

2
Power-supply voltage
2: AC200V

05
Driver: Power ca
05: 100W or less

– **RBR1**


– **Regenerative unit**

■ Specifications

AC servo motor output (W)	50
Repeatability (°)	+/-0.0083
Maximum speed (°/sec)	360
Maximum allowable moment inertia (kgm ² [kgfcm ²])	0.12 [1.2]
Rated torque (Nm[kgfm])	5.29 [0.54]
Speed reduction ratio	1/50
Rotation range (°)	360
Cable length (m)	Standard: 3.5 / Option: 5.10
Speed reducer type	Harmonic drive
Position detector	Resolvers
Resolution (Pulse/rotation)	16384

■ Maximum allowable moment inertia

Payload parameters W (kg)	1	2	3	4	5	6	7	8	9	10
Maximum allowable moment inertia J (kgfcm ^s ²)	0.12	0.24	0.36	0.48	0.60	0.72	0.84	0.96	1.08	1.20




Note. When the weight of a tool or workpiece attached to the shaft R5 is W (kg), its moment of inertia (J) must be smaller than the values shown in the table above. (For example, enter 4kg if W is 3kg and J is 0.48kgf cm sec^2 .) Enter the above mass parameter value for the controller, and optimum acceleration is automatically set based on this value.

Note. For calculation (equation) of the inertia moment, please refer to P.611.

Controller

Controller	Operation method
SR1-X05 RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105	I/O point trace /
TS-X205	Remote command
RDV-X205-RBR1	Pulse train control

R5

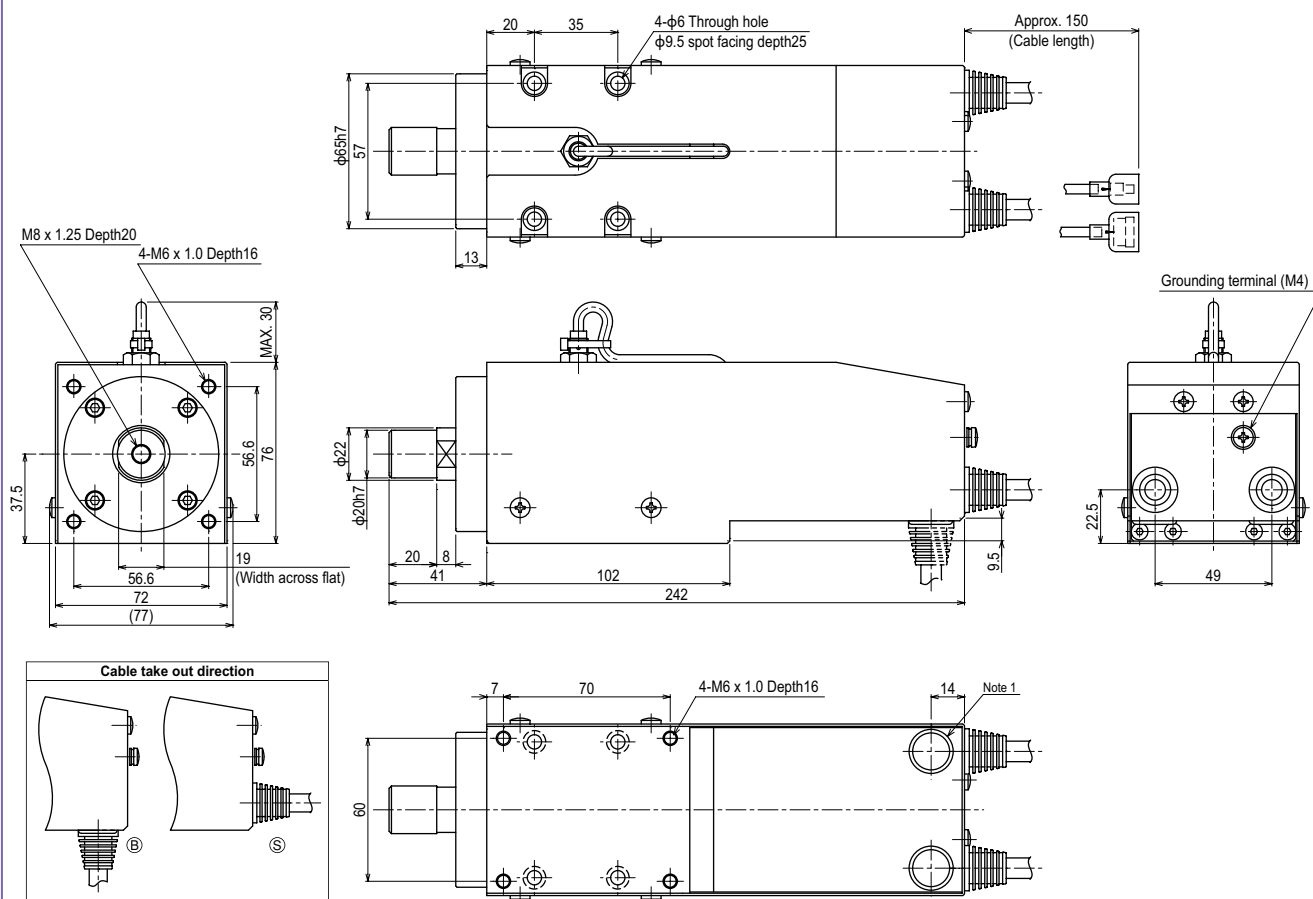

Weight (kg)	3.0
-------------	-----

Note 1.The cable extraction port can be changed.

R10



Ordering method

R10		TSX				
Model	Cable entry location No entry: Standard (S) B: From the side	Positioner ^{Note 2} TS-X	Driver: Power-supply voltage / Power capacity 105: 100V/100W or less 205: 200V/100W or less	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 3}	Battery B: With battery (Absolute) N: None (Incremental)
Cable length ^{Note 1} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)		SR1-X	05			
		Controller	Driver: Power capacity 05: 100W or less	Usable for CE No entry: Standard E: CE marking	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	Battery B: With battery (Absolute) N: None (Incremental)
		RDV-X	2	05	RBR1	
		Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 05: 100W or less	Regenerative unit	


Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
See P.594 for details on robot cable.
Note 2. See P.498 for DIN rail mounting bracket.
Note 3. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	100
Repeatability (°)	±0.0083
Maximum speed (°/sec)	360
Maximum allowable moment inertia (kgm ² [kgfcm ²])	0.36 [3.71]
Rated torque (Nm[kgfm])	10.78 [1.10]
Speed reduction ratio	1/50
Rotation range (°)	360
Cable length (m)	Standard: 3.5 / Option: 5,10
Speed reducer type	Harmonic drive
Position detector	Resolvers
Resolution (Pulse/rotation)	16384

Maximum allowable moment inertia

Payload parameters W (kg)	1	2	3	4	5	6	7	8	9	10
Maximum allowable moment inertia J (kgfcm ²)	0.25	0.49	0.74	0.99	1.24	1.48	1.73	1.98	2.23	2.47
Payload parameters W (kg)	11	12	13	14	15					
Maximum allowable moment inertia J (kgfcm ²)	2.72	2.97	3.22	3.46	3.71					




Note. When the weight of a tool or workpiece attached to the shaft R10 is W (kg), its moment of inertia (J) must be smaller than the values shown in the table above. (For example, enter 4kg if W is 3kg and J is 0.99kgf cm sec².) Enter the above mass parameter value for the controller, and optimum acceleration is automatically set based on this value.

Note. For calculation (equation) of the inertia moment, please refer to P.611.

Controller

Controller	Operation method
SR1-X05 RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X105 TS-X205	I/O point trace / Remote command
RDV-X205-RBR1	Pulse train control

R10

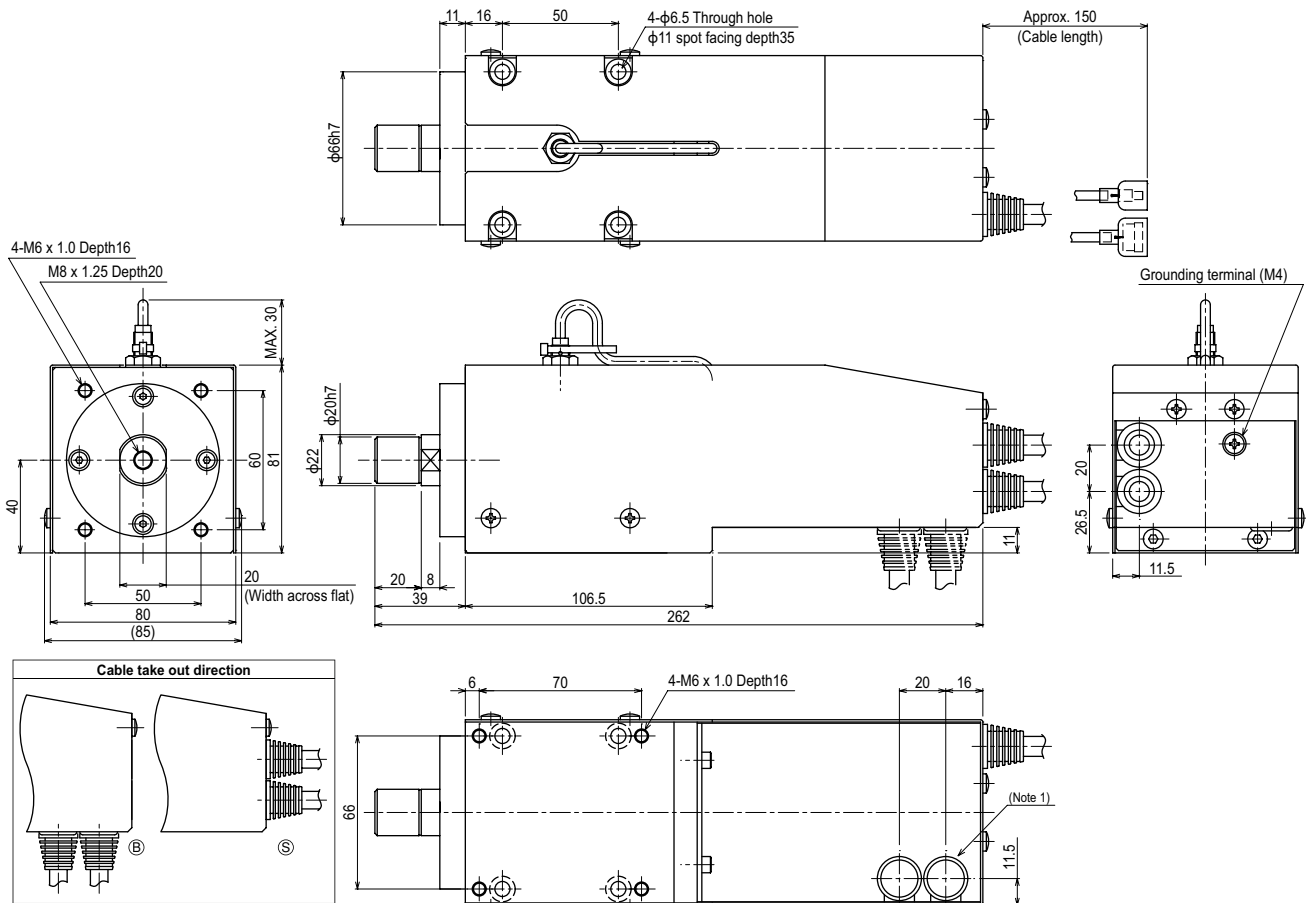

Weight (kg)	3.5
-------------	-----

Note 1. The cable extraction port can be changed.

Controller

SR1-X ▶ 516 **TS-X ▶ 490** **RDV-X ▶ 504**

R20



Ordering method

R20		TSX					
Model	Cable entry location No entry: Standard (S) B: From the side	Cable length ^{Note 1} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	Positioner ^{Note 2} TS-X	Driver: Power-supply voltage / Power capacity 110: 100V/200W or less 210: 200V/200W or less	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ PT: PROFINET GW: No I/O board ^{Note 3}	Battery B: With battery (Absolute) N: None (Incremental)
		SR1-X		10			
		Controller	Driver: Power capacity 10: 200W or less	Usable for CE No entry: Standard E: CE marking			Battery B: With battery (Absolute) N: None (Incremental)
		RDV-X		2	10	RBR1	
		Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 10: 200W or less	Regenerative unit		

Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable.
See P.594 for details on robot cable.

Note 2. See P.498 for DIN rail mounting bracket.


Note 3. Select this selection when using the gateway function. For details, see P.60.

Specifications

AC servo motor output (W)	200
Repeatability (°)	+/-0.0083
Maximum speed (°/sec)	360
Maximum allowable moment inertia (kgm^2 [kgfcm^2])	1.83 [18.7]
Rated torque (Nm [kgfm])	21.46 [2.19]
Speed reduction ratio	1/50
Rotation range (°)	360
Cable length (m)	Standard: 3.5 / Option: 5,10
Speed reducer type	Harmonic drive
Position detector	-
Resolution (Pulse/rotation)	16384

Maximum allowable moment inertia

Payload parameters W (kg)	1	2	3	4	5	6	7	8	9	10
Maximum allowable moment inertia J (kgfcm^2)	0.93	1.8	2.8	3.7	4.6	5.6	6.5	7.4	8.4	9.3
Payload parameters W (kg)	11	12	13	14	15	16	17	18	19	20
Maximum allowable moment inertia J (kgfcm^2)	10.2	11.2	12.1	13.1	14	14.9	15.9	16.8	17.7	18.7




Note. When the weight of a tool or workpiece attached to the shaft R20 is W (kg), its moment of inertia (J) must be smaller than the values shown in the table above. (For example, enter 4kg if W is 3kg and J is 3.7kgf cm sec^2 .) Enter the above mass parameter value for the controller, and optimum acceleration is automatically set based on this value.

Note. For calculation (equation) of the inertia moment, please refer to P.611.

Controller

Controller	Operation method
SR1-X10 RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X110 TS-X210	I/O point trace / Remote command
RDV-X210-RBR1	Pulse train control

R20

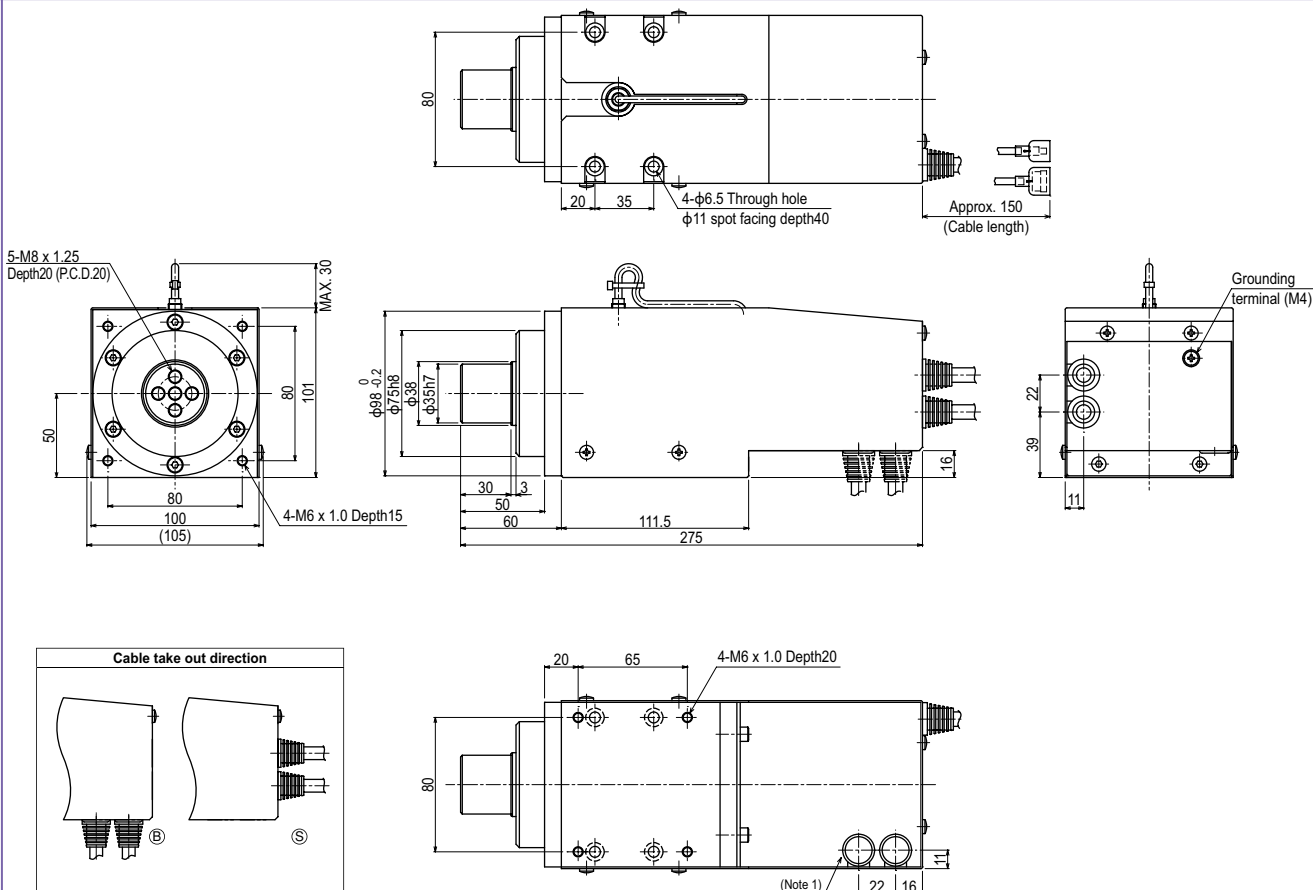

Weight (kg)

5.5

Note 1. The cable extraction port can be changed.

Controller

SR1-X ▶ 516

TS-X ▶ 490

RDV-X ▶ 504